


700LQT SERIES FEATURES

700LQT/ECM

超高速电脑包缝机 搭配步进式切刀

Mechatronic High Speed Overlock Sewing Machine with Stepping Motor Drive Tape/Thread Cutter

将高速直驱伺服马达、电控箱、电源开关完全整合於缝纫机中，并支援多种选配功能，实现一体直驱化的包缝机。

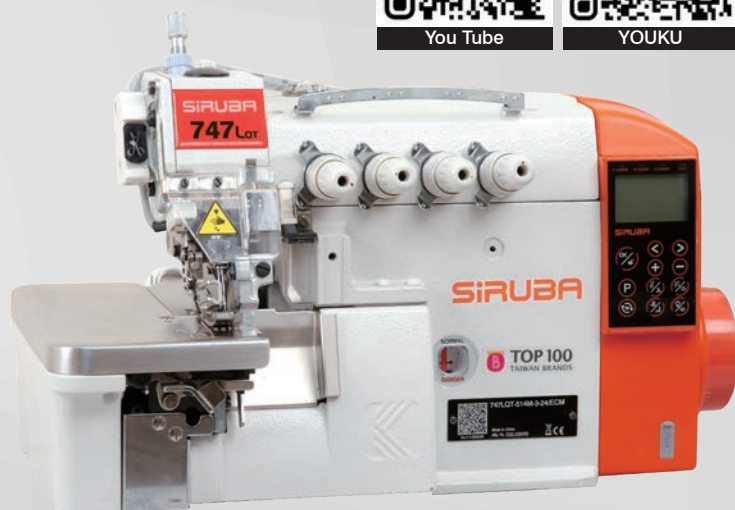

You Tube



YOUKU

700LQT is equipped with high-speed direct drive servo motor, electric control box, and power switch. In addition, it supports a variety of optional functions to become an all-in-one direct drive overlock sewing machine.

700LQT/ LFM/LFA

超高速电脑包缝机
搭配步进送带装置

Mechatronic High Speed Overlock Sewing Machine with Stepping Motor Drive Elastic Tape Feeding Device

利用步进马达带动松紧带，使其放松到零松紧状况，并可控制所需松紧带之长短，使车缝时松紧度能一致外，还能达到转速超高，效率增加之实。

Elastic feeding driven by stepping motor. It controls elastic length fed as required, and ensures consistent tension during sewing with high speed to increase efficiency.

※ LFA为选配件 LFA Optional



You Tube




YOUKU




特点

FEATURES

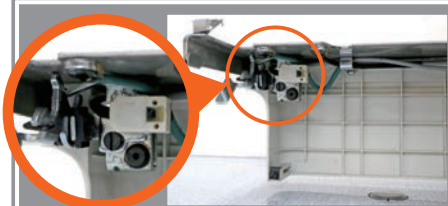

布盖板安全感应装置
Cloth cover safety sensor

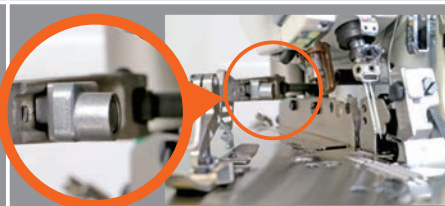

抬压脚安全感应装置
Presser foot lift safety sensor



切刀安全感应装置
Cutter safety sensor

ECM

步进式切刀

STEPPING MOTOR DRIVE TAPE/THREAD CUTTER

- 1 自动切刀装置**
电眼侦测到布料前后边缘时，切刀会精准下刀，自动切断空车线。搭配吸风线槽，操作更顺畅。
Automatic thread cutter device
When sensor detects the front and rear edges of the fabric, the cutter automatically will cut the thread. Compatible with air suction slot, which makes the operation more smoothly.
- 2 手动切刀按键**
如因操作问题没有切断线，可由此按键进行手动切线。
Manual trimming button
If the thread was not cut due to the operation, it can be done by using manual cutter button.
- 3 可调式电眼装置**
针对网纱、强反光丝光棉等特殊面料，采用专业的电控程式控制，均能轻松车缝及完成切线，不会造成切刀误切。
Adjustable sensor device
For special fabrics such as mesh yarn and strong reflective mercerized cotton, professional electric control program is adopted, which can easily sew and complete thread trimming without causing cutting mistake.
- 4 多功能一体机更节能、性能更好**
It supports a variety of optional functions with mechatronic design, energy-efficient and performs well.
高速稳定的伺服马达运转更平稳
High speed stable servo motor to ensure the stability of operation.



微油润滑技术提供乾净清爽的缝制体验
Micro-oil lubrication technology keeps sewing process clean from oil pollution.

自动抬压脚装置
脚踏踏板回踏，抬升压脚，操作快速方便，减少不必要的体力消耗，制程速度产量加倍。
Automatic presser foot lifter
Pressing the foot pedal backward to lift the presser foot, enabling quick and convenient operation, doubling the production speed and output.

简易防卷边装置 (KB301 选配件 Optional)
安装容易，透过装置有效辅助卷曲布料工段之车缝。
Simple anti curly selvedge device
Easy to install, effectively solve curly edge problem.



LFA
选配件 Optional



KB301
选配件 Optional

针棒采用全新密封式油封设计，钻石涂层勾针油脂润滑，缝制时无油污、无油渍飞溅，可大幅提升缝制产量，同时提高生产品质与减少缝制品脏污的困扰。
The needle bar adopts brand new oil seal design, diamond coating looper lubricated with grease. There is no oil stain or oil spray during sewing, it can increase sewing output greatly, while improving the production quality and reducing the trouble of oil stains.

规格

SPECIFICATIONS

700LQT	布料厚度 Fabric Weight												配件 Device
	L	M	H										
737LQT-504M-3-04/ECM				1	2	-	4	0.7~2	3.6	6	#11	6500	KB301
747LQT-514M-3-24/ECM				2	4	2	4	0.7~2	3.6	5.5	#11	6500	KB301
757LQT-516M-3-5/ECM				2	5	3,5	5	0.7~2	3.6	5.5	#11 #14	6500	KB301
737LQT-504M-3-04/LFM				1	2	-	4	0.7~2	3.6	6	#11	6000	LFA
747LQT-514M-3-24/LFM				2	4	2	4	0.7~2	3.6	5.5	#11	6000	LFA

NOTE: For more information regarding the specification, please visit our website www.siruba.com



高林股份有限公司
KAULIN MFG. CO., LTD.

由於对产品的改良及更新，本产品型录中之产品规格及外观的修改恕不事先通知！
The specification and/or appearances of the equipment described in this catalogue are subject to change without previous notice because of modification.

C.S2023-25. MAY. 2024