

600KP | Series

高速直驱包缝机


High Speed Overlock Machine
with Direct-Drive



特点

FEATURES

- 1** 密封式直接传动针棒专利机构
— 密闭针棒室，防尘防脏污渗入，避免漏油。
— 缝制动能沿针棒运动方向直接传达，有效提升缝纫高速化及耐久性；避免连杆式针棒之传动耗损。
Sealed type direct drive needle bar mechanism
- Dust free and oil-leakage-free are due to entirely sealed needle bar section design.
- Direct drive needle bar system leads to high speed and long durability.No driving loss of connecting-rod-drive needle bar system.
- 2** 专利双刮双唇式送具防漏设计
除双刮板外又新增双唇式刮板，阻油防油效果较原有双刮板设计效果更佳。
Patented feed dog mechanism oil proof system
New double-lip type wiper is added to support the original double wiper. Oil proof function is upgraded.
- 3** 新型切刀机构
刀座轴心低式设计，可防止面料回推现象，使面料切断时不会产生卷边现象。
New fabric trimmer mechanism
Low axis knife holder prevents cloth rolls up after trimming.
- 4** 全新强制供油/回油及滤油系统
针棒，上勾针机构采用强制给油及全密闭式真空回油机构，完全排除以油线供油或滴落式供油产生问题。
Active lubrication system
Needle bar and upper looper mechanisms are applied active oil supply and entirely sealed vacuum oil return system. The new system exceeds the traditional oil supply of rope type and dropping type.
- 5** 更多便於使用的特点...
— 免开盖针高调整，操作便利
— 下勾针座前後微调机构，维修省时简易
— 环缝微调机构，开後盖调粗细针，迅速省时
— 针板出线槽设计，包缝/环缝出线线圈更柔软完美
More user friendly features:
- Needle bar height adjustment without opening machine.
- Lower looper holder fine tune mechanism.
- Chainstitch fine tune mechanism: Open the rear cover to adjust stitch length easily.
- Needle plate thread groove leads to perfect loop.
- 5 cm height sewing area offers better cloth movement.
- 6** 直接传动式送具机构
直接传动可防止差动输送过度，缝绉更准确顺畅，不用调整差动齿，避免连杆式送具之传动耗损。
Direct drive feeding mechanism
Direct drive mechanism prevents overdoing of differential feeding. No need to adjust the differential feed dog. No drive loss of connecting rod and type feeding mechanism.
- 7** 可选配专用送具车缝超薄布料
例如：标准品齿距为1.6mm
A 选购品齿距为0.8mm
B 选购品齿距为1.0mm
Feed dog for extra light weight fabric (Optional)
E.g.: Standard: Teeth spacing 1.6mm
A (Optional): Teeth spacing 0.8mm
B (Optional): Teeth spacing 1.0mm
- 8** 可选配短压具舌车缝厚布料或长压具舌车缝薄布料，让车缝线迹更加完美。
Optional presser foot fingers for better sewing performance: short finger for heavy fabric, long finger for light fabric.

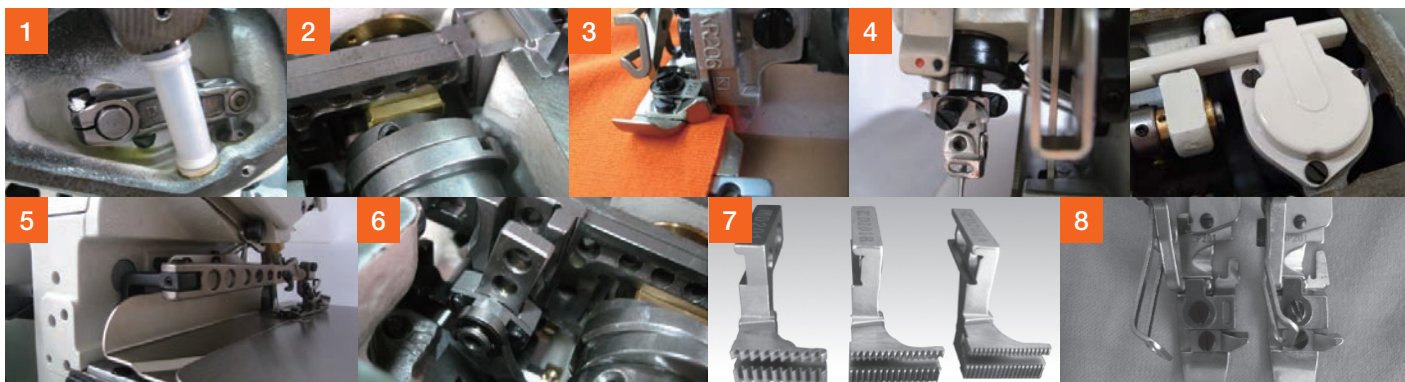

规格

SPECIFICATIONS

600KP	布料厚度 Fabric Weight											
	L	M	H									
637KP-504M2-04				1	3	-	4	0.7-2	3.6	6	#11	6500
637KP-504M2-04/VT				1	3	-	4	0.7-2	3.6	6	#11	6500
647KP-514M2-24				2	4	2	4	0.7-2	3.6	5.5	#11	6500
647KP-514M2-24/ECB-Q				2	4	2	4	0.7-2	3.6	5.5	#11	6500
657KP-516M2-35				2	5	3	5	0.7-2	3.6	5.5	#14	6500
657KP-516M2-35/CT				2	5	3	5	0.7-2	3.6	5.5	#14	6500



高林股份有限公司
KAULIN MFG. CO., LTD.

由於对产品的改良及更新，本产品型录中之产品规格及外观的修改恕不事先通知！
The specification and/or appearances of the equipment described in this catalogue are subject to change without previous notice because of modification.

DEC. 2023