

ASC-EWA100

Automatic Elastic Waistband Attaching
Machine


自動上內褲鬆緊帶機



You Tube



YOUKU

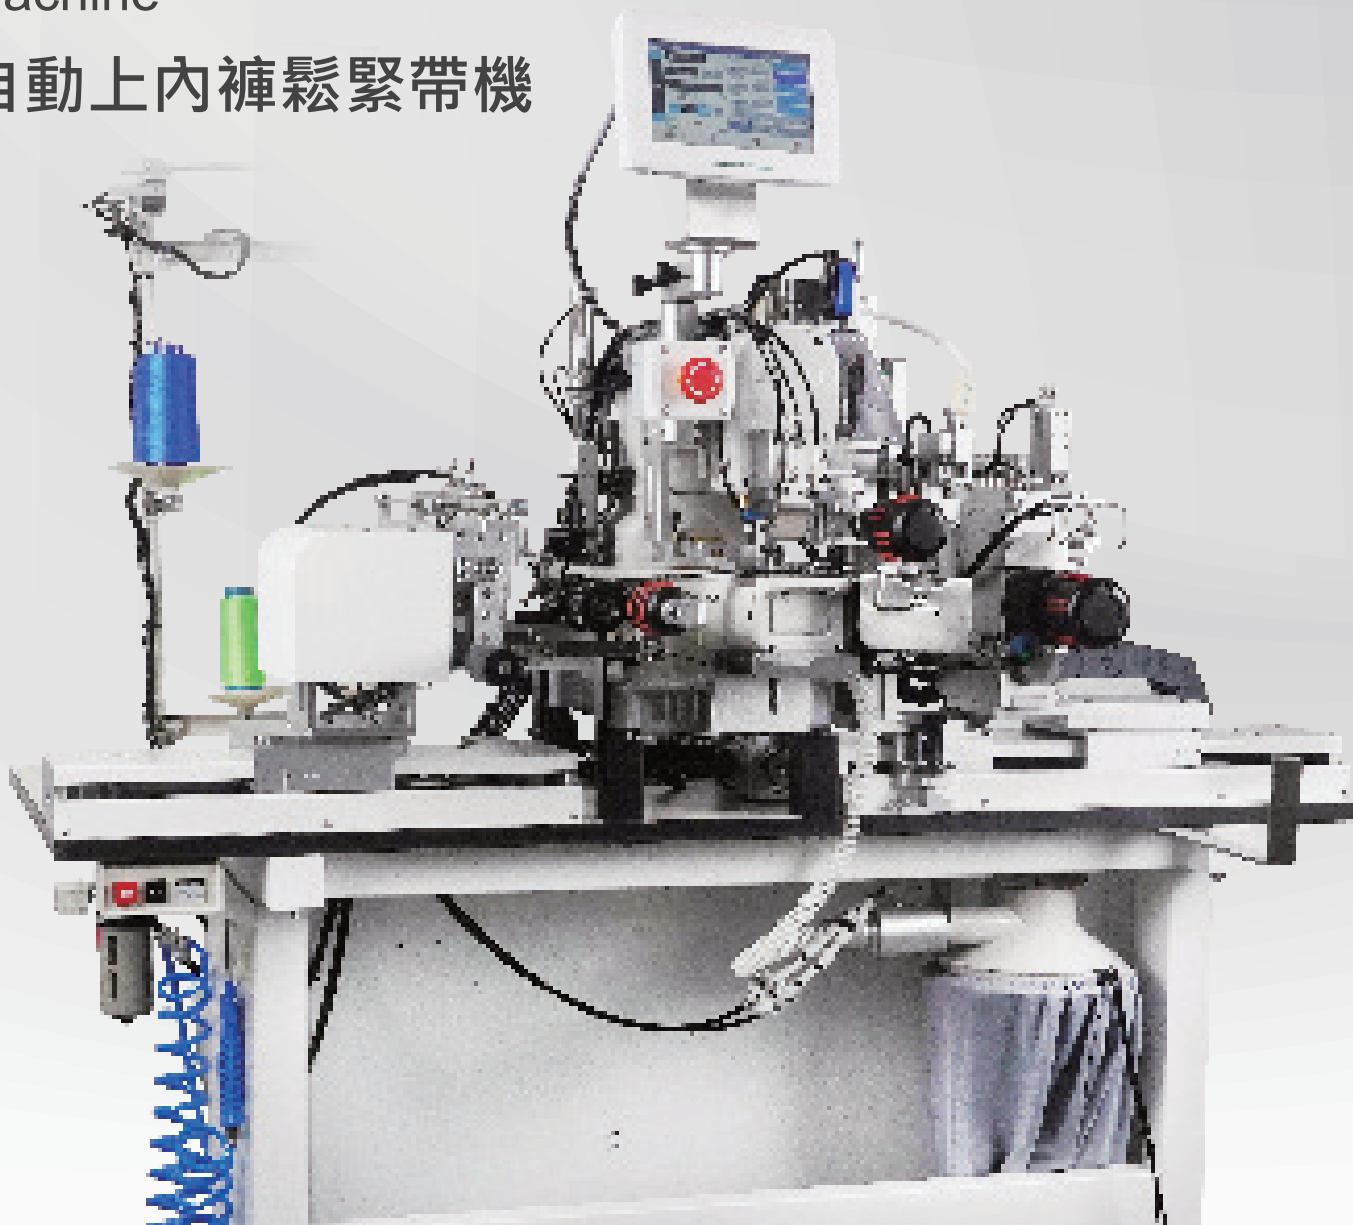


穩定的縫紉尺寸可以提高效率，在隨後的過程中確保對接穩定、高品質。

Precise stitching ensures greater efficiency and reliability for a high-quality seams everytime.

特點

FEATURES

- 1 多功能操作面板，支援各國語言一鍵切換。
Multifunctional control panel, Supports one-touch switching between multiple languages.
- 2 斷線檢測裝置。
Thread break detection system.
- 3 預先自動上料，無需人工對骨。
Pre-feeding automatically, no manual seam alignment required.
- 4 分離式撐開輪、自動尋股、自動糾偏。
Separate spreading wheel, automatic thread detection, automatic correction.
- 5 多點感測，自動對邊、自動車縫，效率更高。
Multi-point sensor with Automatic edge alignment enables automatic sewing for maximum productivity.
- 6 多股吹氣防捲邊。
Air-blowing technology for anti-curl edges.
- 7 網底線內保的止口寬度均勻。
Ensures Underlay Thread Width is Even and Precise.

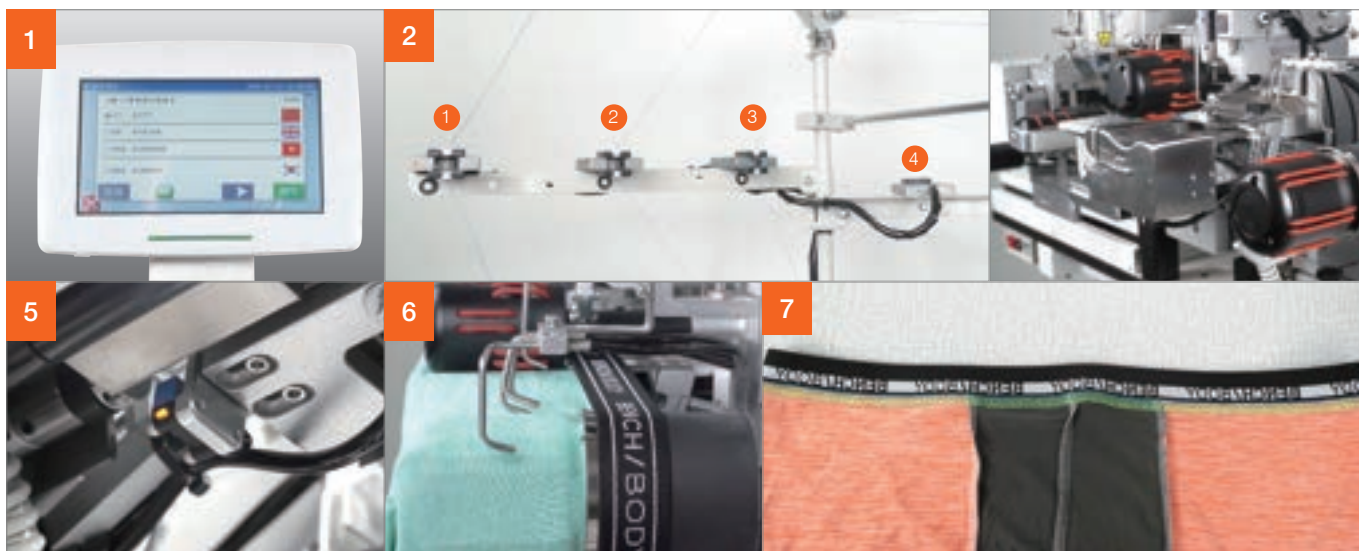

規格

SPECIFICATIONS

型號 Model	ASC-EWA100		
縫紉機機頭 Machine Head	SiRUBA C007L-W532-364/CR/UTP/DCLH1-1/C007L-W532-356/CR/UTP/DCLH1-1		
車縫速度 Sewing speed	5000 RPM (最高 Max)	摺邊寬度 Folded Edge Width	15~30 MM
車縫範圍 Sewing Range	35~60 CM (中心對折距) 35~60 CM (center fold distance)	氣壓 / 耗氣量 Air Pressure/Air Consumption	>4 BAR / 120L
產能 Capacity	180~240 件 / 小時 180~240 PCS / Hour	車縫針碼可調 The sewing needle code is adjustable	15~40 MM
機器尺寸 Dimensions	(W)1380 × (D)830 × (H)1540mm		



由於對產品的改良及更新，本產品型錄中之產品規格及外觀的修改恕不事先通知！
The specification and/or appearances of the equipment described in this catalogue are subject to change without previous notice because of modification.