

BT SERIES

銀箭牌

Electronic High-speed Lockstitch Bartacking /
Button Sewing/ Small Area Pattern Sewing Machine

電子高速平縫加固/鈕扣縫紉/小面積花樣縫紉機



機 型

MODEL



BT430Q-01 / 02
01標準Standard/02厚料Heavy material



BT430Q-03
帽眼 Radial tacking



BT430Q-05
褲耳 Belt loop



BT430Q-06
鬆緊帶拼接 Elastic Band Joining




BT430Q-07
針織 Knits material



BT438Q
鈕扣 Button sewing



BT530Q 兩用型 套結/鈕扣
2-in-1 Bartacking/ Button sewing



BT630Q 小型花樣機(80x60)
Small Area Pattern Sewing (80x60)

※BT530Q：出廠時為套結機，鈕扣套件附在配件盒中，用戶可以操作面板切換車縫模式

※BT530Q：Bartacking is the standard setting, while the button sewing kit is included. Customer can change the sewing mode by control panel.


 **SIRUBA**

特點

FEATURES

無油機構設計：
採用DLC 針棒，挑線機構軸承設計，以
固態油脂潤滑，有效防止面料油污問題。

Oil-free Mechanism Design:
With DLC needle bar, thread take-up
lever's bearing design, and grease
lubrication, it avoids the problem of
oil stain.



操作面板內建USB埠：
以USB 記憶體進行圖形資
料儲存，方便快速。

Control Panel with Built-
in USB port:
It is easy and convenient
for Pattern input by USB
memory.



- 1 雙踏板模式：**
支援雙踏板操作模式，縫製特殊產品時，定位更容易。

Dural Pedal Mode：

Support double pedal mode for special sewing operation. It makes the material positioning easier.

- 2 適用範圍大：**
中厚料規格，可以改進挑線行程，提高線跡穩定度，擴大厚料縫製性能。


Wider Range of Sewing Application：

For heavy material, with thread take-up lever's stroke changing, it makes the stitches stable and upgrades the sewing performance.

- 3 短線頭設計：**
改進切線結構，在針孔最近點線，使餘
線長度變短，減少修線工作。

Short Thread End Design：

Improving the thread trimming
mechanism to cut the thread at the
nearest spot from the needle. It
shortens the thread end and reduces
the finishing job.

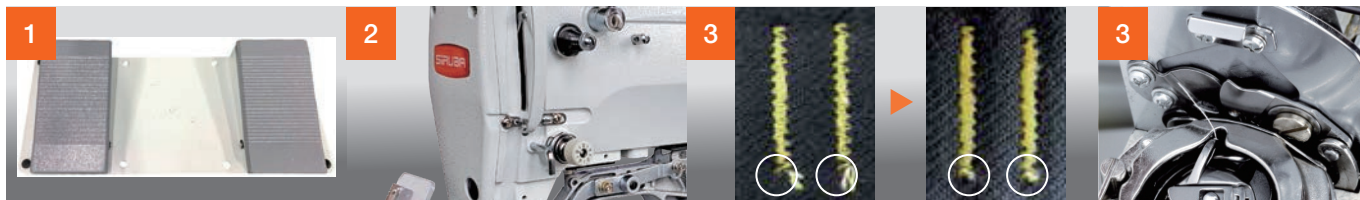

規格

SPECIFICATIONS

代號 Code	BT430Q						BT439Q	BT438Q	BT530Q	BT630Q
	01	02	03	05	06	07				
用途 Application	標準 Standard	厚料 Heavy material	帽眼 Radial tacking	褲耳 Belt loop	鬆緊帶拼接 Elastic Band Joining	針織 Knits material	立扣 Mushroom button sewing	釘扣 Button sewing	兩用型 套結 / 釘扣 2-in-1 Bartacking/ Button sewing	小型花樣機 Small Pattern Sewing
最高縫製速度 Max. Sewing Speed	3200 S.P.M.						2700 S.P.M.			3000 S.P.M.
縫製區域 (X x Y) Sewing area (X x Y)	40X30	40X30	15X15	40X30	9X40	40X30	6.4X6.4		40X30	80X60
鈕扣尺寸 Button Size							12mm	8~30mm		
送布方式 Feeding	間歇性送布 (布進馬達驅動) · Intermittent Feeding (Stepping motor drive mode)									
針距 Stitch length	0.05~12.7 mm									
最大針數 Max. stitch	5000 針/ 圖形 · 5000 stitch / pattern									
抬壓腳 Presser foot lifter	布進馬達驅動 · Stepping motor drives									
壓腳 / 鈕夾上升量 Height of Presser foot/ Button clamp Lifting	Max. 17mm						Max. 13mm		Max. 17mm Max. 13mm	Max. 17mm
旋梭 Hook	半旋轉標準旋梭 · Standard Shuttle hook									
外部資料儲存 External Data storage	經由 USB 埠 Inputted by USB Port									
循環縫 Cycle program	最多30 組, 每組上限50個步驟 · Max. 30 sets, each set includes Max. 50 steps.									
記憶容量 Memory Capacity	內建 89種圖形, 最多可追加 512種圖形 / 500,000針 Built-in 89 patterns, Max. 512 patterns / Max. 500,000 stitches can be added.									
馬達 Motor	直驅式 AC伺服馬達 550W · Direct-drive AC Servo Motor 550W									
電源 Power	單相 220V · Single Phase 220V									
重量 Weight	機頭: 約 57 kg, 操作面板: 約 0.4 kg, 控制箱: 約 9 kg · Machine Head: about 57 kg, Operation Panel: about 0.4 kg, Contro Box: about 9 kg									



高林股份有限公司
KAULIN MFG. CO., LTD.

由於對產品的改良及更新，本產品型錄中之產品規格及外觀的修改恕不事先通知！
The specification and/or appearances of the equipment described in this catalogue
are subject to change without previous notice because of modification.