

SIRUBA

銀箭牌
WWW.SIRUBA.COM



You Tube



YOUKU



C007L SERIES

C007L 超高速筒型绷缝机
Ultra High Speed Cylinder Bed Interlock Stitch Machine

C007LX 微油超高速筒型绷缝机
Semi-Dry Ultra High Speed Cylinder Bed Interlock Stitch Machine

针棒采用特殊的表面处理，缝制时无油污油渍，显著提高缝制品质，减少重工与缝制品脏污垢。针棒润滑机构同时再进化，增加零件耐久度

Needle bar mechanism re-designed with new surface treatment, no oil stains and oil splash during operating, greatly increase sewing quality. Needle bar also has better durability due to new lubrication mechanism.



KAULIN



1 针棒与勾针的新油封结构

新的油封设计强化了机构的油附着力，减少了润滑油甩出。此外，高耐磨材料显著提高性能及耐久性。

New Oil Sealing Technology

New oil sealing structure used on needle bar and looper mechanism can efficiently avoid oil splash. New wear-resistant material also enhances performance and durability.

2 新型散热结构同时降低振动

全新散热设计提供最佳降温效果。更稳固的防震结构，提升机械的安定与精度，车缝体验更为顺畅。

New Cool Down Technology

Frame structure renewed with better cooling mechanism. Vibration is also reduced to contribute better sewing experience.

3 直感式的差动送具调整

差动送具的调整机构设计在缝纫机本体的右后方，於车缝时使用右手直感操作，精准无误。

Easy-to-adjust Differential Feed Dog Design

The differential feed dog adjuster is placed at right side of the operator. Adjust it easily without hesitation.

RH

弧型筒式超高速绷缝机

Ultra High Speed Cylinder Bed Interlock Stitch Machine



1 内缩式床台

缝制物更靠近针孔，车缝定位精准，车缝时更加顺畅就手。

The Recessed Machine Bed

With the recessed machine bed, sewing material comes closer to the needle hole, thus provides more precise easier, and smoother sewing.

2 弧型短筒座的设计

改良传统式绷缝机的棱角筒座，RH的弧型设计让送料的缝制过程更顺畅，且使操作时的取、放更为省力，可因应广泛的饰盖缝纫工程，增加延伸盖就可以车缝边或包带之缝纫工程。

Shortened cylinder bed with arc shape design

Improved from traditional interlock stitch machine, this new RH arc design leads to a more easier sewing process. It is also applicable for covering seam and for tape binding with extended cover.

3 直觉式操作

RH 弧型筒式绷缝机，采直觉式放入布料，有效降低因人工疲劳操作所造成的不良率、提升生产效率。更适用于 T 恤圆领等缝制工艺。

More user-friendly operation

This new design makes fabric feeding more user-friendly and makes sewing process more easier and increases productivity. It is the best option for sewing T-Shirt's ribbed collar.

4 RCH-3M (三合一) 一般平缝/下摆车缝/拷克倒骨盖缝

平缝、折下摆、倒骨三合一，更换方便，多样化功能，高效率、低成本。

RCH-3M [3 in 1] : GENERAL SEAMING/BOTTOM HEMMING/COVERING STITCH (Fold-down type)

3-in-1 model for multifunctional and efficient production with lower cost.






CR 右切刀装置

Right Side Fabric Trimmer

修齐右边或右下方多余之布料，使衣物车缝後更加整齐美观；附加吸布屑装置更能保持工作环境乾淨
Right hand side waste fabric trimming with waste suction device makes fabric edge aligned to seam and keeps the working area clean.

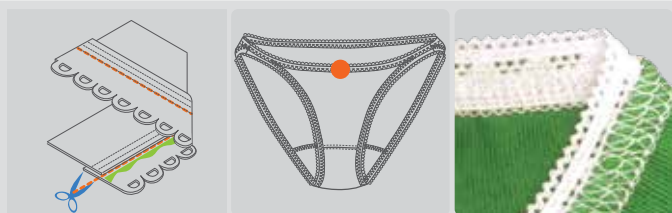


松紧带 / 蕾丝松紧带上带车缝附右切刀

经由上送带装置，控制长度与张力，附右切刀修布装置，能於车缝前将布修齐，更能提高车缝品质，如女用内衣裤之松紧带或蕾丝松紧带车缝。

ELASTIC / LACE ATTACHING WITH RIGHT SIDE FABRIC TRIMMER

Top feeding devices ensure even length and tension controlled by electric digital controller, with right side fabric trimmer for elastic or lace attaching smoothly and properly on women's underwears.

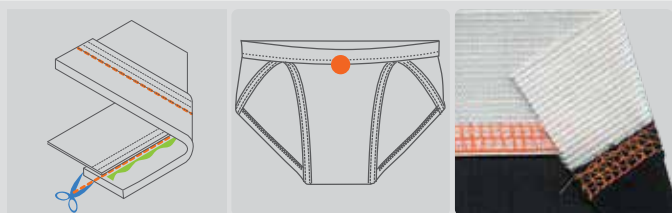

环型松紧带裤头接缝附右切刀

将环型平织松紧带与衣物接缝适用於男女内裤裤腰之松紧带缝合，配合右切刀修布装置，更能提高缝制品质。

TUBULAR JACQUARD ELASTIC WAISTBAND ATTACHING WITH RIGHT SIDE FABRIC TRIMMER

For tubular elastic or lace waistband attaching on men's or women's brief, with right hand side fabric trimmer to increase sewing quality and efficiency.



CRL 左切刀装置

Left Side Fabric Trimmer

修齐二片布接缝之左下方多余之布料，使衣物车缝後更加整齐美观
Left hand side fabric trimming makes fabric edge aligned to seam.


左切刀下摆车缝

附左切刀修齐布边後，再进行下摆车缝工程，适用於车缝T恤、汗衫之下摆等。

BOTTOM HEMMING WITH LEFT SIDE FABRIC TRIMMER

Left hand side fabric trimming before hemming. For sleeve opening and bottom of underwears, T-shirt, or sportswears, etc...

* 薄布料建议选购 W811
Recommended for thin fabrics



[二合一]气动式下摆车缝 / 环型松紧带折缝附左切刀

气动式布料导边器能将布料及松紧带顺畅的卷折，此外左切刀切齐後再进行缝纫，可增加包缝工程之品质与效率，适用於男内裤、运动裤等裤头松紧带包缝。



[2 IN 1]

PNEUMATIC HEMMING / TUBULAR ELASTIC TAPE HEMMING WITH LEFT SIDE FABRIC TRIMMER

With pneumatic driving folder to fold fabric and insert elastic smoothly, left hand side fabric trimming before hemming increases sewing quality & efficiency. For hemming sleeve opening and bottom of underwears, T-shirts, or sportswears, etc...

规格

SPECIFICATIONS

C007LX - W122 - 240 /CH/DCLU

- ① 机种别 Model ④ 功能 Function ⑦ 针距 Needle gauge ⑨ 马达 Motor
 ② 系列 Series ⑤ 针板舌片 Needle Plate Finger ⑧ 配件 Device U: U Series
 ③ 网线方式 Covering Types ⑥ 针数 Needle Numbers H: H Series

| C007L/C007LX | | ⑤ | ⑥ | | ⑦ | | | | | ⑨ | S.P.M. (Max) | |
|--|-----------------------------------|-------|---|---|-------------|---------|---------|-----|-----|---|--------------|--------|
| | | | | | | | | | | | C007L | C007LX |
| 一般平缝 / 下摆车缝 General Seaming/ Bottom Hemming | C007L-W12 ⑤ -2 ⑦ /CH | 1,2 | 2 | 4 | 3.2/4.0/4.8 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 5500 | 4500 |
| | C007L-W12 ⑤ -3 ⑦ /CH | 1,2 | 3 | 5 | 4.8/5.6/6.4 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 5500 | 4500 |
| | C007L-U12 ⑤ -2 ⑦ /CH | 1,2 | 2 | 3 | 3.2/4.0/4.8 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 5500 | 4500 |
| | C007L-U12 ⑤ -3 ⑦ /CH | 1,2 | 3 | 4 | 4.8/5.6/6.4 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 5500 | 4500 |
| | C007L-W12 ⑤ -2 ⑦ /RH/RCH-3M | 1,2 | 2 | 4 | 4.0/4.8 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 5500 | 4500 |
| | C007L-W12 ⑤ -3 ⑦ /RH/RCH-3M | 1,2 | 3 | 5 | 5.6/6.4 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 5500 | 4500 |
| | C007L-U12 ⑤ -2 ⑦ /RH/RCH-3M | 1,2 | 2 | 3 | 4.0/4.8 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 5500 | 4500 |
| | C007L-U12 ⑤ -3 ⑦ /RH/RCH-3M | 1,2 | 3 | 4 | 5.6/6.4 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 5500 | 4500 |
| | C007L-W162-2 ⑦ /CH | 2 | 2 | 4 | 4.0/4.8 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 5500 | 4500 |
| | C007L-W162-3 ⑦ /CH | 2 | 3 | 5 | 5.6/6.4 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 5500 | 4500 |
| 选购配件 : UTP, UTQ, UTR, UTS, CLA, CMR, CAR/UTP, CAR/UTQ Optional Device: UTP, UTQ, UTR, UTS, CLA, CMR, CAR/UTP, CAR/UTQ | | | | | | | | | | | | |
| 拷克倒骨盖缝 Overlock-seam Covering Stitch | C007L-W322-3 ⑦ /CC | 2 | 3 | 5 | 5.6/6.4 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 5500 | 4500 |
| | C007L-U322-3 ⑦ /CC | 2 | 3 | 4 | 5.6/6.4 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 5500 | 4500 |
| | C007L-W322-3 ⑦ /CE | 2 | 3 | 5 | 5.6/6.4 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 5500 | 4500 |
| | C007L-U322-3 ⑦ /CE | 2 | 3 | 4 | 5.6/6.4 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 5500 | 4500 |
| 选购配件 : UTP, UTQ, UTR, UTS, CLA, CMR, CAR/UTP, CAR/UTQ Optional Device: UTP, UTQ, UTR, UTS, CLA, CMR, CAR/UTP, CAR/UTQ | | | | | | | | | | | | |
| 环型松紧带裤头接缝 Tubular Jacquard Elastic Waistband Attaching | C007L-W532-2 ⑦ /CR/UTP/CL/CX/RLP1 | 2 | 2 | 4 | 3.2/4.0/4.8 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| | C007L-W532-3 ⑦ /CR/UTP/CL/CX/RLP1 | 2 | 3 | 5 | 5.6/6.4 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| | C007L-U532-2 ⑦ /CR/UTP/CL/CX/RLP1 | 2 | 2 | 3 | 3.2/4.0/4.8 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| | C007L-U532-3 ⑦ /CR/UTP/CL/CX/RLP1 | 2 | 3 | 4 | 5.6/6.4 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| 左切刀下摆车缝 Bottom Hemming with Left Side Fabric Trimmer | C007L-W81 ⑤ -2 ⑦ /CRL | 1,2,3 | 2 | 4 | 4.0/4.8 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| | C007L-W81 ⑤ -3 ⑦ /CRL | 1,2,3 | 3 | 5 | 5.6/6.4 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| | C007L-U81 ⑤ -2 ⑦ /CRL | 1,2,3 | 2 | 3 | 4.0/4.8 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| | C007L-U81 ⑤ -3 ⑦ /CRL | 1,2,3 | 3 | 4 | 5.6/6.4 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| | C007L-W81 ⑤ A-2 ⑦ /CRL | 1,2,3 | 2 | 4 | 4.0/4.8 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| | C007L-W81 ⑤ A-3 ⑦ /CRL | 1,2,3 | 3 | 5 | 5.6/6.4 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| | C007L-U81 ⑤ A-2 ⑦ /CRL | 1,2,3 | 2 | 3 | 4.0/4.8 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| | C007L-U81 ⑤ A-3 ⑦ /CRL | 1,2,3 | 3 | 4 | 5.6/6.4 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| 选购配件 : UTP, UTQ, UTR, CMR, CAR/UTP, CAR/UTQ, CL/UTP Optional Device: UTP, UTQ, UTR, CMR, CAR/UTP, CAR/UTQ, CL/UTP | | | | | | | | | | | | |
| 松紧带上带边缝 附左切刀 Elastic Attaching with Left Side Fabric Trimmer | C007L-W82 ⑤ -2 ⑦ /CRL/CHP/CL/RL | 1,2,3 | 2 | 4 | 4.0/4.8 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| | C007L-W82 ⑤ -3 ⑦ /CRL/CHP/CL/RL | 1,2,3 | 3 | 5 | 5.6/6.4 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| | C007L-U82 ⑤ -2 ⑦ /CRL/CHP/CL/RL | 1,2,3 | 2 | 3 | 4.0/4.8 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| | C007L-U82 ⑤ -3 ⑦ /CRL/CHP/CL/RL | 1,2,3 | 3 | 4 | 5.6/6.4 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| | C007L-W82 ⑤ A-2 ⑦ /CRL/CHP/CL/RL | 1,2,3 | 2 | 4 | 4.0/4.8 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| | C007L-W82 ⑤ A-3 ⑦ /CRL/CHP/CL/RL | 1,2,3 | 3 | 5 | 5.6/6.4 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| | C007L-U82 ⑤ A-2 ⑦ /CRL/CHP/CL/RL | 1,2,3 | 2 | 4 | 4.0/4.8 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| | C007L-U82 ⑤ A-3 ⑦ /CRL/CHP/CL/RL | 1,2,3 | 3 | 5 | 5.6/6.4 | 1.4-3.6 | 0.9~1.4 | 5/7 | H/U | | 4500 | 4500 |
| 选购配件 : UTP, UTQ, CMR, CAR/UTQ, CL/UTP Optional Device: UTP, UTQ, CMR, CAR/UTQ, CL/UTP | | | | | | | | | | | | |