


# DT828

SIRUBA  
銀箭牌

Direct Drive Double Needle  
Lockstitch Machine

直驅雙針平縫車

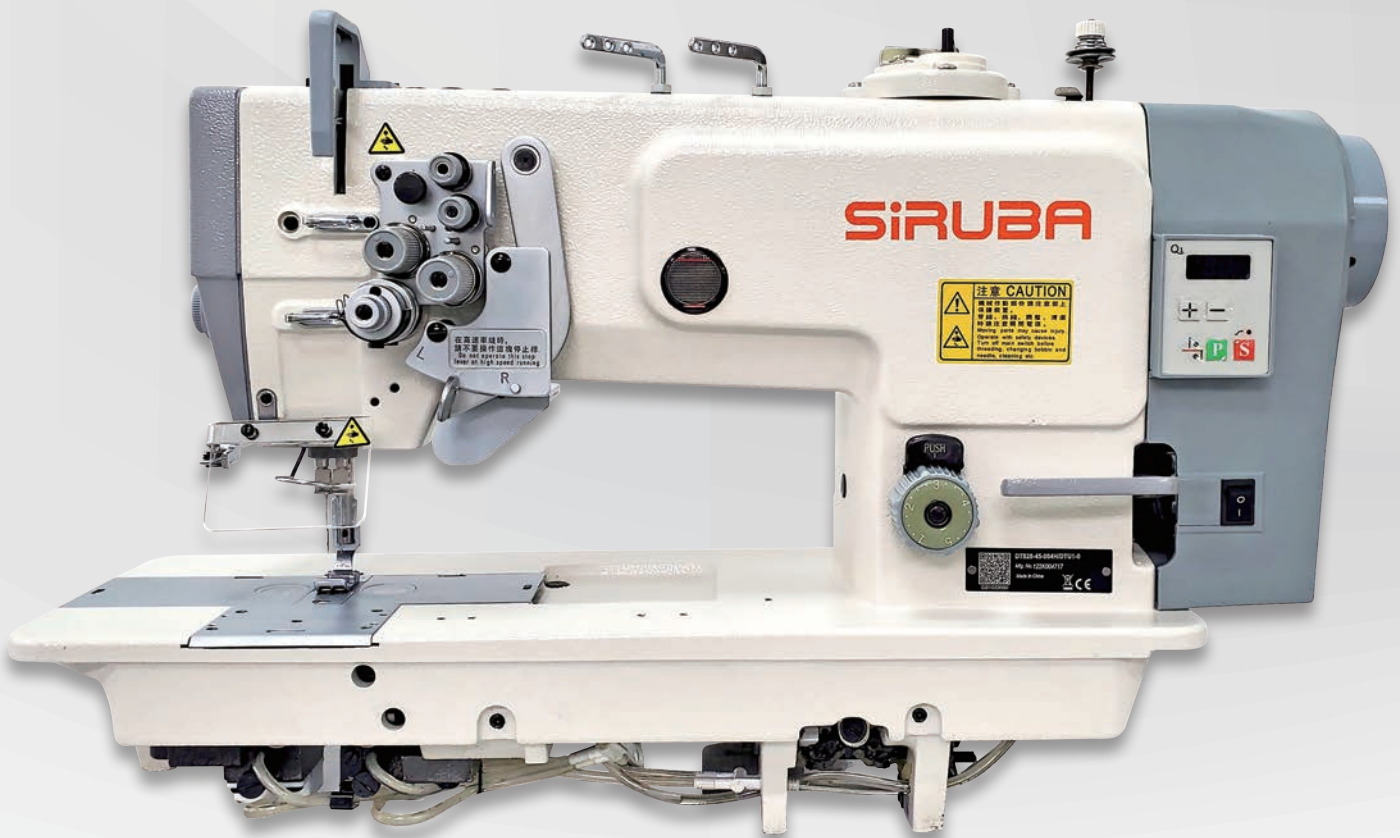

- 針送式送料，縫目準確，並可自由調整大小，縫目穩定美觀。
- 採用旋轉水平式旋梭，並附自動給油裝置。
- 附有檢視底線用的窗口，方便查看梭仔線的餘量。

- The design of needle feed mechanism moves with simple operation , excellent stitching and precise stitch-length.
- Adopting fully rotating horizontal axis hook , slide type thread take-up as well as automatically lubricating system.
- Convenient window for monitoring bobbin thread volume.

## 特點

## FEATURES

**1 機電一體化的完美整合：**  
內置電控箱及控制台，安裝簡易，使用方便。  
**Perfect mechatronic combination:**  
Built-in control box & panel, easy to install and operate.

**2 直驅伺服馬達：**  
反應快速，動作精準，比離合器馬達省電60%。  
**Direct drive servo motor:**  
Quick reaction, precise movement, 60% energy saving compared to clutch motor.


**3 倒縫撥桿裝置：**  
可以輕鬆實現倒縫縫紉。  
**Reverse lever:**  
Easy to achieve reverse.

**4 縫距控制鈕：**  
轉動調整達到理想縫距。  
**Stitch length control button:**  
Rotate to get ideal stitch length.




**5 簡易式操作面板裝置：**  
操作內容直觀，簡單方便。  
**Simple control panel:**  
User friendly, easy to operate.

**6 邊角縫裝置：**  
從縫紉角度和針數決定距寬，來做到美麗之邊縫。  
**Split stitching device:**  
Decide the ideal width by sewing angle and stitches numbers, it will make good quality of split stitching.

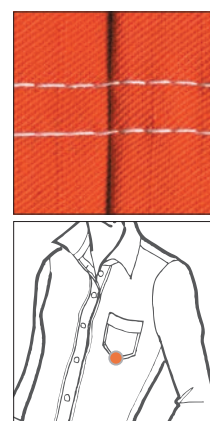

一般平縫  
General plain seaming

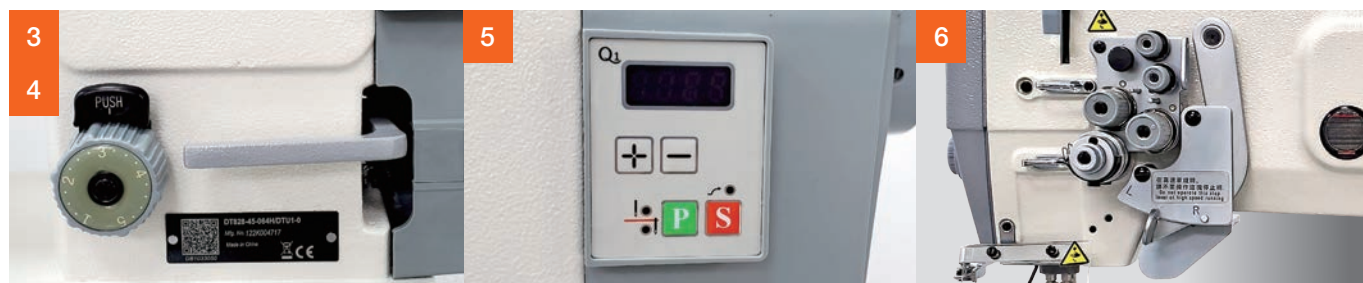

## 規格

## SPECIFICATIONS

DT828		 Needle No. DP×5	布料厚度 Fabric Weight			 mm 手動 Hand	 mm	 S.P.M. (Max)	 mm	 KG
			L	M	H					
42	4.8 6.4	#14 - #22				7	M : 0~4 H : 0~5	3600	L730 W315 H670	49 / 52
45								3000		
72							M : 0~7 H : 0~7			
75										

功能 Function	規格Sub-Class	針送 Needle Feed	標準旋梭 Standard Hook	大旋梭 Big Hook	角縫 Split Needle Bar
	42	V	V	-	-
	45	V	V	-	V
	72	V	-	V	-
	75	V	-	V	V



高林股份有限公司  
KAULIN MFG. CO., LTD.

由於對產品的改良及更新，本產品型錄中之產品規格及外觀的修改恕不事先通知！  
The specification and/or appearances of the equipment described in this catalogue are subject to change without previous notice because of modification.

C.S2023-15. APR. 2024