

DT828L

SIRUBA
銀箭牌

Computerized Double Needle Lockstitch
Machine With Double Stepping Motor


双步进双针电脑平缝车



You Tube



YOUKU

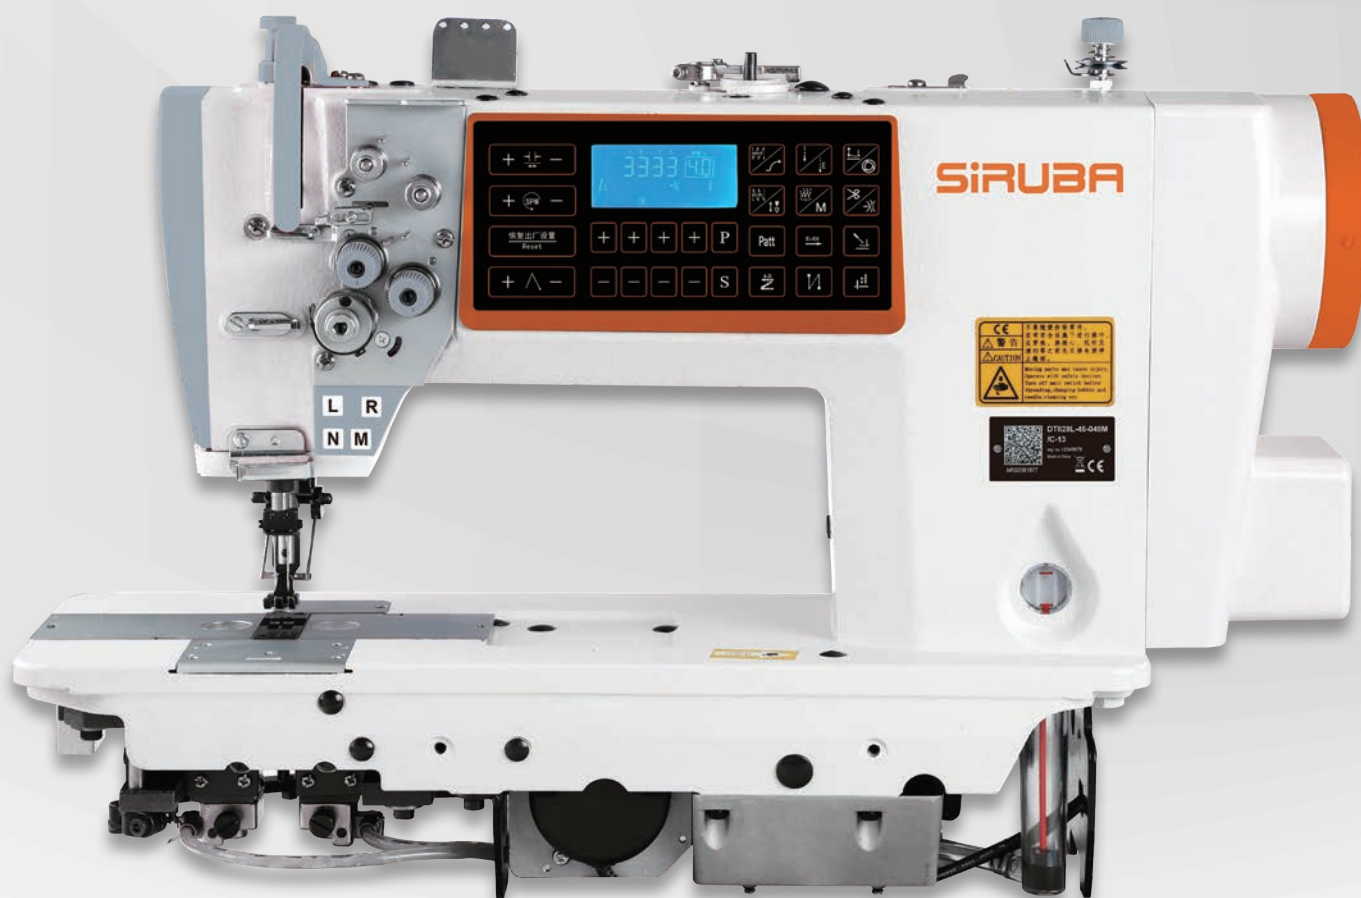

- 上轴采用通轴设计，整体力矩轻，机器运转平稳，送料流畅。
- 本机采用750W大功率伺服电机直接驱动，噪音低、振动小，安装方便，启动停车反应迅速，机针贯穿力强。
- 双步进驱动技术，实现缝、加固、剪线和抬压脚无声。
- 密封式油箱设计，清洁无污染。
- 电子膝控装置，抬压脚轻盈省力，降低劳动强度。
- LED照明灯亮度三档可调。
- 多键位操作面板，操作内容直观，简单方便。
- 一体式背挂式电控，安装方便。
- The upper shaft adopts the through-all design; the overall torque is light; the machine runs smoothly; and the feeding is smooth.
- 750W high-power servo motor: larger needle penetration force, lower noisy, lower vibration, easier to install and shorter responding time.
- Stepping motor with bidirectional driven technique: powerful, stable as well as quiet when end back-tacking, reinforced stitching, trimming, and presser foot lifting.
- The sealed lubricate design: avoid fabrics from grease effectively.
- Electronic knee control pad makes the foot lifter light and easy to operate.
- 3-level LED light.
- Multi-functional panel: intuitive and user-friendly.
- Integrated back-mounted control box; easy to install.



KAULIN


特点

FEATURES



多功能按键设置：
可以轻松实现转角、
倒缝、密缝、补针等
缝纫。

The multifunctional
buttons:
easy to achieve angle
change, reverse stitch,
seam stitch and stitch
compensation.



高品质的加固缝
线迹：
采用步进马达控
制的送料机构，
精准控制送料行
程，任何针距下
都可以实现线迹
重合的加固缝。

High-quality reinforcement stitches:
Step motor can accurately control
the feeding, making reinforcement
available for any stitch length.

电子膝控：
不改变工人
的操作习惯
实现轻松抬
压脚。




Electronic knee pad:
Without worker changing oper-
ating habits, presser foot can be
easily lifted.

- 步进马达双向驱动技术 (专利技术)：**
一个马达完成切线和抬压脚动作。
可靠的切线机构：
切线机构采用步进马达驱动，结构简
单、切线稳定、方便维护。
**Stepping motor bidirectional driven
technology (patent)：**
One step motor control trimming and
pressing foot lifter work.
The unique thread trimmer device:
Adopt step motor to drive, stable, light
noise and convenience on
maintenance.

- 直刀剪线结构：**
直刀剪线机构，剪线稳定。
Straight knife system：
Straight knife thread trimming mechanism, stable thread trimming.

- 密封油盘设计：**
缝料清洁无污染。
The sealed lubricate design：
Effectively avoid the material dirty from oil.

- 多功能键操作面板：**
操作盒按键内容直接，操作简便迅速。
Multi-function key operation panel:
The operation box has direct key content, and the operation is simple and rapid.

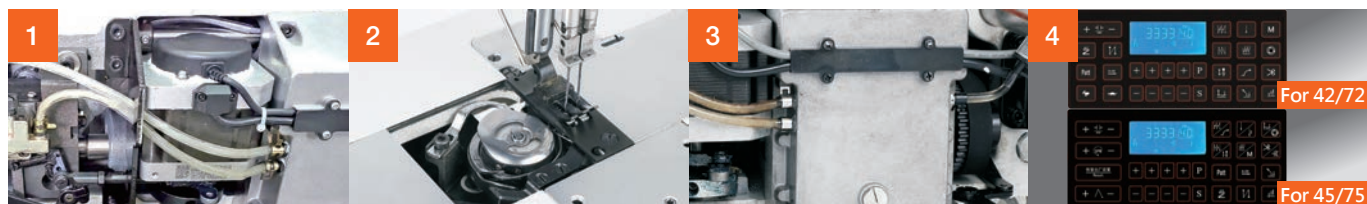

规格

SPECIFICATIONS

DT828L		 DP×5	布料厚度 Fabric Weight			 mm			 S.P.M. (Max)		
			L	M	H	手动 Hand	自动 Auto				
42	3.2 4.8 6.4	#11 - #16				7	8-12	M : 0~4 H : 0~5	3000	L680 W290 H640	55 / 62
45											
72		#14 - #22									
75											

功能 Function	规格Sub-Class	针送 Needle Feed	标准旋梭 Standard Hook	大旋梭 Big Hook	倒缝 Reverse Feeding	角缝 Split Needle Bar
	42	V	V	-	V	-
	45	V	V	-	V	V
	72	V	-	V	V	-
	75	V	-	V	V	V



高林股份有限公司
KAULIN MFG. CO., LTD.

由於对产品的改良及更新，本产品型录中之产品规格及外观的修改恕不事先通知！
The specification and/or appearances of the equipment described in this catalogue
are subject to change without previous notice because of modification.

C.S2023-14. AUG. 2023