

SIRUBA

銀箭牌



You Tube



YOUKU



U007 | SERIES

直驅超小筒型繙縫機

Ultra Small Cylinder Bed
Interlock Sewing Machine

特點

FEATURES



自動切線系列新設計氣/電動上下切刀組，出刀迅速穩定精準，切線俐落，輕順低噪音調整容易

Auto trimmer with newly designed pneumatic / electric trimming system, trims precisely and stably, reduce sound and easy to adjust.



圓形粗細針縫距調整鈕的設計，隨心所欲精確調整縫距長短

Circular stitch length adjustment button, easily to adjust stitch length.



128mm角逐業界最細的小筒設計，過往縫製困難的童裝袖口也可輕易車縫

128mm top-class small cylinder bed design. Conventionally difficult-to-sew small diameter tubular parts of children's clothing can be easily operated.



斜面筒嘴設計，縫製衣物著脫容易；筒身長69.7mm，方便長袖衣物套入車縫

Sharp entrance design allows quick placement/removal of material. 69.7mm cylinder length makes sewing long sleeve cuffs easily.

U007 可前後獨立調整差動結構

U007 INDEPENDENTLY ADJUSTABLE DIFFERENTIAL FEED DOG MECHANISM

穩定送布、適用多種布料面。


Stable material feeding, suitable for various fabric materials.



送布牙下送具，有別於皮帶傳送方式，送布力更佳、更耐用


Feed-dog design, more durable and great performance of fabric-feeding.

		送布力 FEED SYSTEM	耐用性 DURABILITY	使用效率 RESULT
U007		有下送具，送布力大 Strong feeding force with the bottom feed mechanism	送具 (金屬) Feed-dog (metal) More durable	速度快 Greater and higher efficiency
OTHER BRAND		上送具配下皮帶 Belt top feed mechanism	皮帶消耗品 Belt (Rubber) Less durable	皮帶會捲布，斷了更換耗時 The chance of belt breakage, time-consuming maintenance

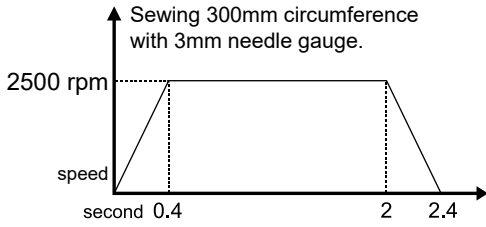

300mm圓周長不需3秒即可完工，2500rpm是對應小筒車縫的完美速度

Just take less than 3 seconds to complete 300mm circumference sewing; 2500rpm is the perfect speed for ultra small cylinder.

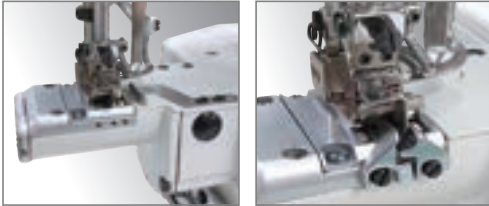

UCH-3M [三合一] 一般平縫 / 下擺車縫 / 倒骨蓋縫

三合一 平縫，倒骨，折下擺，更換作業組裝方便，多樣化功能，提供生產廠商高效率低成本。

UCH-3M [3 in 1] : GENERAL SEAMING/BOTTOM HEMMING/SEAM COVERING (Fold-down type)

3-in-1 model for multifunctional and efficient production with lower cost.

規格

SPECIFICATIONS

① ③ ④ ⑤ ⑥ ⑦ ⑧ * ⑨

U007 - W122 - 2 40/ UCH-3M/ UTT(UTU)/ DUKH

- ① 機種別
Model
- ② 系列
Series
- ③ 網線方式
Covering Types
- ④ 功能
Function
- ⑤ 針板舌片
Needle Plate Finger
- ⑥ 針數
Needle Numbers
- ⑦ 針距
Needle gauge
- ⑧ 配件
Device
- ⑨ 馬達 Motor H : H Series

U007	⑥	⑦	⑦	⑦	⑦	⑨	S.P.M. (Max)
U007-W122-2⑦/UCH-3M	2	4	4.0/ 4.8	1.4 ~ 3	5	H	2500
U007-W122-3⑦/UCH-3M	3	5	5.6/ 6.4	1.4 ~ 3	5	H	2500
U007-W122-2⑦/UCH-3M/UTT*	2	4	4.0/ 4.8	1.4 ~ 3	5	H	2500
U007-W122-3⑦/UCH-3M/UTT*	3	5	5.6/ 6.4	1.4 ~ 3	5	H	2500
U007-W122-2⑦/UCH-3M/UTU*	2	4	4.0/ 4.8	1.4 ~ 3	5	H	2500
U007-W122-3⑦/UCH-3M/UTU*	3	5	5.6/ 6.4	1.4 ~ 3	5	H	2500
U007-W122-2⑦/UCH-3M/UTX*	2	4	4.0/ 4.8	1.4 ~ 3	5	H	2500
U007-W122-3⑦/UCH-3M/UTX*	3	5	5.6/ 6.4	1.4 ~ 3	5	H	2500
U007-W122-2⑦/UCH-3M/UTY*	2	4	4.0/ 4.8	1.4 ~ 3	5	H	2500
U007-W122-3⑦/UCH-3M/UTY*	3	5	5.6/ 6.4	1.4 ~ 3	5	H	2500