


SIRUBA


輔助件

AUXILIARY PARTS


■ 700KST

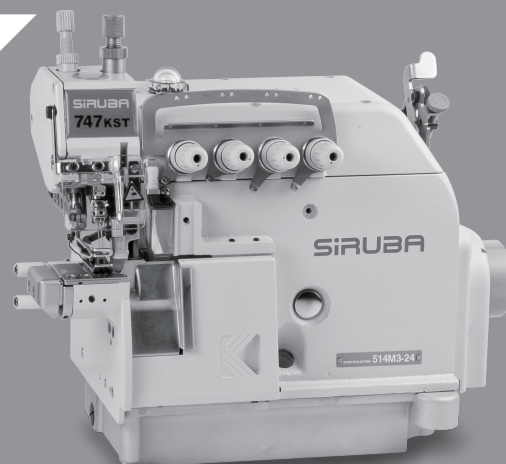


SIRUBA PARTS LIST	Series	Parts Group	Subclass / Remark	Page
	700KS/700KST	RLK1		1/1
				Date
				2013/12/12

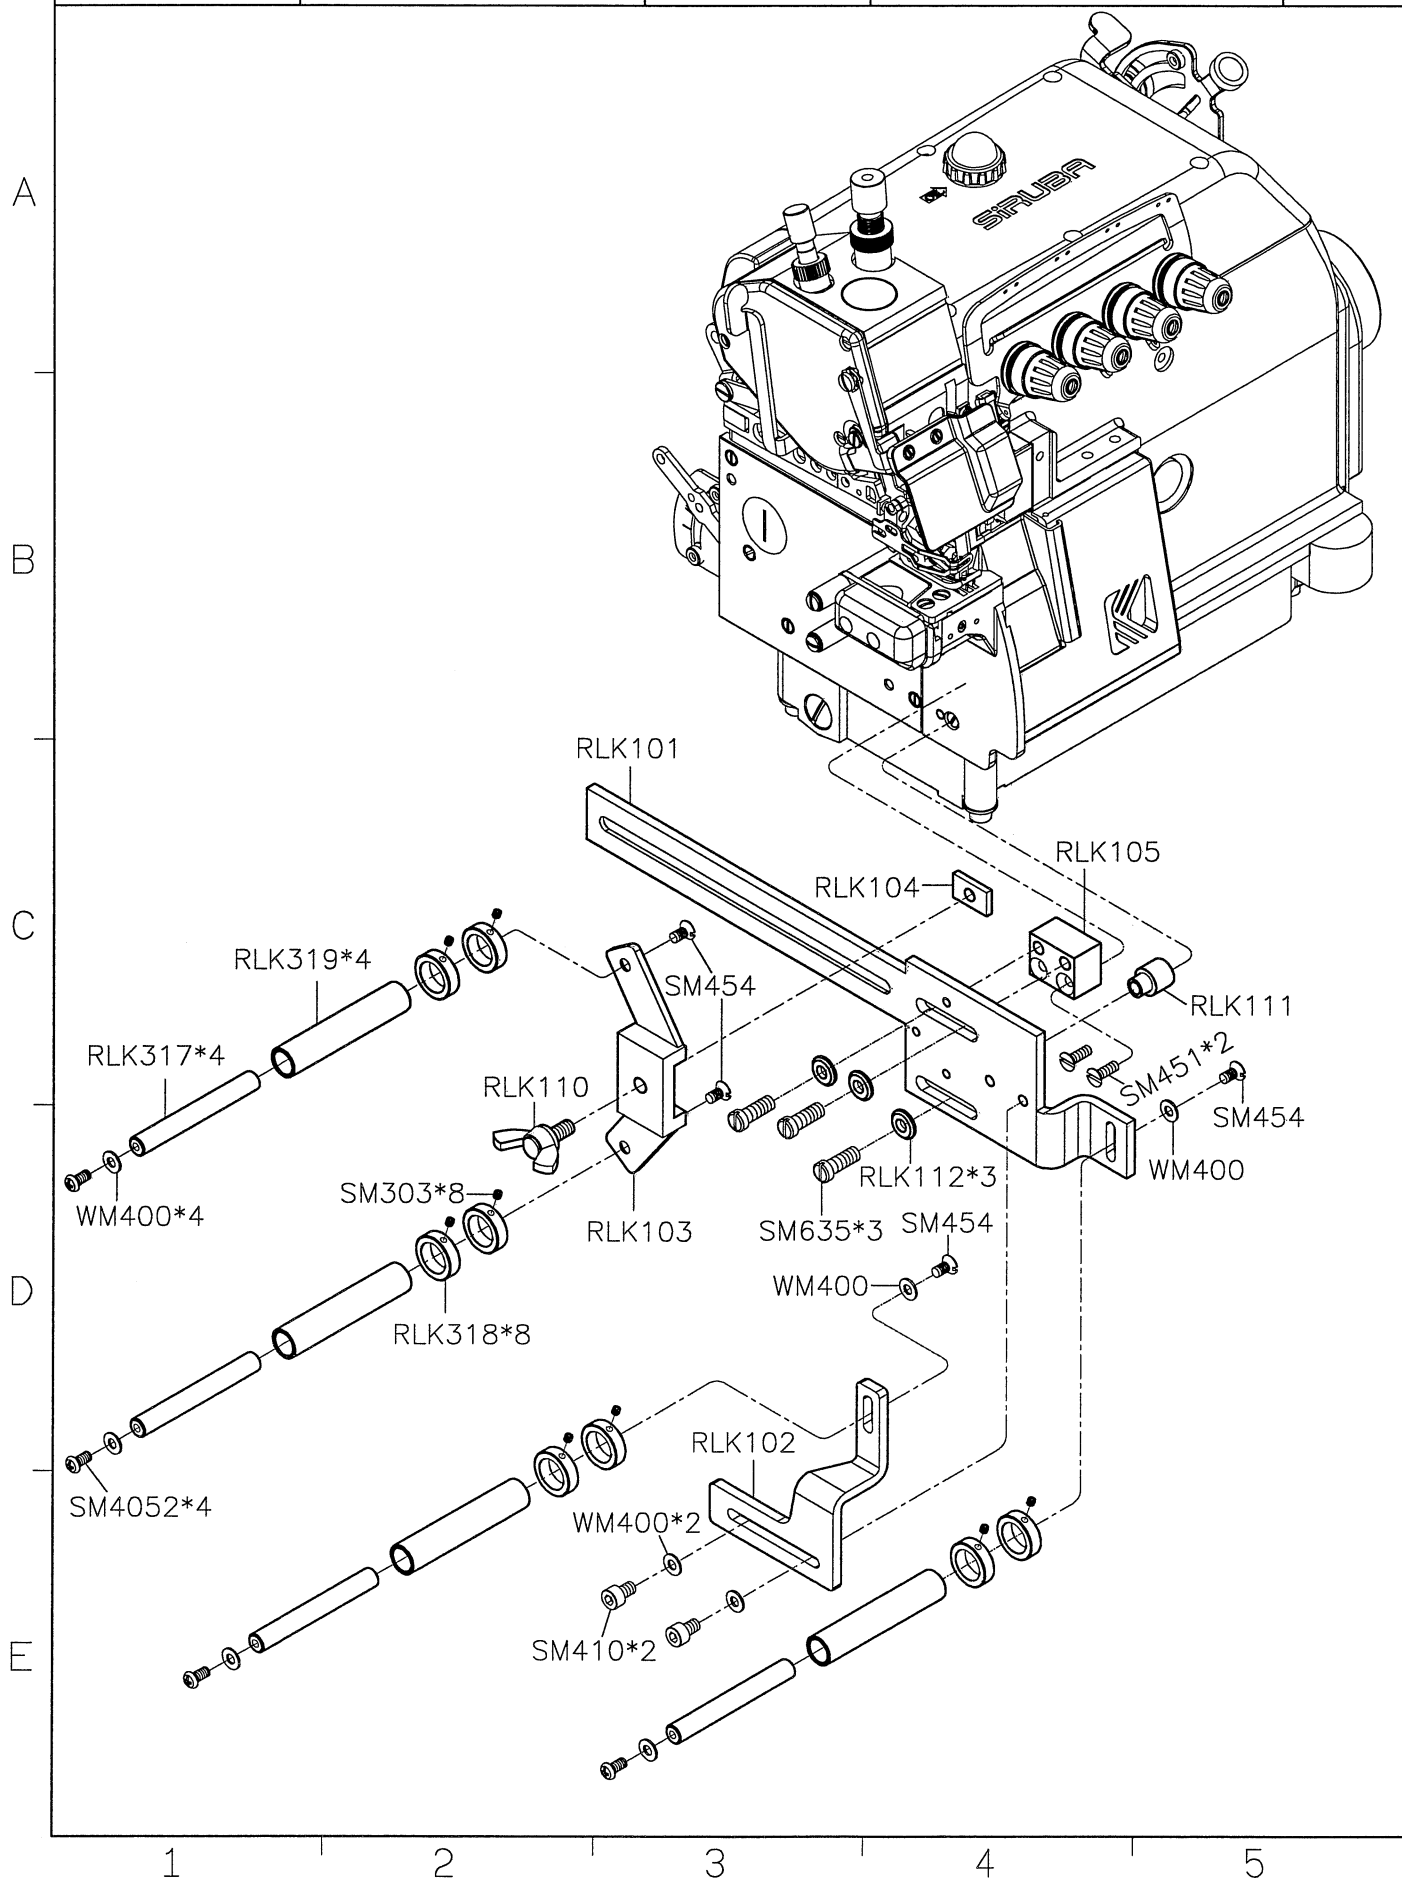

SIRUBA PARTS LIST	Series	Parts Group	Subclass / Remark	Page
	700KS/700KST	RLK2		1/1
				Date
				2016/03/02

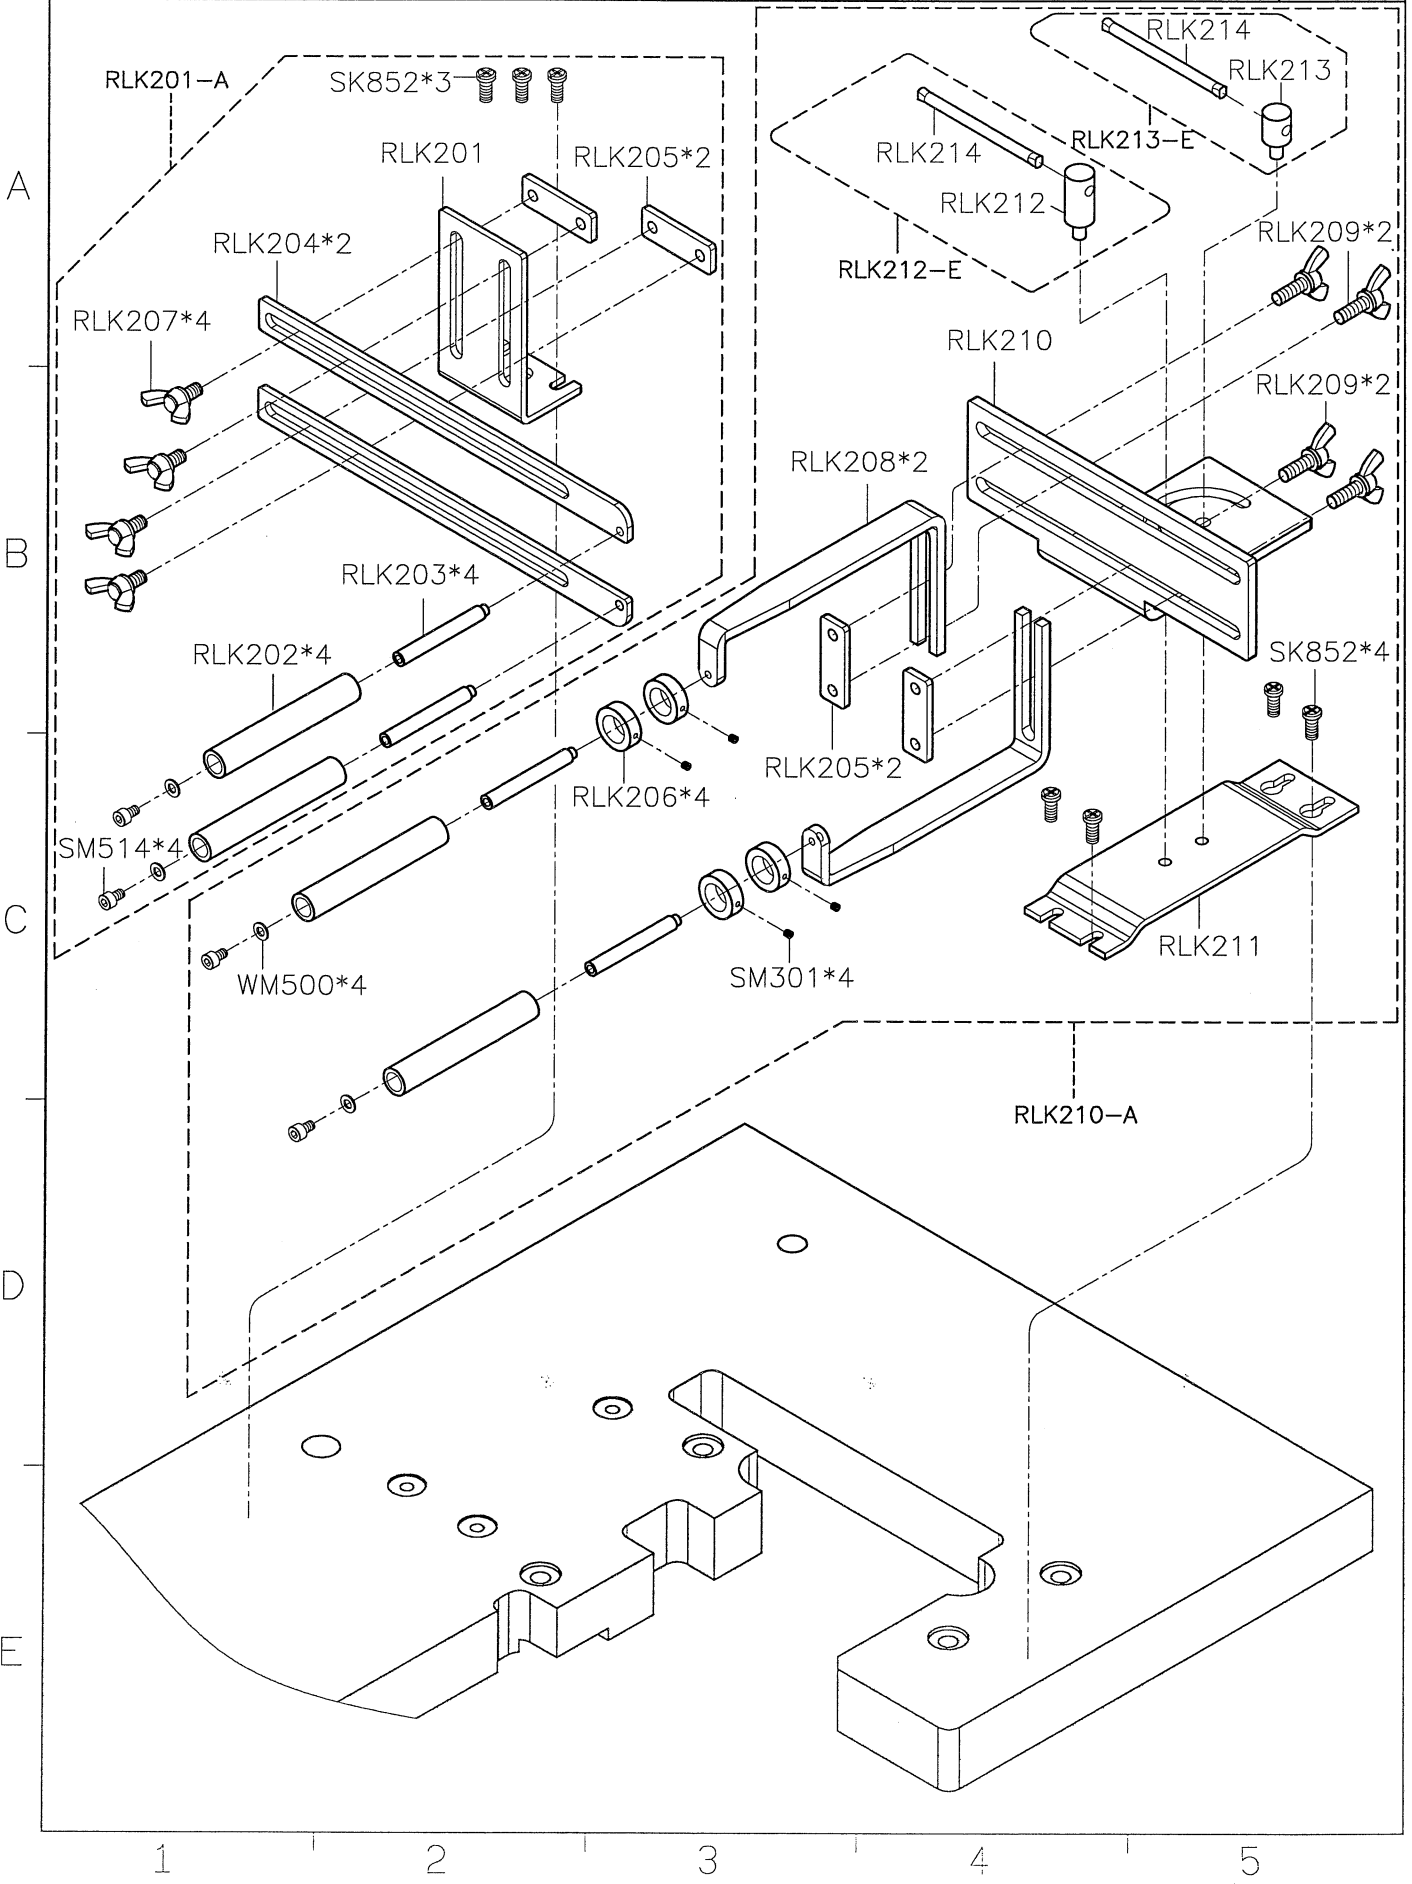

SiRUBA PARTS LIST	Series	Parts Group	Subclass / Remark	Page
	700KS/700KST	RLK3		1/1
				Date
				2016/03/02

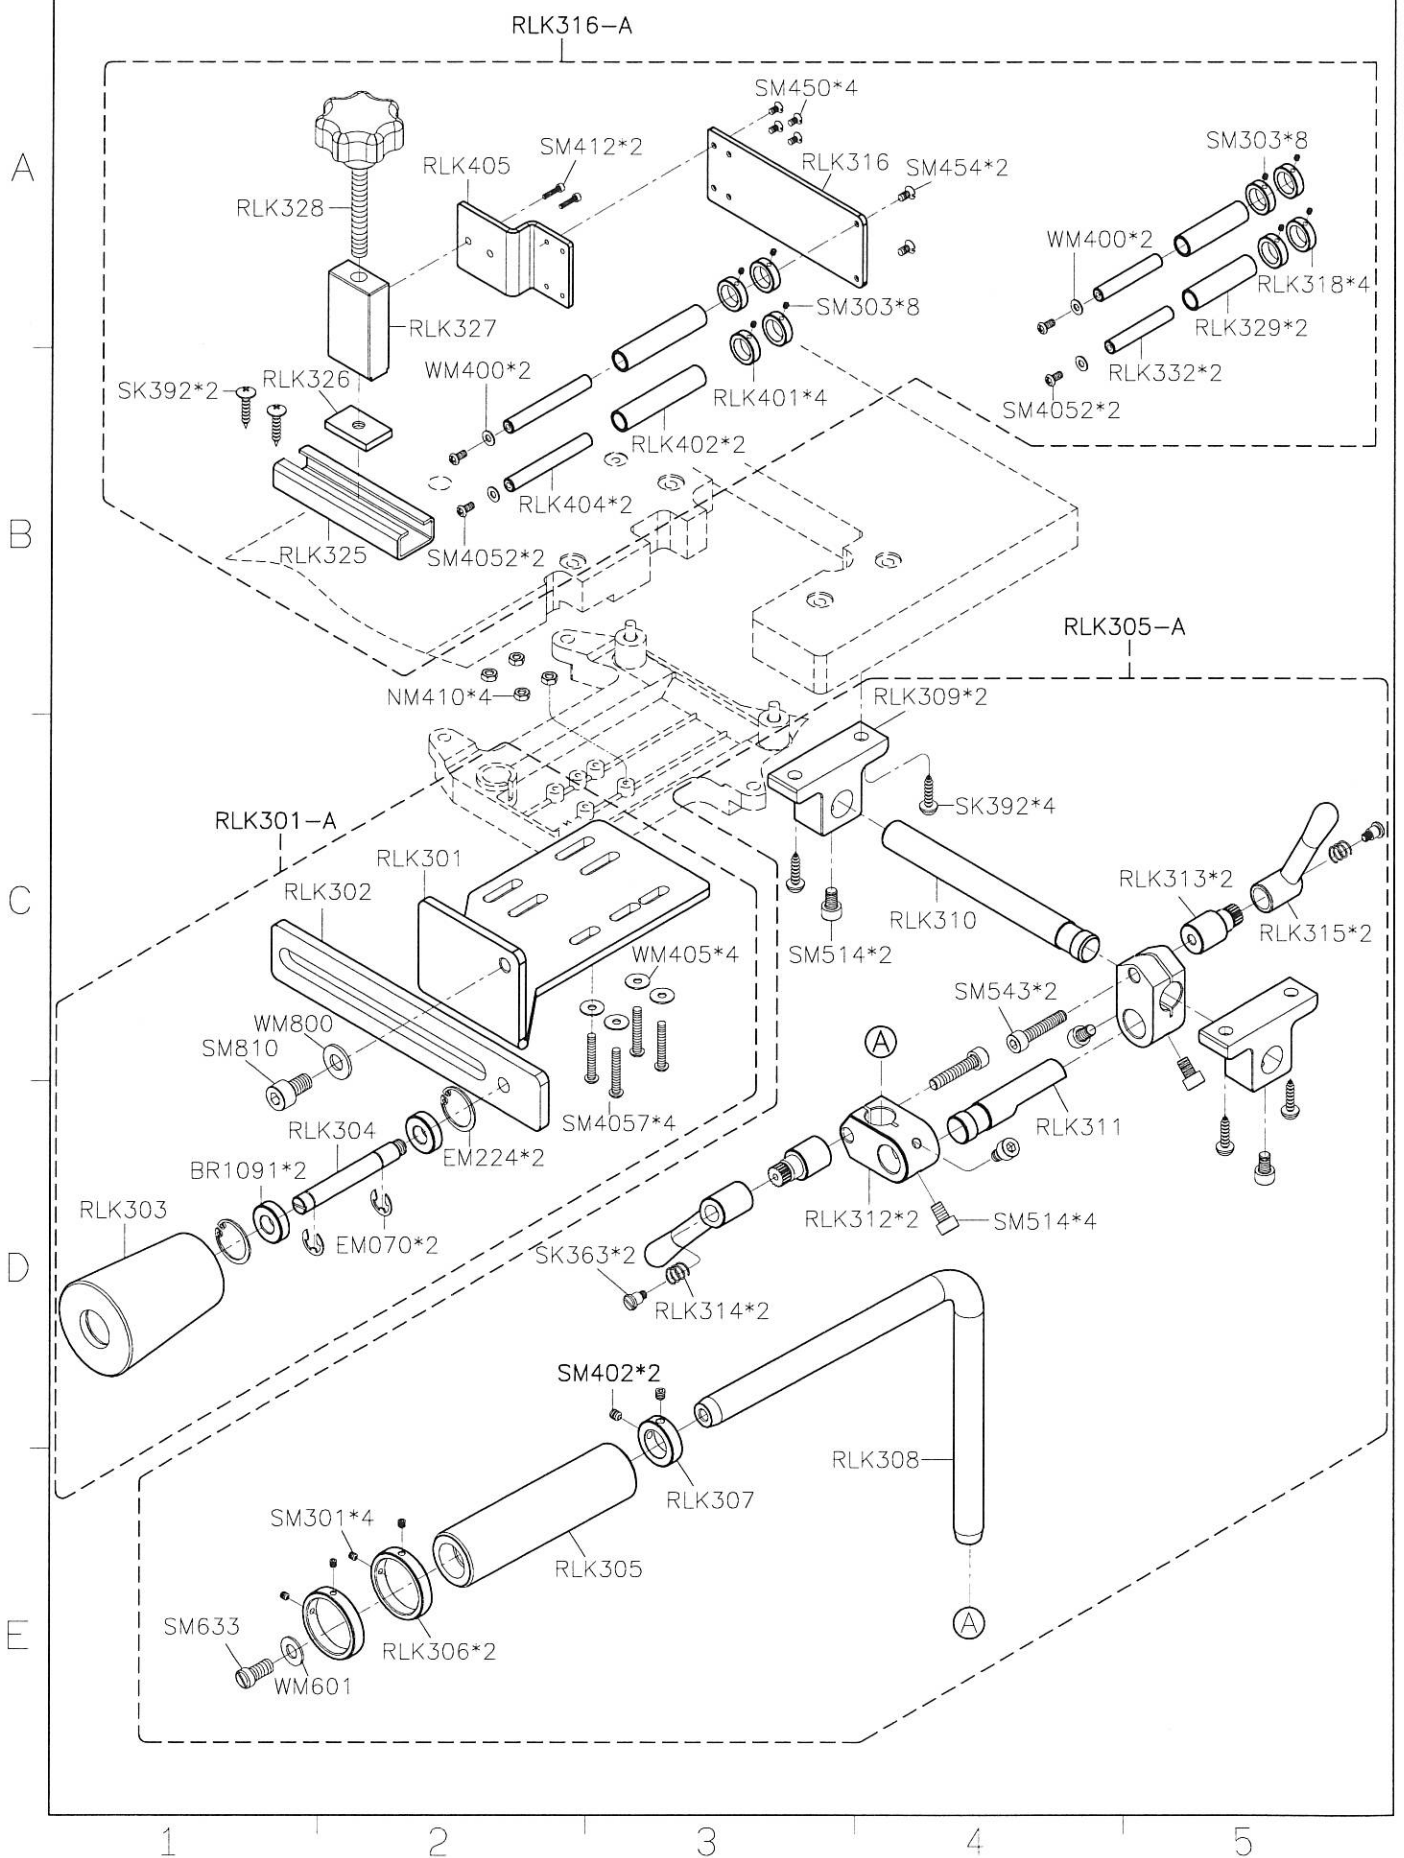

SIRUBA PARTS LIST	Series	Parts Group	Subclass / Remark	Page
	700KS/700KST	RLK3P		1/1
				Date
				2015/07/17


A

B


C

D


E

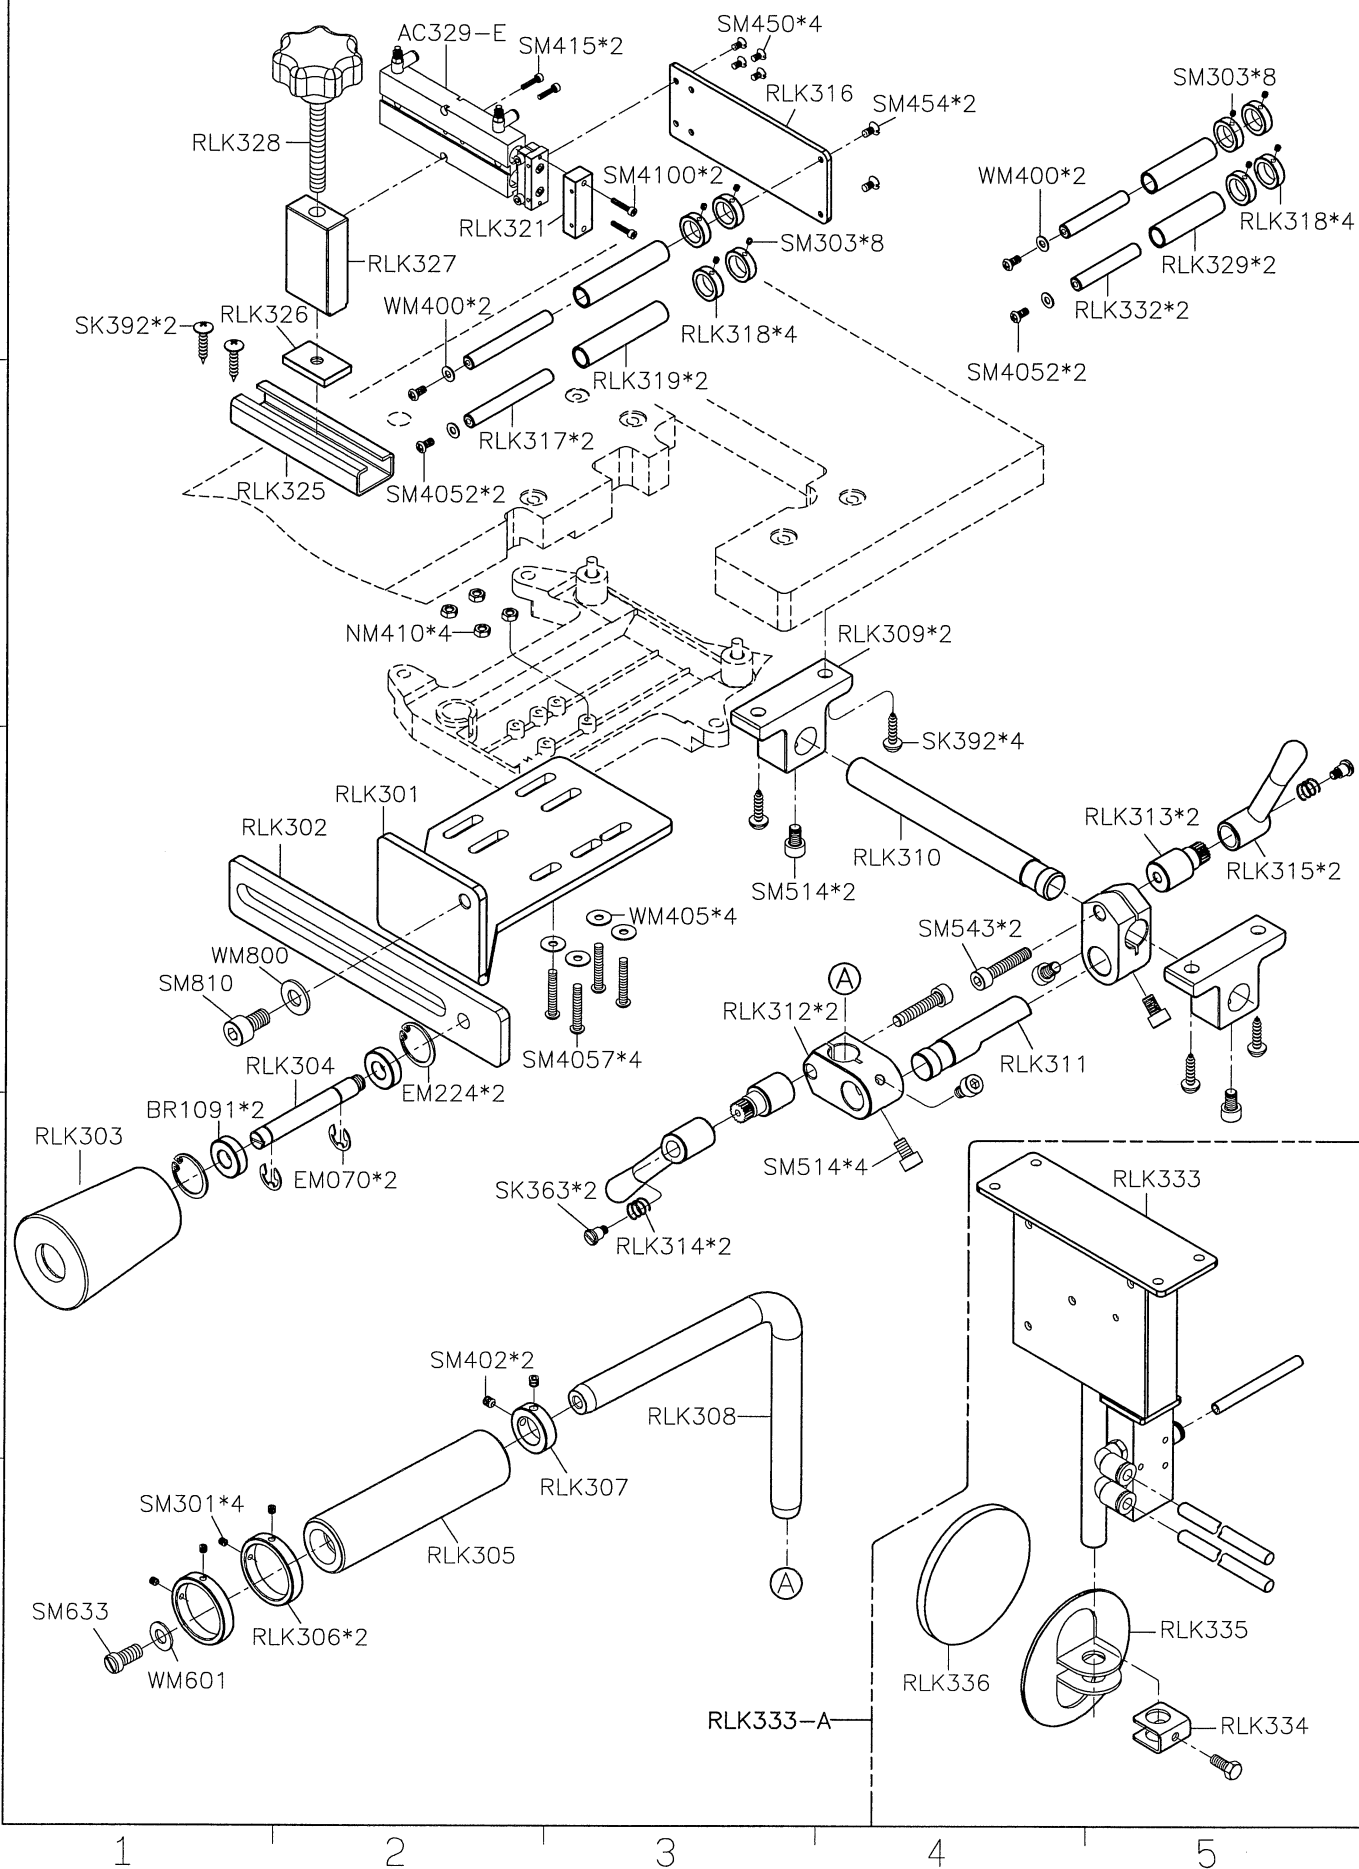

SiRUBA PARTS LIST	Series	Parts Group	Subclass / Remark	Page
	700KST	RSK		1/5
				Date
				2024/03/13

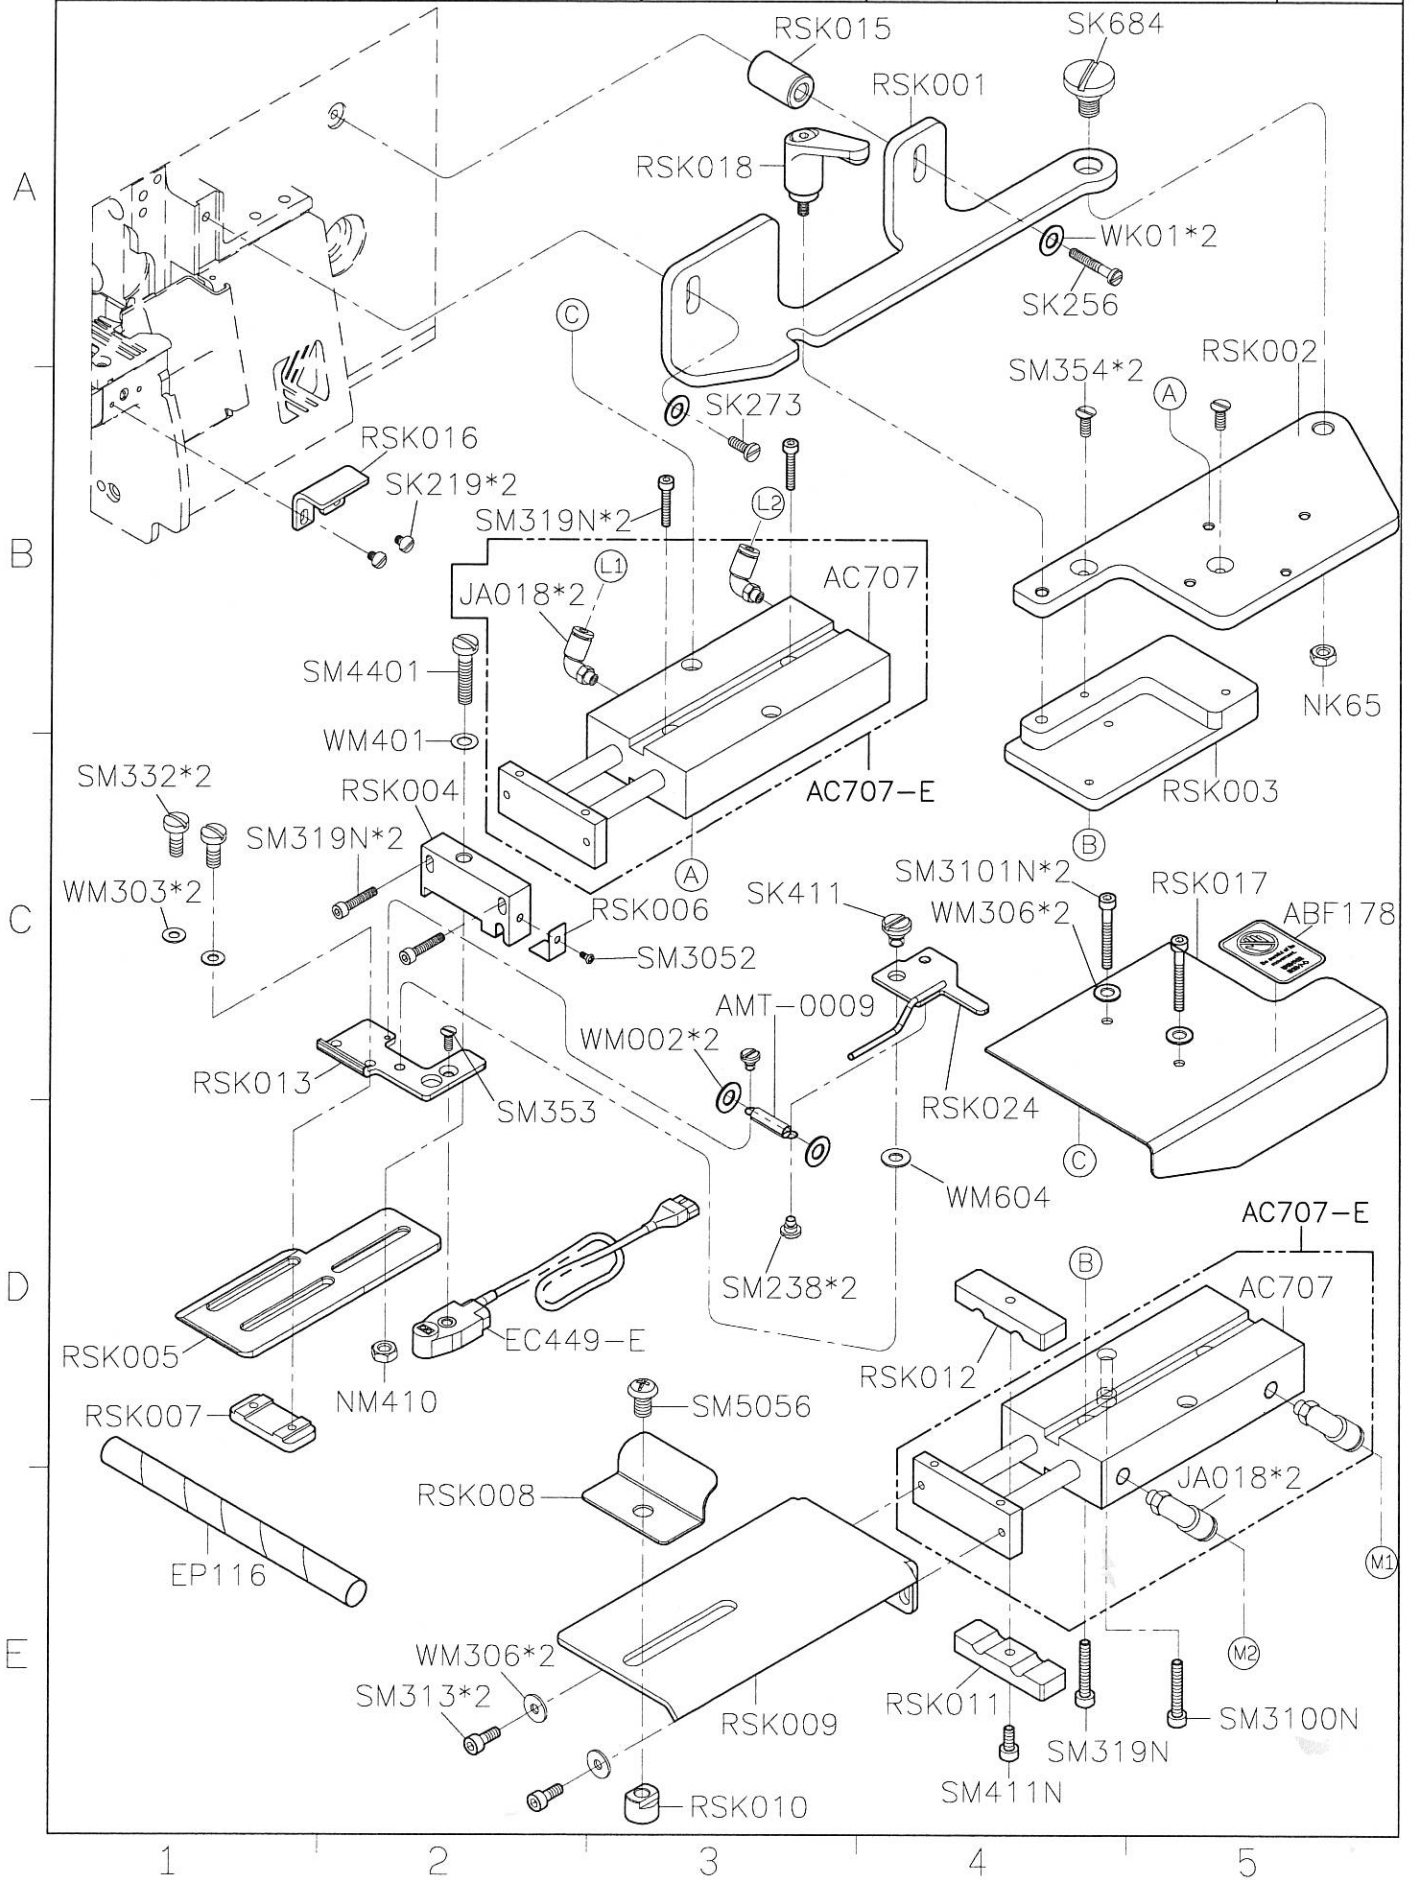

SIRUBA PARTS LIST	Series	Parts Group	Subclass / Remark	Page
	700KST	RSK	□歐.巴雙規	2/5
				Date
				2026/08/07

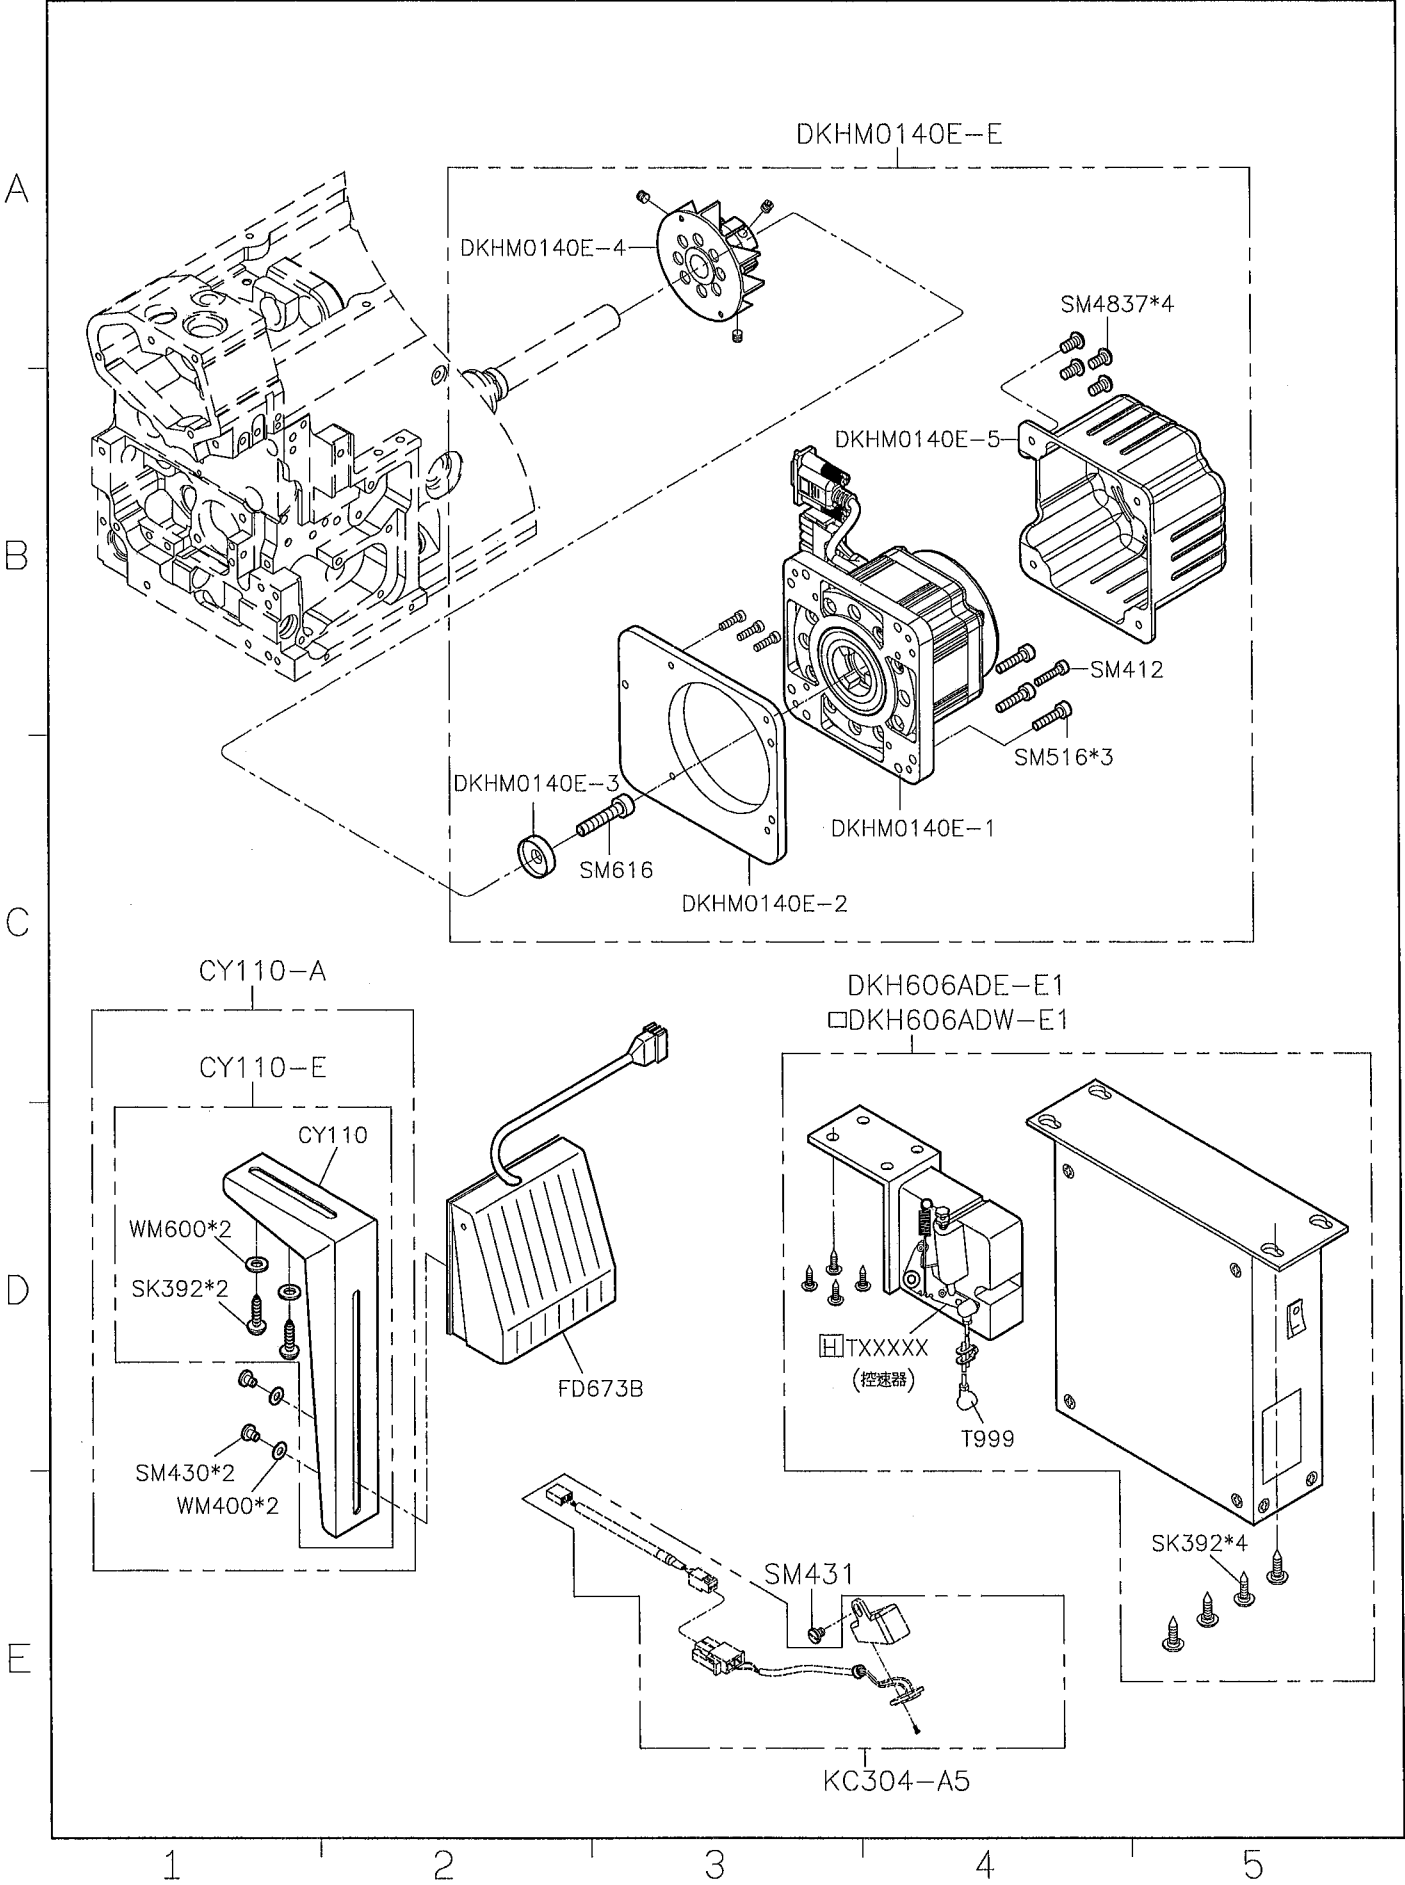

SIRUBA PARTS LIST	Series	Parts Group	Subclass / Remark	Page
	700KST	RSK		3/5
				Date
				2017.10.20


A

B

C

D


E

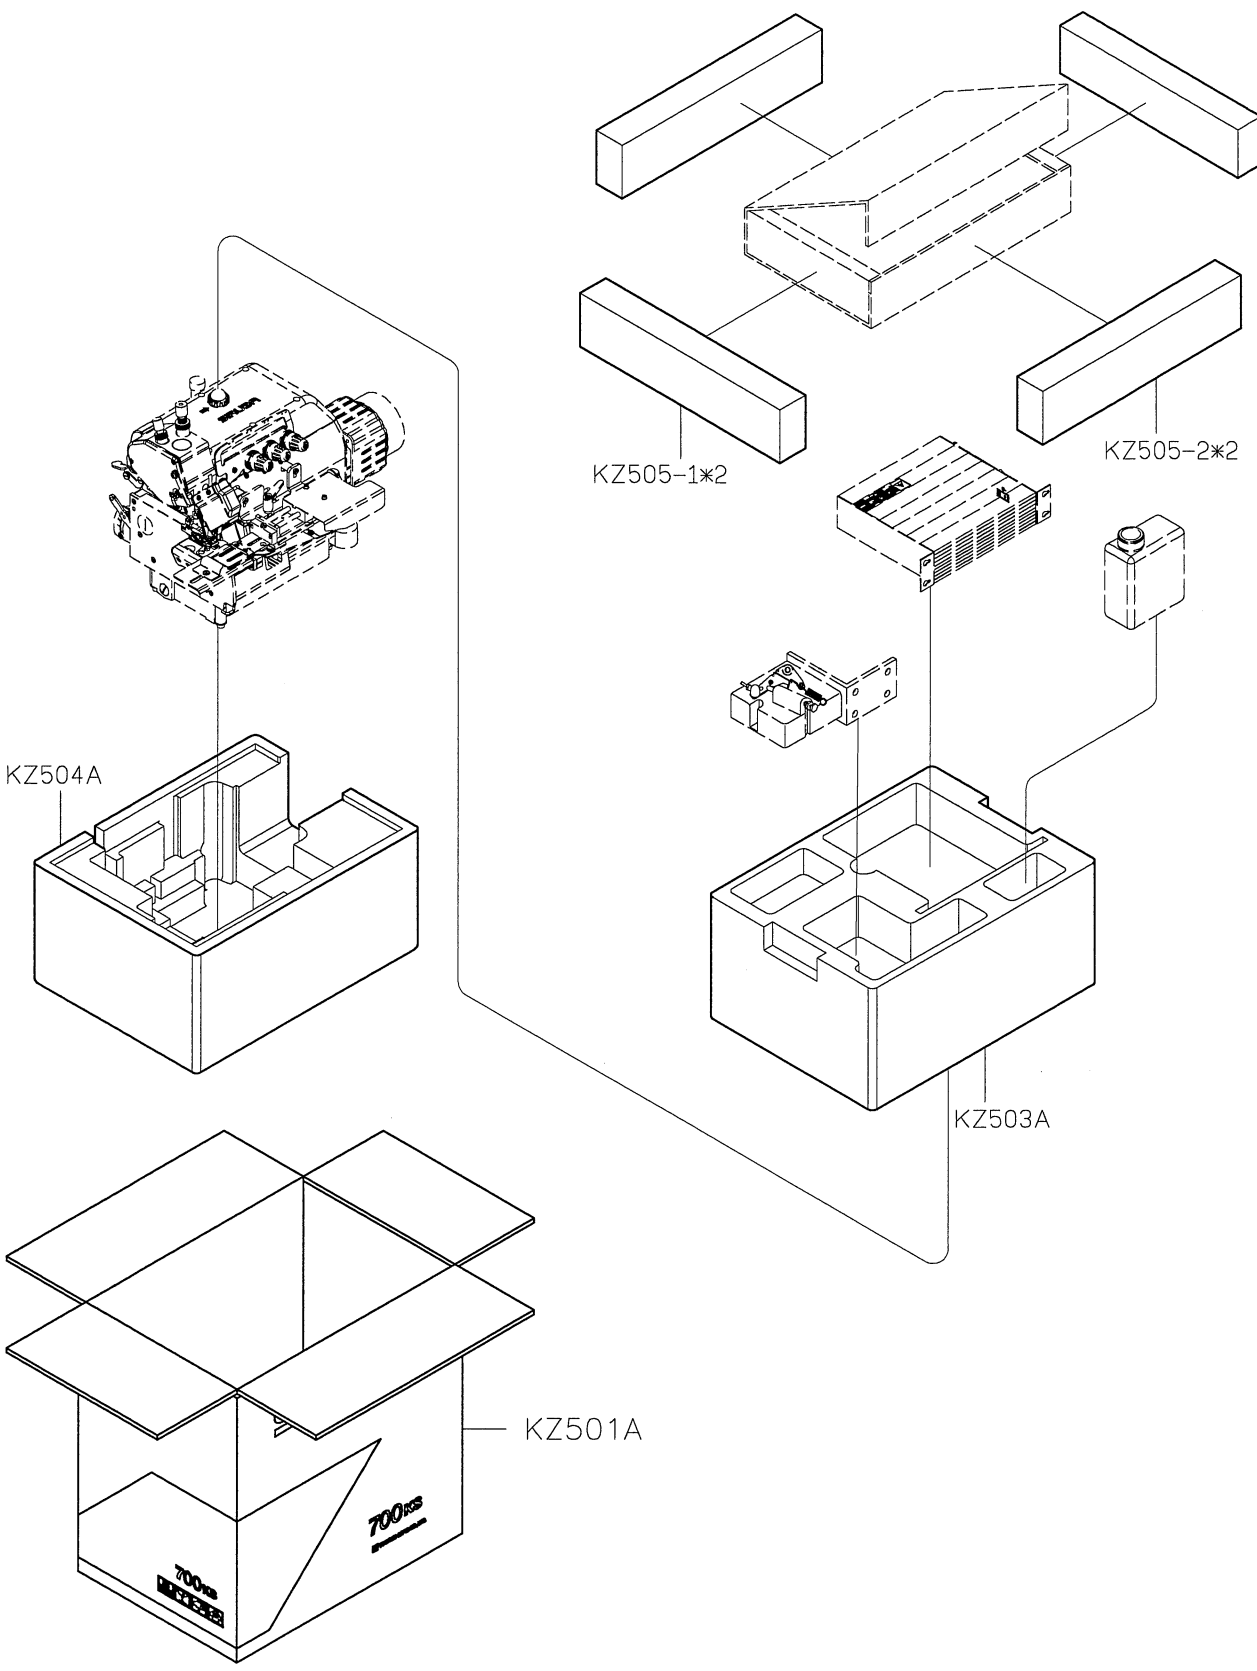


SiRUBA PARTS LIST	Series	Parts Group	Subclass / Remark	Page
	700KST	RSK	Note 註記: 1) ★ Before installation, please check one side is Air IN, another side is Air OUT. 2) 空氣有效使用壓力 Effective air pressure: 4~6 kg/cm 3) 請適度修剪管子長度，以達到風力最佳效能。	4/5
				Date
				2024/03/13

TUA-41ST


B-600

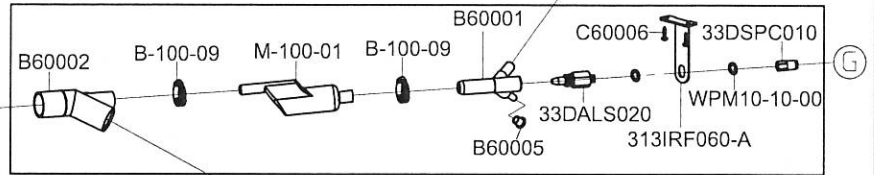

C-100-L

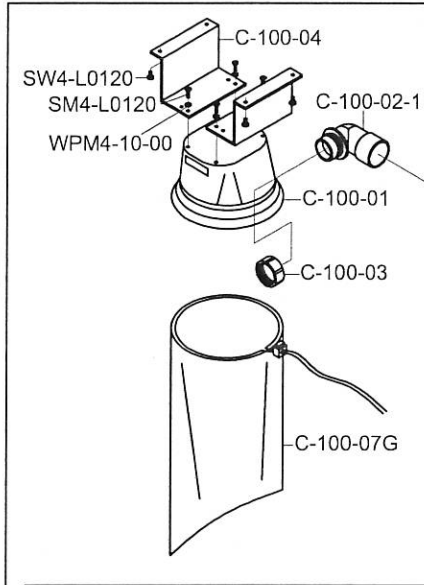


K-300-SK

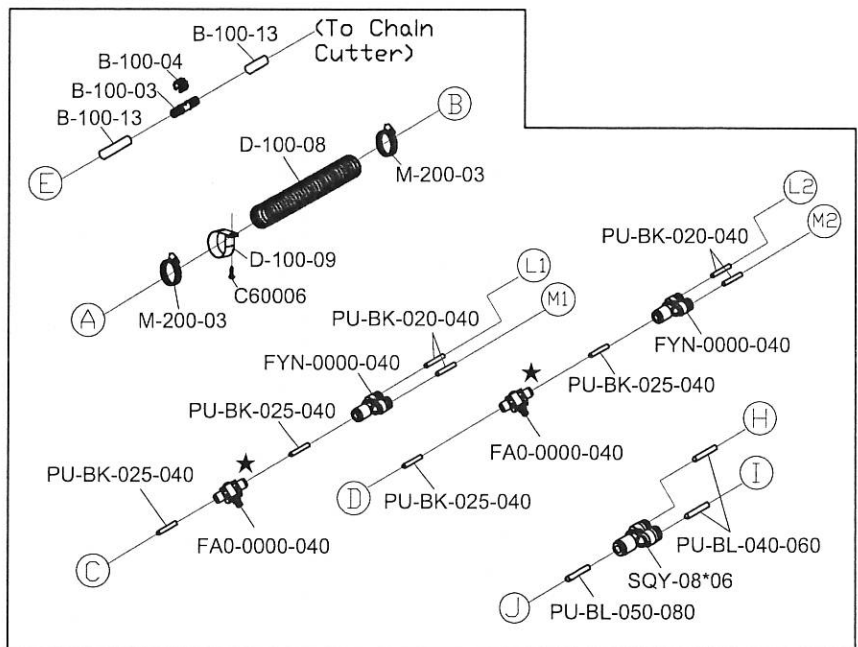


PU-BL-040-060


F-100-T

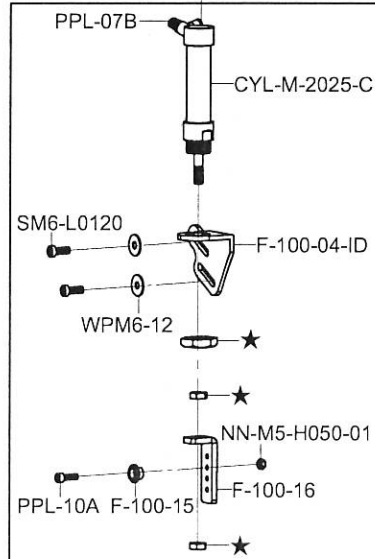


MAFR200L-8S

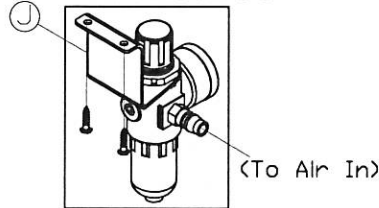


SV5101-D2KM3-7

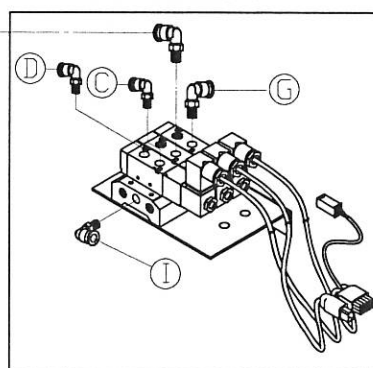


D-600-SR

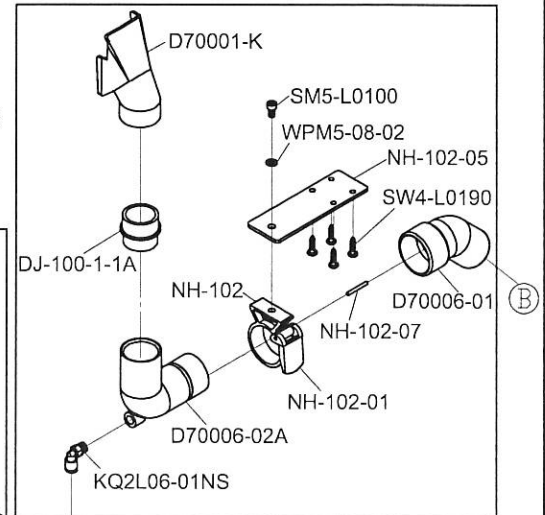


SIRUBA PARTS LIST	Series	Parts Group	Subclass / Remark	Page
	700KS 700KST	TUA-37S	Note 註記: 1) ★ Before installation, please check one side is Air IN, another side is Air OUT. 2) 空氣有效使用壓力 Effective air pressure: 4~6 kg/cm 3) 請適度修剪管子長度，以達到風力最佳效能。	1/1
				Date
				2016/11/02

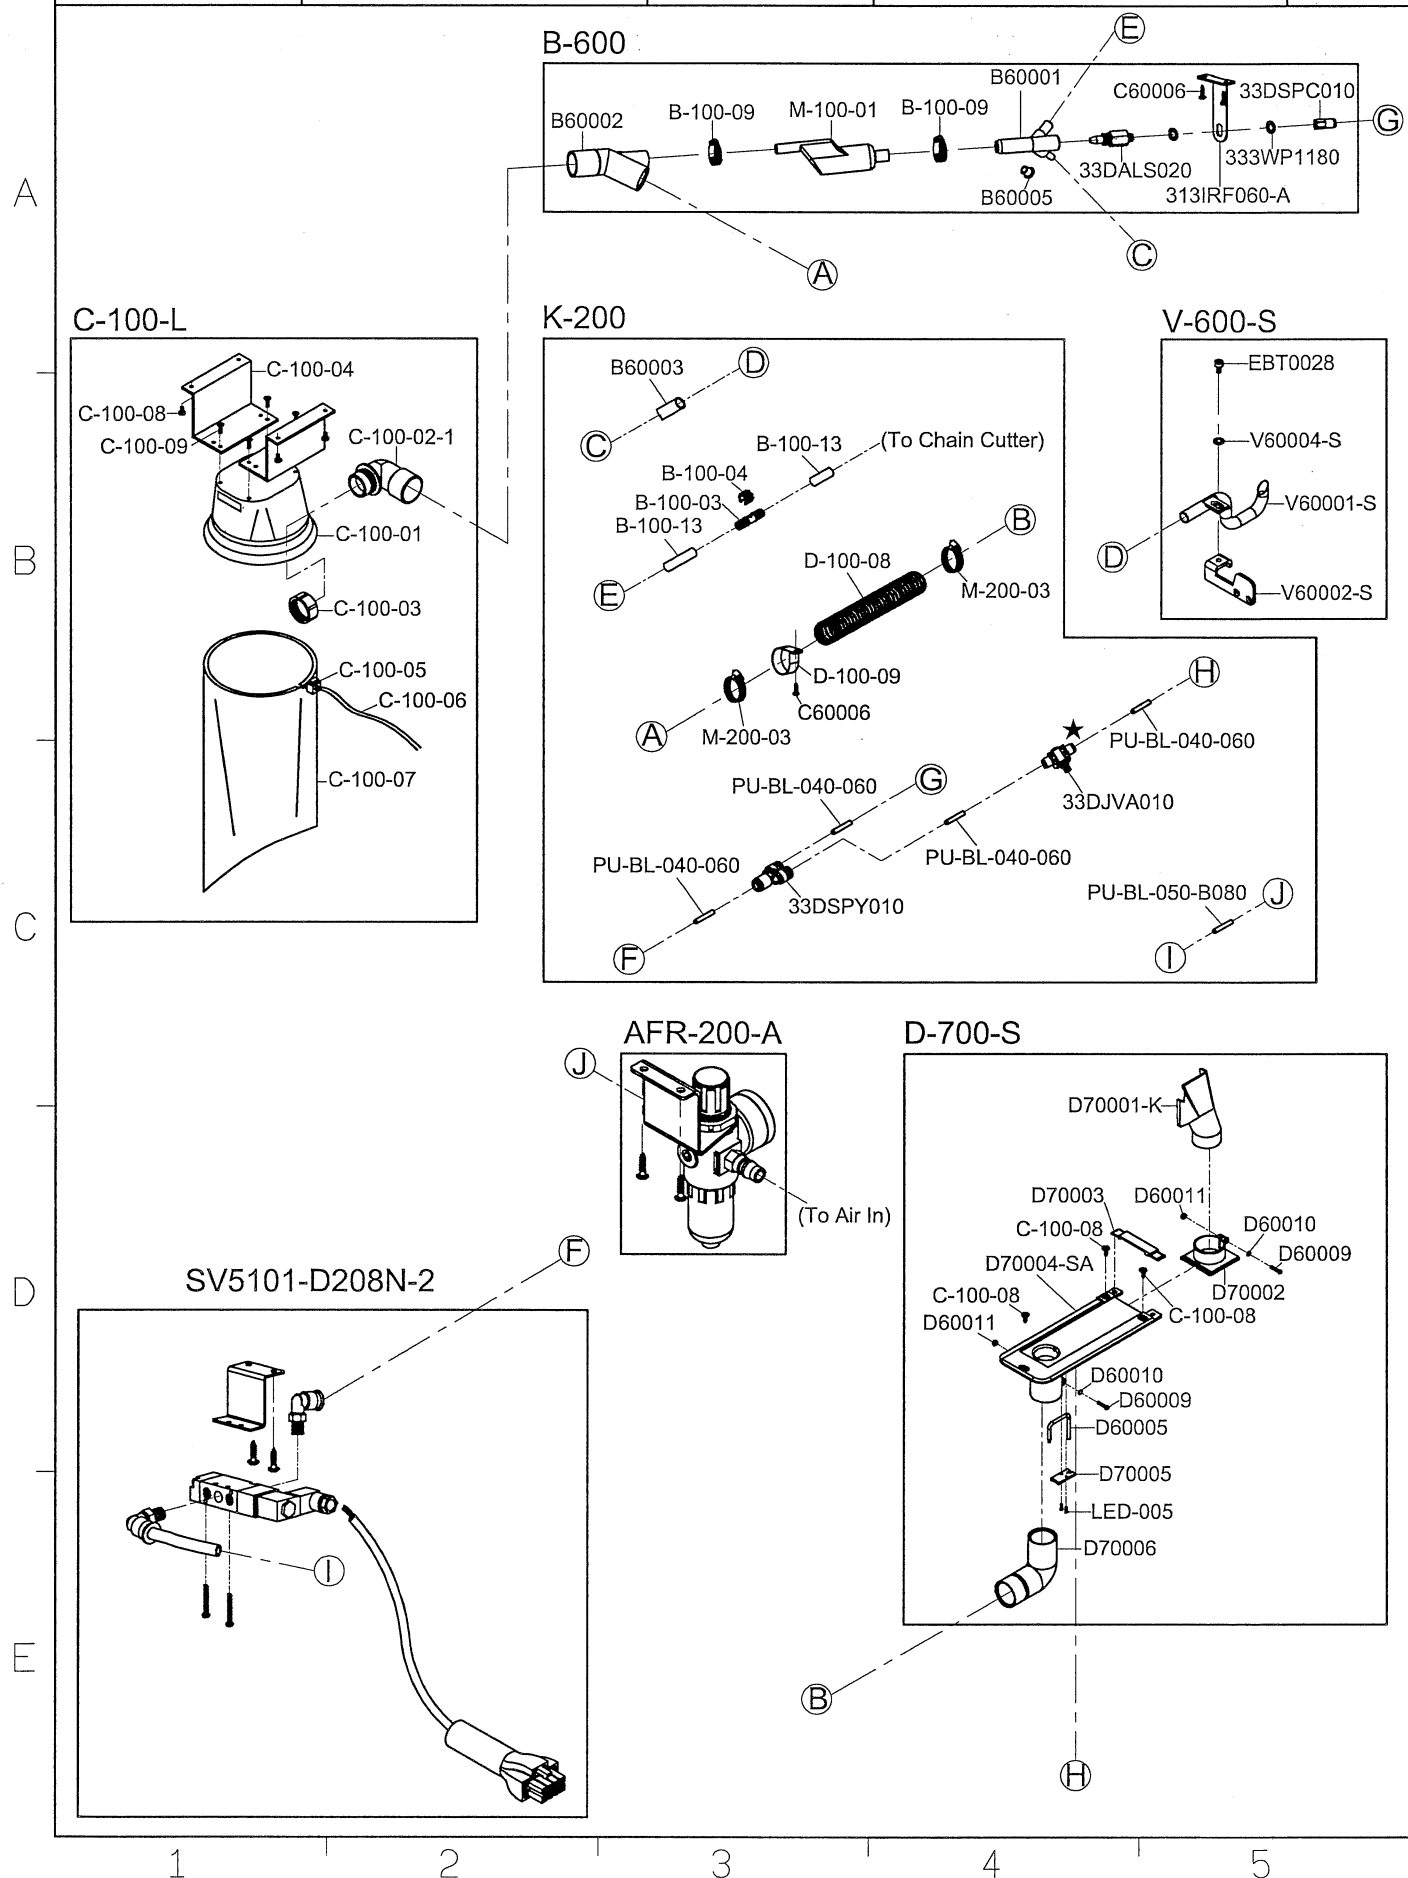


SIRUBA PARTS LIST	Series	Parts Group	Subclass / Remark	Page
	700KST	TUA-38ST	Note 註記: 1) ★ Before installation, please check one side is Air IN, another side is Air OUT. 2) 空氣有效使用壓力 Effective air pressure: 4~6 kg/cm 3) 請適度修剪管子長度，以達到風力最佳效能。	1/1
				Date
				2016/11/02

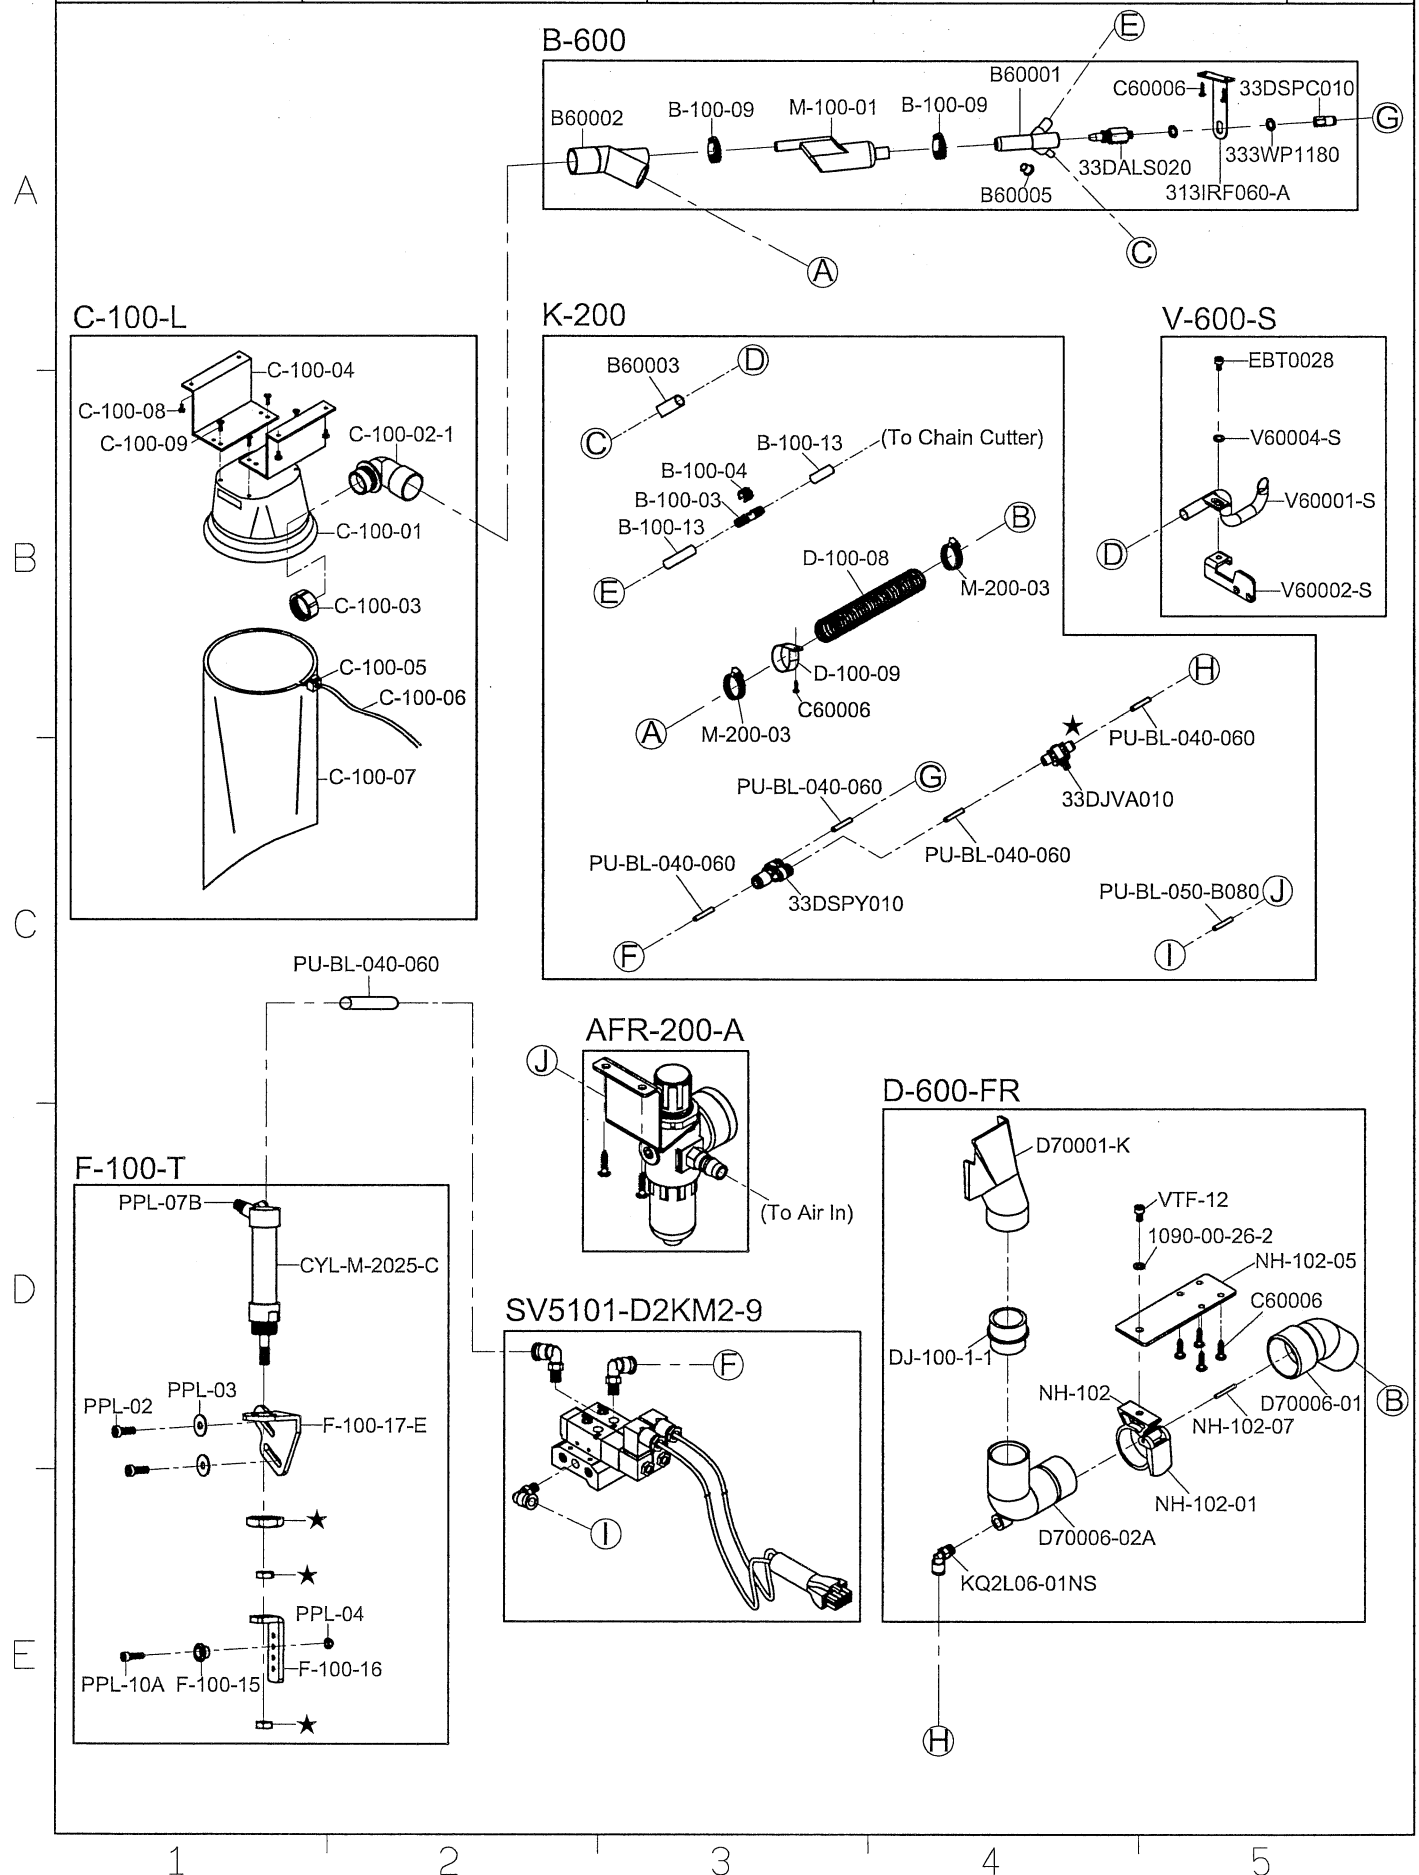


SIRUBA PARTS LIST	Series	Parts Group	Subclass / Remark	Page
	700KS 700KST	TUA-39S	Note 註記: 1) ★ Before installation, please check one side is Air IN, another side is Air OUT. 2) 空氣有效使用壓力 Effective air pressure: 4~6 kg/cm 3) 請適度修剪管子長度，以達到風力最佳效能。	1/1
				Date
				2016/11/02

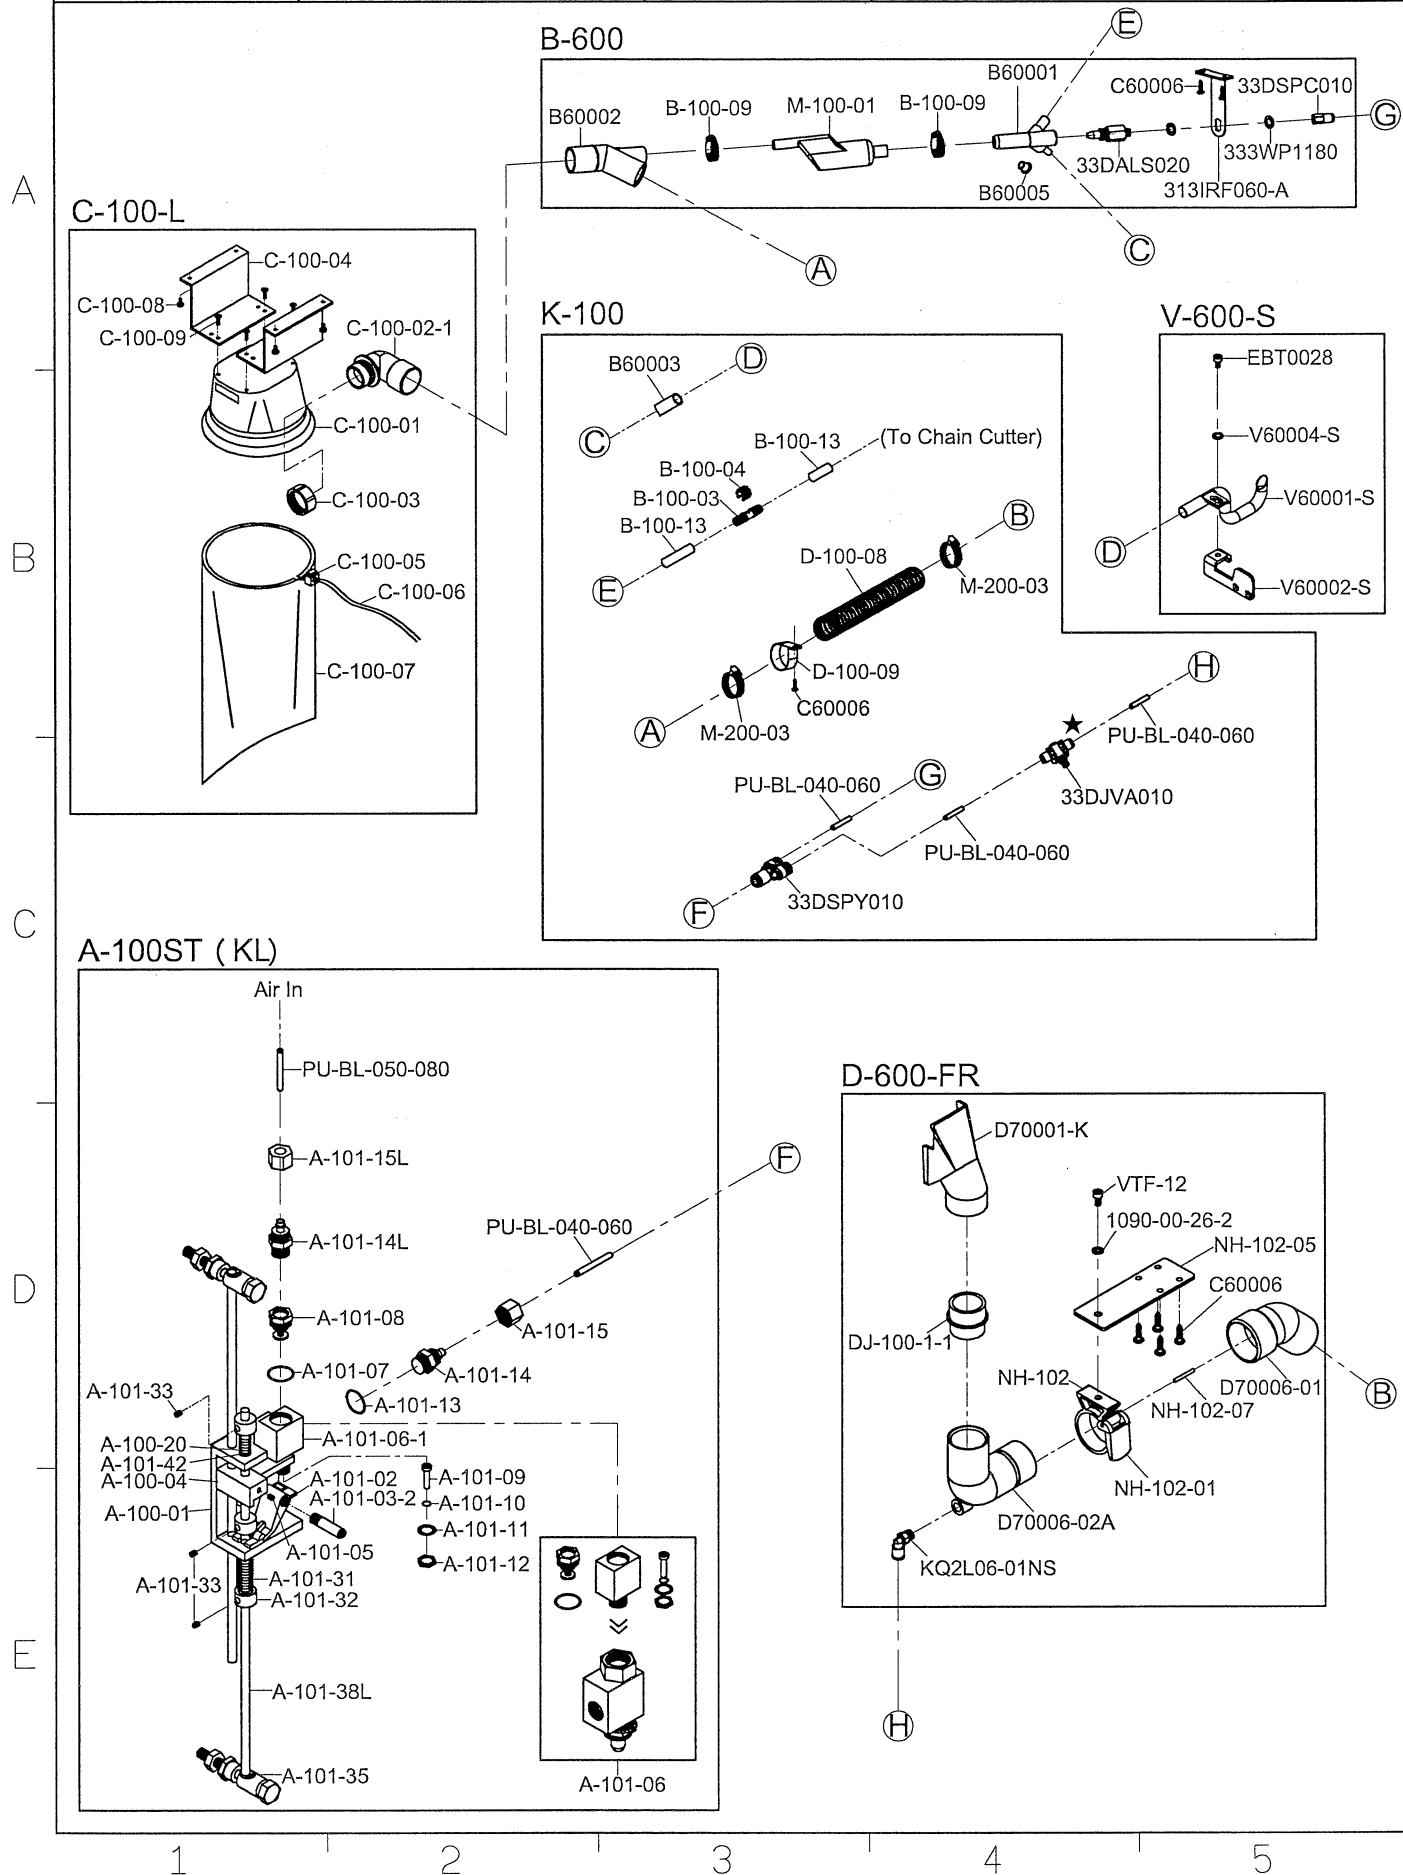


SIRUBA PARTS LIST	Series	Parts Group	Subclass / Remark	Page
	700KST	TUA-40ST	Note 註記: 1) ★ Before installation, please check one side is Air IN, another side is Air OUT. 2) 空氣有效使用壓力 Effective air pressure: 4~6 kg/cm 3) 請適度修剪管子長度, 以達到風力最佳效能。	1/1
				Date
				2016/11/02

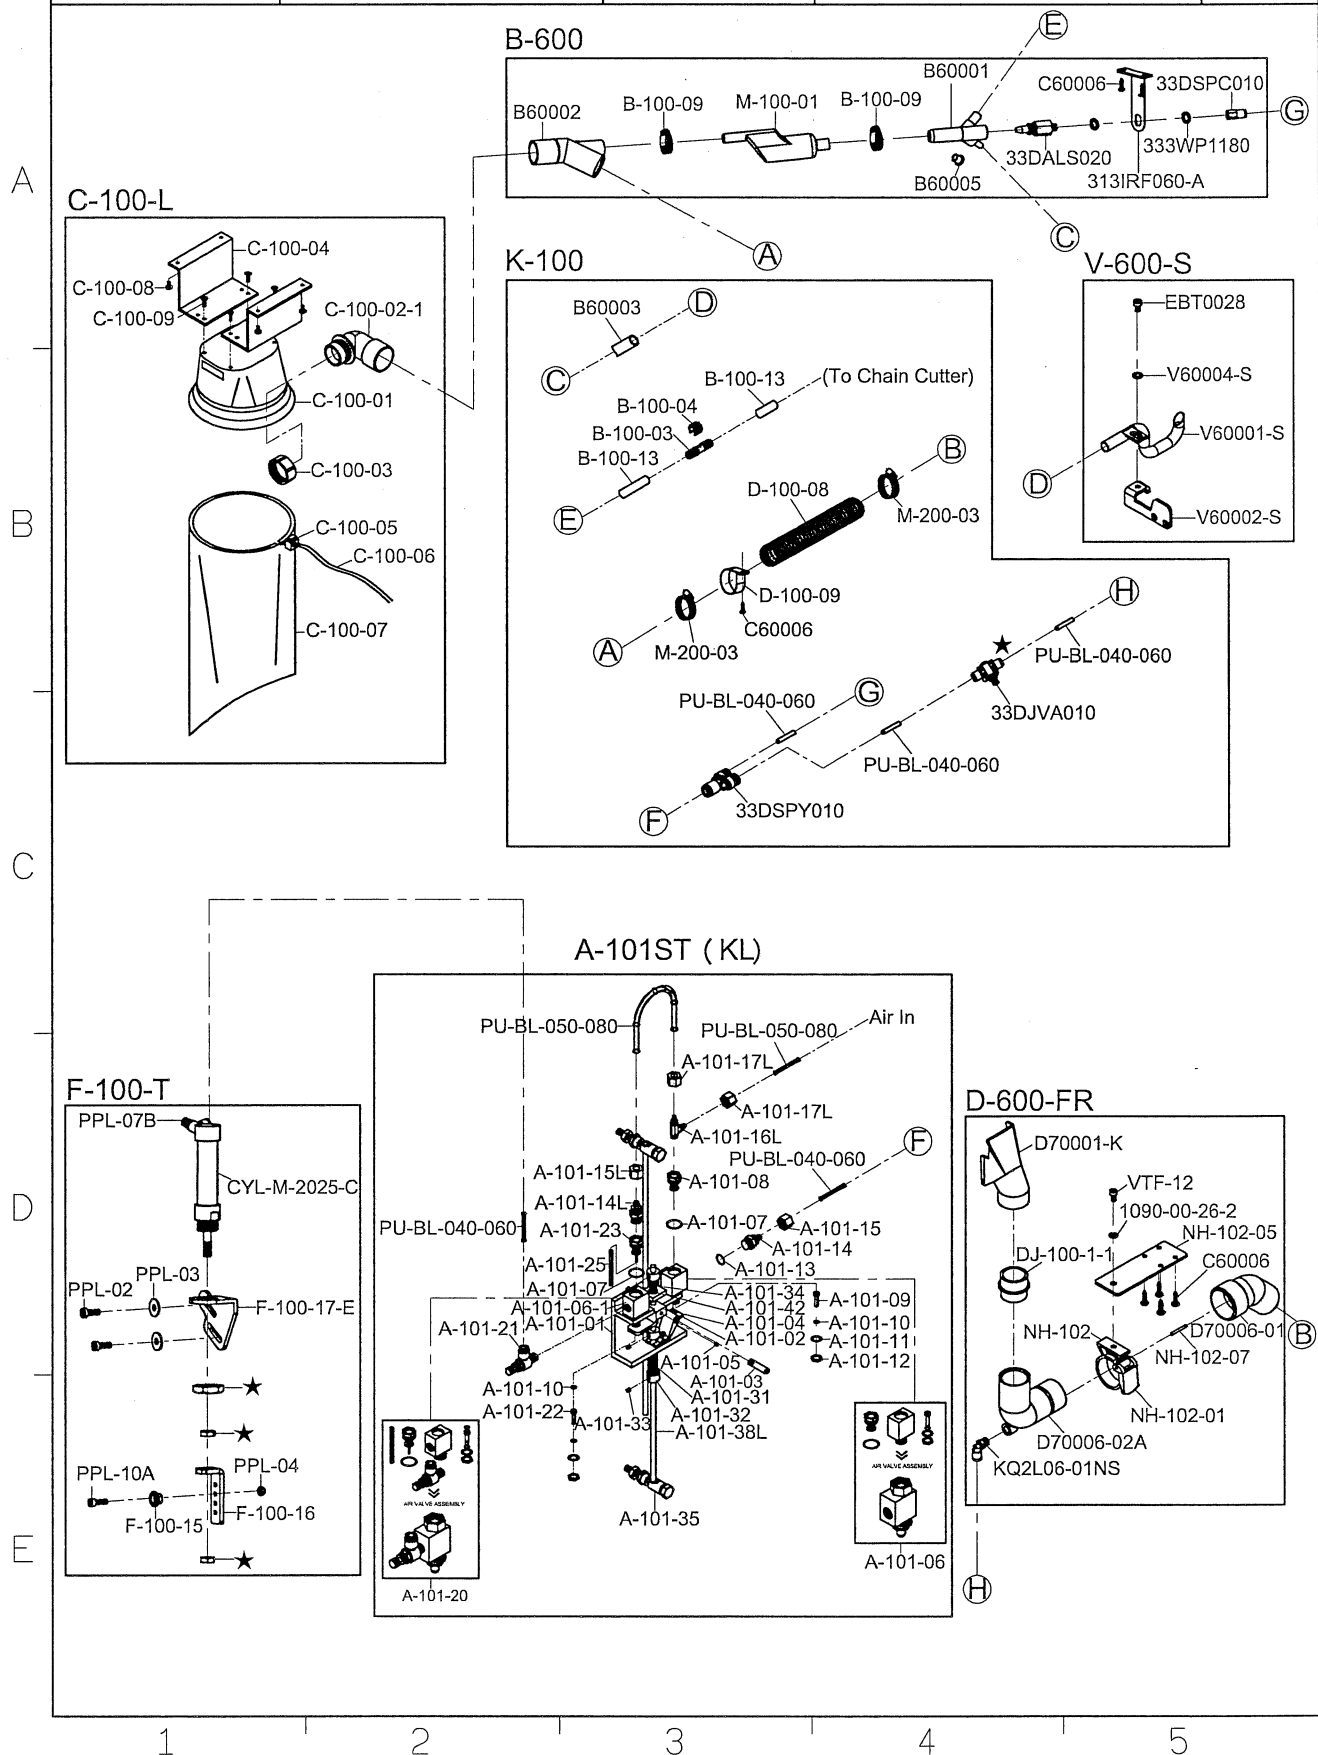


SIRUBA PARTS LIST	Series	Parts Group	Subclass / Remark	Page
	700KST	VT-KS		1/1
				Date
				2014/10/13

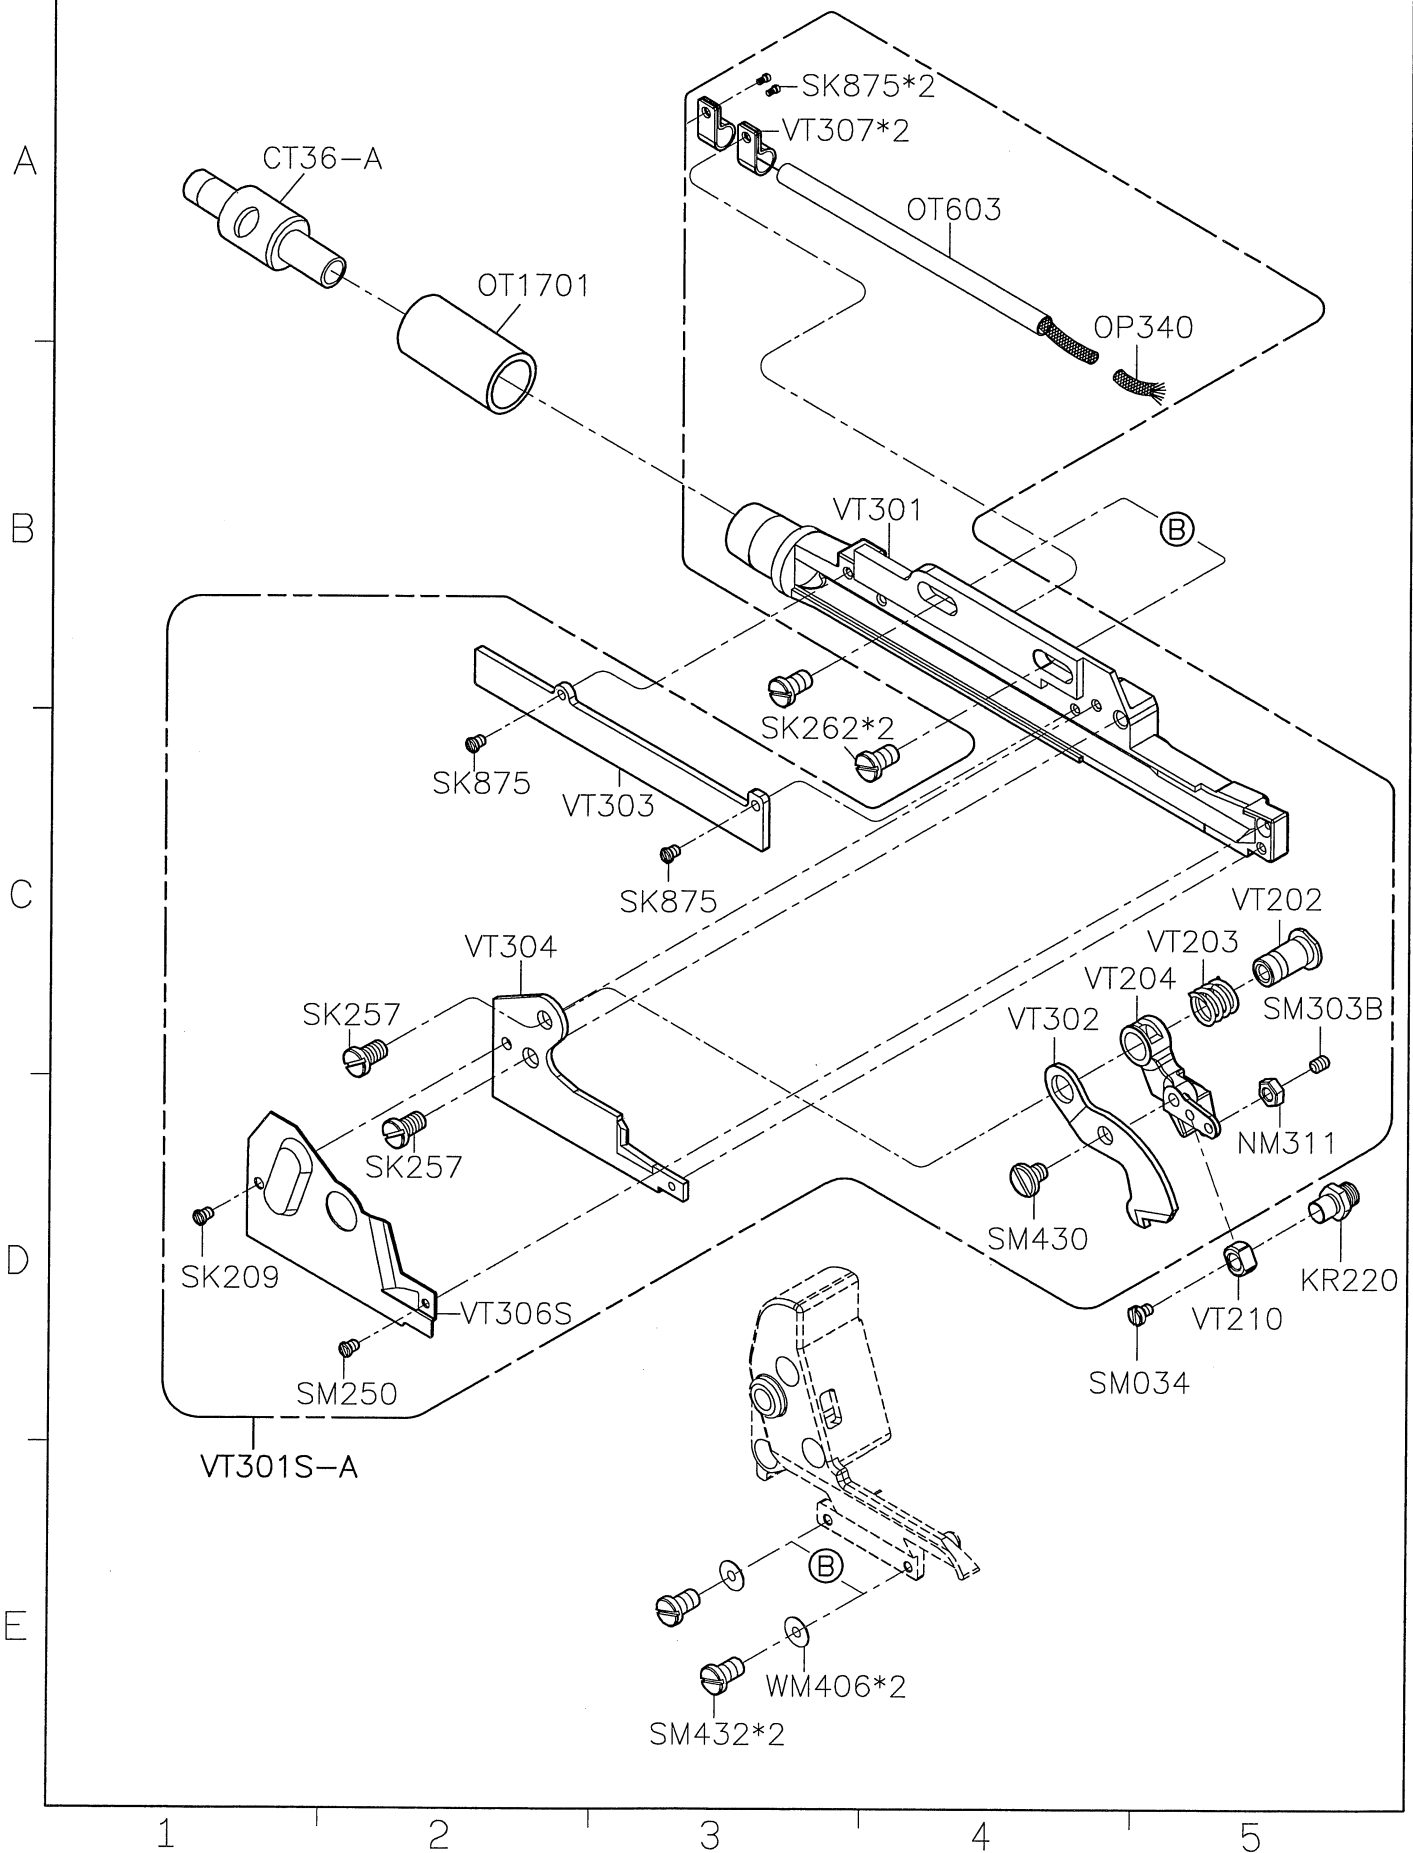

SIRUBA PARTS LIST	Series	Parts Group	Subclass / Remark	Page
	700KST	VT-KST		1/1
				Date
				2017/11/10

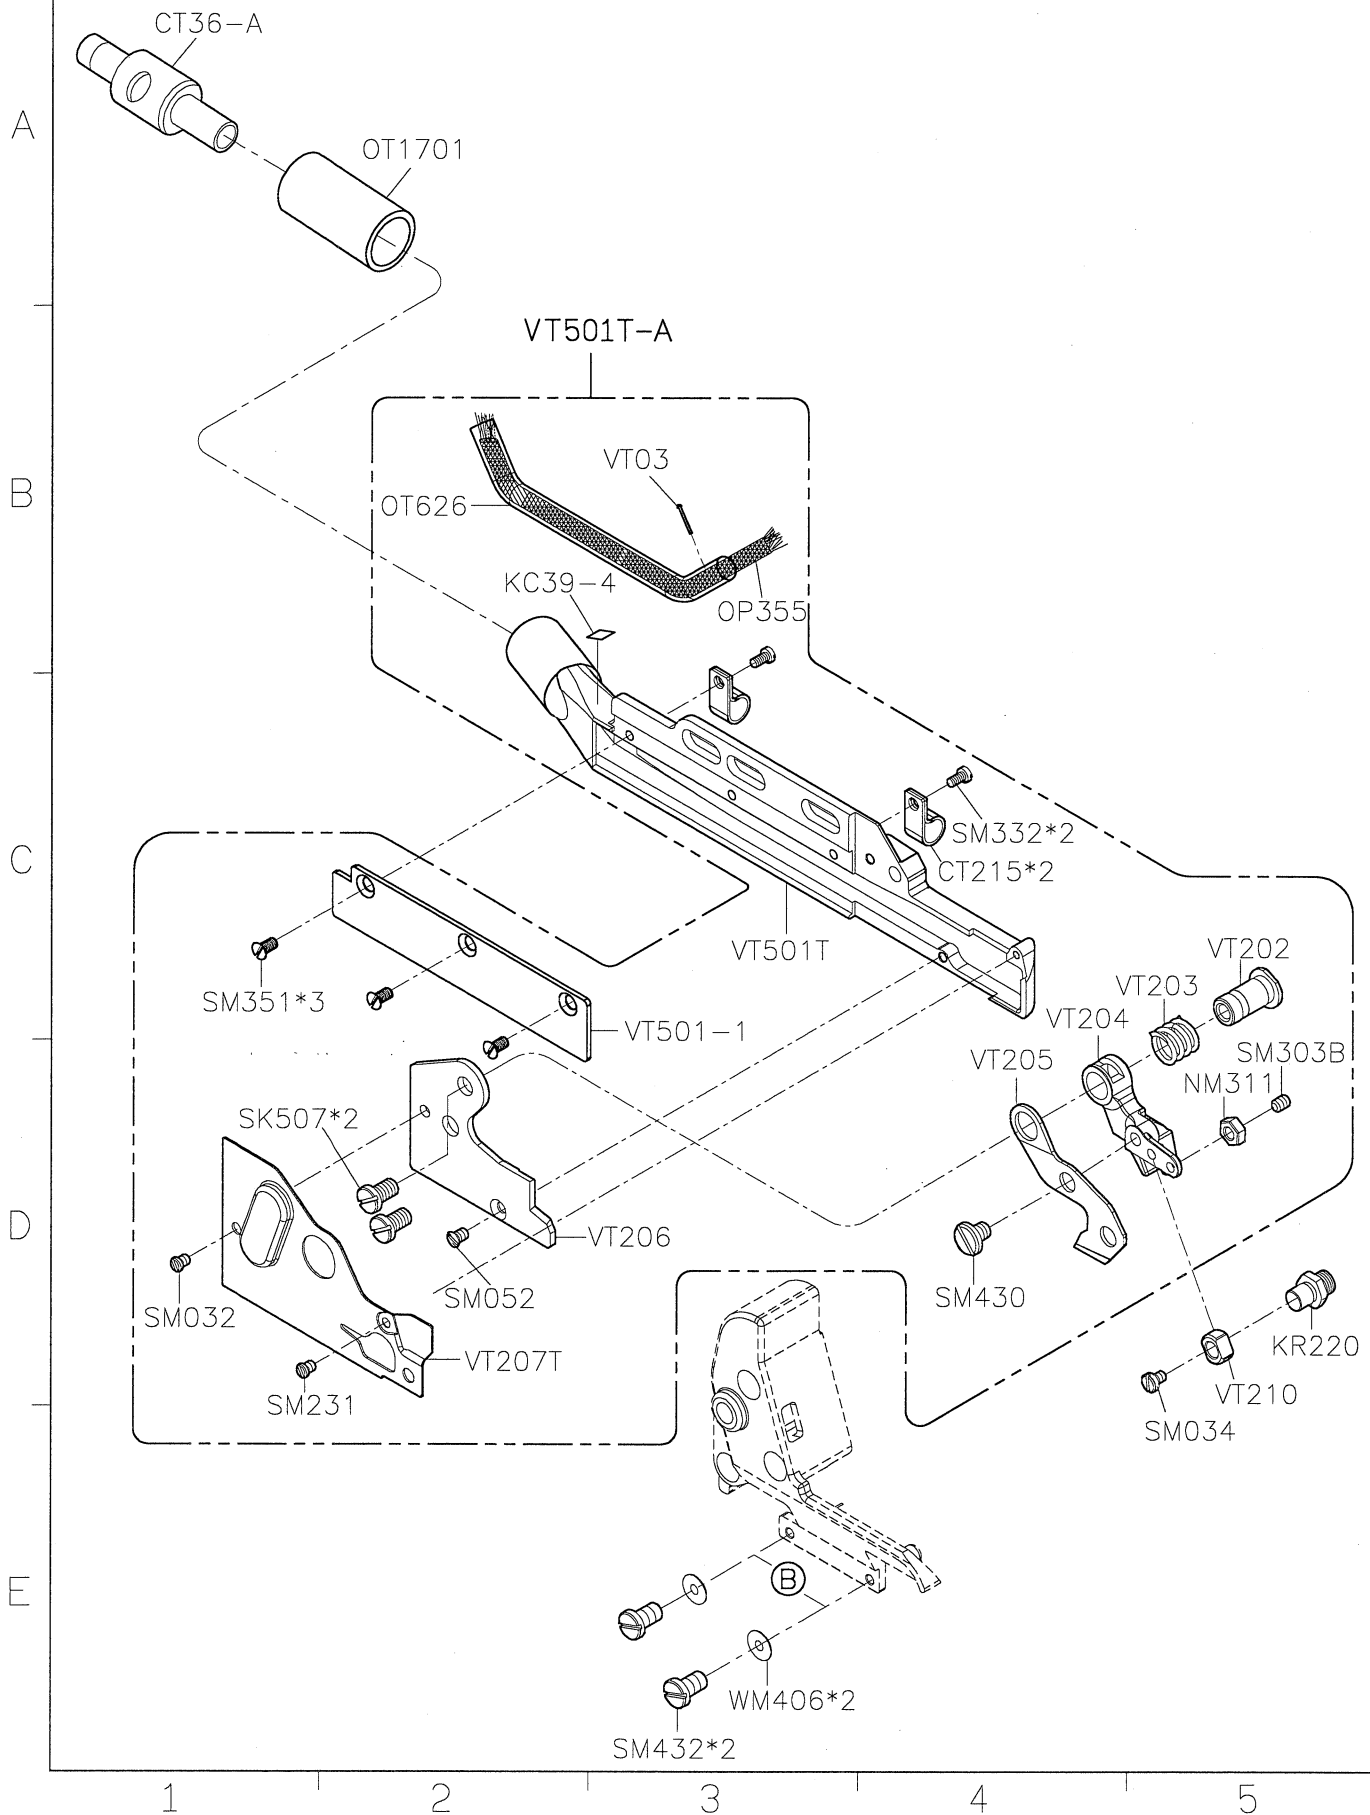

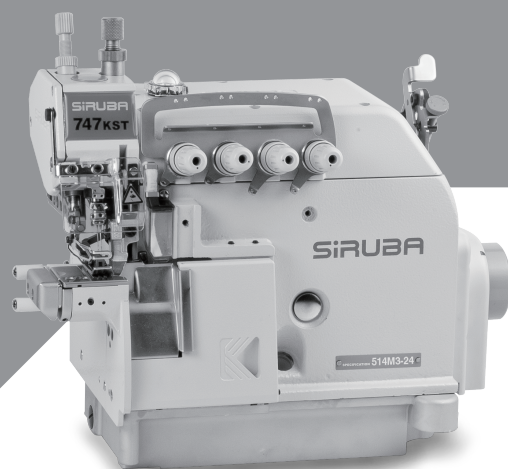

 **高林股份有限公司**
KAULIN MFG. CO., LTD.

由於對產品的改良及更新，本產品使用說明書中與零件圖之產品及外觀的修改恕不事先通知！
The specification and/or appearances of the equipment described in this instruction book & parts list are subject to change because of modification which will without previous notice.
700KST.MAY.2015