

ASC-TBH100

自動T恤下擺折縫機

Automatic T-shirt Bottom Hemming Machine


影片連結
Video link



特點



FEATURES


- 1** 可縫製各式各樣的布料，適用性強，通過性高
Wide range of sewing material applicability.
- 2** 功能模組化設計：自動擴張系統、自動折邊裝置、自動糾偏系統、電動修布刀裝置、張力自動平衡系統及送料收料系統
Functional module design: extending roller system, edge folding device, direction keeping system, electric fabric edge trimmer, tension balance system, and collection system.
- 3** 雙蝸杆渦輪自動糾偏定位裝置，兩蝸杆驅動十渦輪結構，更穩定更完美地解決各種柔性面料
Due to dual-worm drive mechanism, the handling of soft material is perfect, which always keeps the sewing on the right direction.
- 4** 機器操作簡易。工作過程全自動化，放好布片，按開始鍵，機器就自動完成。生手經兩小時培訓練習，就能熟練操作
User-friendly ! Fully sewing automation by loading the material, pressing one key and then sewing finished. From a beginner to be a quick operator by 2-hour training.
- 5** 兩側包縫倒骨同向裝置 (特別訂購)
Two sides' overlock seam folding device (Special order)
- 6** 散口預先包縫免修邊 (特別訂購)
Fabric edge serging prior to hemming (Special order)

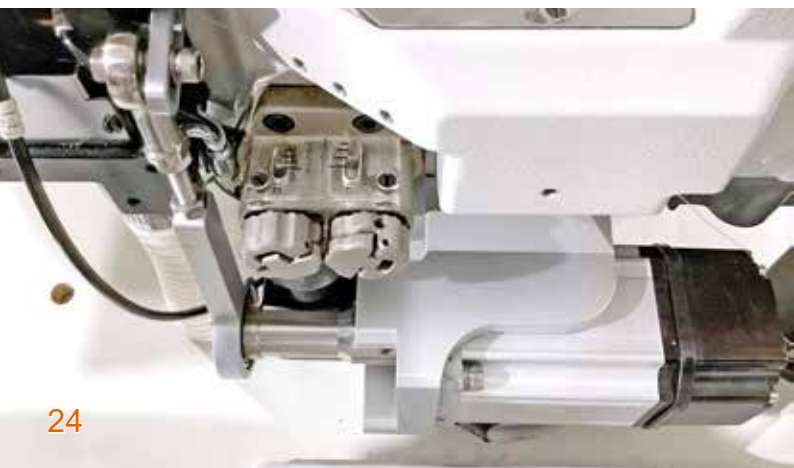

規格

SPECIFICATIONS

型號 Model	ASC-TBH100		
縫紉機機頭 Machine Head	上送筒型 / Top feed cylinder bed type C007KD-W812-□□□/CRL/FFT/UTP or S007KD-W812-□□□/SRL/FFT/UTT	針碼長度 Stitch Length	1.5-5 mm
車縫速度 Sewing Speed	4000 SPM (最高Max)	生產效率 Production Capacity	120~150 pcs/hour
折邊寬度Hemming Width	 <p>折邊寬度 Hem Width 15~30 mm</p>	適用周長(攤平) Circumference of T-shirt bottom(Flattened)	<p>350-800 mm (C007KD) 320-800 mm (S007KD)</p>  <p>320/350~800 mm</p>
使用針型 Needle Type	UY×128	縫紉針距 Stitch Length	4.0 / 4.8 / 5.6 / 6.4 mm 訂購時請選配 Optional by ordering
氣體消耗量 Air Consumption	8 L/min	消費電力 Power Consumption	850 W
氣壓 Air Pressure	0.6 MPa	機器尺寸 Dimensions	1550 x 1250 x 1500 mm
電源電壓 Power Supply	AC 220V , 50/60Hz	淨重 / 毛重 Net / Gross weight	250 KG / 320 KG



配置建議

Recommend Layout

一人操作兩台
One operator with two machines

