DL720 SERIES



FEATURES

DL720

直驱单定针平缝车

Direct-drive needle positioning lockstitch machine



特点

FEATURES

- 机电一体化的完美整合,内置电控箱及控制台,安装简易,使用方便
- 直驱伺服马达,反应快速,动作精准,比离合器马达省电 60%
- 使用方便:配备 LED 照明,内置式绕线器与补针功能
- Mechatronic integration with built-in control box and control panel. It is easy to install and operate.
- Direct-drive servo motor is speedy, accurate, and energy-saving than clutch motor by 60%.
- User friendly: Equipped with LED light, built-in bobbin winder, and stitch compensation function.

DL720-RM1


直驱单定针带刀平缝车

Direct-Drive Needle Positioning Lockstitch Machine & Edge Cutter



采用内置式直驱伺服马达,实现了机器的快速启动和制动的精确度:大幅度降低了噪音和振动,并降低了能耗,与普通的驱动装置相比,电量耗减35%以上,适用於缝制各类衬衫、西服或类似服装。特别是其衣领、前襟等部位,高速缝制时倒顺送料针距能保持完全一致,侧切刀装置使缝纫和修刀工序一次完成,工作效率提高。

With bult-in direct drive servo motor to achieve the accuracy of the machine's rapidstart-up and braking; a significant reduction in noise and vibration, and reduce energy consumption, compared with conventional drive unit, battery depletion of 35% or more, suitable for sewing various shirts, suits or similar garments, especially it's collar, breastand other parts, inverted send high-speed sewing material pitch to be completelyconsistent, side cutter device sewing and knife trimming procedures in one time efficiency.

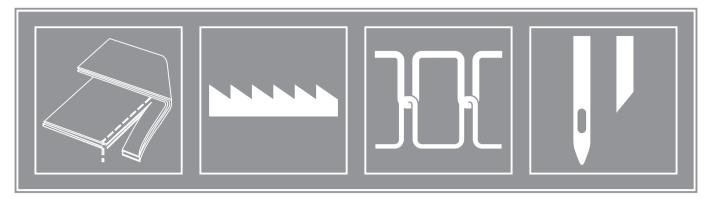

30mm落料空间:

废料从落料口自然滑落,每时每刻保持清爽乾净。

30mm space:

30mm space for giving up the waste, it brings out with a clean working space.

2 黑金刚镀层: 刀架导杆均采用DLC涂层处理,更耐用更耐磨。

Special black coating:

Cutter's stick is made with DLC coating which helps to increase durability.

3 简易定针型可搭配喇叭组,进行布条滚边车 缝 (喇叭为三折卷,人布宽度28mm,出布 宽度8~10mm)

Needle position function models can equip with binders, to perform tape binding. (Binders ar e with 3 folders; entering width is 28mm, exiting width is 8~10mm for material.)



规格 SPECIFICATIONS

DL720	mm <u>-</u> !	Needli No. DB×1	布料厚度 Fabric Weight			<u>~</u>		mm ← →	s.P.M.
			L	М	Н	手动 Hand	膝动 Knee		(Max)
M1	15.8	#11~#14						0-4	4000
H1	18.0	#18~#21				5.5	13	0-5	3500
M1A	15.8	#11~#14						0-6.5	4000

DL720		_,	Needle No.	布料厚度 Fabric Weight			<u>~</u>		mm ←→ 	S.P.M.
		mm -	DB×1	L	М	Н	手动 Hand	膝动 Knee		(Max)
RM1-32	3.2	15.8	#11~#14				4	10~13 (可调 Adjustable)	0~4	3700
RM1-48	4.8									
RM1-64	6.4									

※选配桌板: DL7000T-T1 ※OptionalTable: DL7000T-T1



高林股份有限公司 KAULIN MFG. CO., LTD.

由於对产品的改良及更新,本产品型录中之产品规格及外观的修改恕不事先通知! The specification and/or appearences of the equipment described in this catalogue are subject to change without previous notice because of modification.