

# SIRUBA

電控參數說明書

ELECTRONIC CONTROL PARAMETER MANUAL

■ 600N



# 前言

## Preface

欢迎使用本公司产品，制衣行的正确投资选择！

Welcome to use our products, it is the right investment choices in garment industry!

本说明书为本公司新研发的“一体自动吸风剪线控制箱”产品参考手册，请认真阅读此手册以更好的运用本公司产品！

This user manual is for our newly developed “All-in-one control box” products reference manual, Please read this manual carefully, hope it can give you useful help!

阅读本说明前以下要求说明请注意：

Before reading the manual, please note the following requirements:

1: 用户使用作业前必须可靠接地，保证人生安全！

The user must be grounded before operations to ensure safety

2: 非专业人士请勿拆卸控制箱

Non-professionals do not disassemble the control box

3: 控制箱与电机远离强磁高辐射环境

The control box and motor away from the magnetic high radiation environment

4: 不要在过热环境中作业

Do not work in hot environment

5: 不要在过于潮湿环境中作业

Do not work in humid environments

6: 220V 电控：【220V 接入供电时电压稳定在（AC200V~260/单相）之间】

220V electronic control: [220V access to power supply voltage stability between (200V~260V)]

电源供电电压 Voltage	220V 单相 1 phase
频率 Frequency	50~60HZ
电机转速 Speed	200-6500RPM
电机扭矩 Motor torque	$\leq 2.2\text{N.M}$

## 安全叮嘱:

### Safety requirement:

1: 电机电控接通电源时（开机状态）请不要把脚放在脚踏板上

Do not put your feet on the pedals when the control box and motor is switched on (boot status)

2: 本产品请专业人士安装调试

Let professionals to install and debug this product

3: 严禁在通电时打开控制箱与电机端盖

Do not open the control box and the motor cover when energized

4: 换针，穿线或更换底线时请关闭电源

Please turn off the power when changing the needle,threading or replacing the bottom line

5: 安装，拆卸维修时请拔掉电源插头

During installation and removal service,please turn off the power and pull the plug

6: 翻抬缝纫机时请关闭电源

Please turn off the power when turn lift sewing machine

7: 使用本产品请远离高频电磁波和电波发射器等，以免所产生的电磁波干扰伺服驱动器而发生错误动作。

When use this product, please stay away from high-frequency electromagnetic waves and radio wave transmitters, etc., in case the electromagnetic waves generated interfere with the servo drive to occur wrong action .

### 郑重声明:

#### Solemnly Declare:

1: 不遵守安全使用说明操作规章，发生意外后果自负。

Do not comply with the manual book operating regulations and the safety requirements, all accidental occurrence should be taken by yourself.

2: 未经本公司授权，请勿擅自改动产品，由此而引起的后果本公司不负任何责任。

Without our authorization, please do not alter our products, our company is not liable for any consequences arising therefrom.

### 保修策略:

#### Warranty policy:

1: 本产品自购买起免费保修2年，终身维护。保修期内除人为损坏外出现的任何质量问题可免费修

Since from the purchase of this product,the free 2-year warranty,lifetime maintenance. During the warranty period,any quality problems the product will be free repaired,except artificial damage.

2: 未经本公司同意自行拆卸，改装造成损坏将不给予保修

Without our consent disassemble or modify,the damaged will not give in warranty

3: 但凡出现无法解决的问题可以联系本公司

Whenever find the problem can not be solved,you can contact with our company

# 目录

## Contents

### 电控介绍

## **Servo System Introduction**

### **1:显示屏常用操作介绍**

Introduction of display screen common Operation

### **2:如何进入参数与如何修改参数**

How to enter parameters and how to modify the parameters

### **3:控制箱端口说明**

The control box Port Description

### **4:错误代码解析**

Error code analysis


# 1: 显示屏常用操作介绍: Introduction of display screen common Operation

1.1、显示屏介绍: 它由来两大部分组成(操作界面、显示区域)。





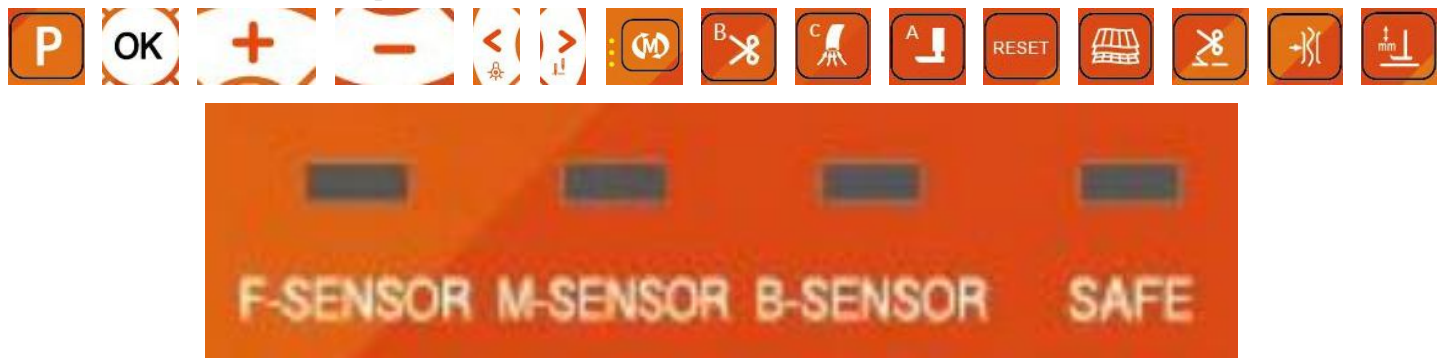

Display screen introduction: it has two parts(operate interface、display area)



## 1.2、操作界面功能键介绍: Operate interface function introduce:






序号 The serial number	按键图标 Parameters of the code	功能说明 function instruction

1	 (菜单键) (Menu key)	触摸一下进入用户参数 Touch to enter into the user parameter	长触摸进入系统参数(需要密码) Long touch to enter into the system parameter(need code)
2	 (确认键) (Confirm key)	参数确定键 parameter confirm key 长按 1s 快速锁屏, 单按解锁 long press for 1s to quickly unlock, single press to unlock	
3	 (数值调整键) (Value adjust key)	参数号向上递增键(修改数据时加) Parameter no. Add key (when modify the data)	
4	 (数值调整键) (Value adjust key)	参数号向下递减键(修改数据时减) Parameter no. Reduce key (when modify the data)	
5	 (左移键) (Left move key)	向左键(在进入参数项时光标向左移) Left key (The cursor moves to the left as the parameter entry is entered)	
6	 (右移键) (Right move key)	向右键(在进入参数数值或选项时光标向右移) Right key (The cursor moves to the right as the parameter entry is entered)	
7	 (模式切换键) mode change key	<p>           触摸  键进入: <u>全自动、半自动、自由缝、全手工</u>等之间切换;            全自动: 当布料盖住第一光眼时, 机器会自动启动工作不需用脚去踩踏调速器踏板;            半自动: 布料遮住第一光眼, 脚踏调速器才能驱动机器工作;            自由缝: 无布料遮住第一光眼, 脚踏调速器一样也能驱动机器工作;            全手工: 剪线、抬压脚等所以动作需要人工去完成;            ※:全自动、半自动、自由缝等安全开关断开情况下脚踏调速器无法驱动机器工作;            全手工: 安全开关断开情况下一样能使用脚踏调速器启动机器工作)。         </p> <p>           Touch  key to enter to change to: fully automatic, semi-automatic, free sewing, full manual;            Fully automatic: When the cloth covers the first sensor, the machine will automatically start working without pressing the pedal;            Semi-automatic: when the cloth covers the first sensor, need to press the pedal to drive the sewing machine to start working;            Free sewing: no cloth to cover the first sensor, just press the pedal can drive the sewing machine to work;            Full manual: the thread cutting、presser foot lifter and all other action should be made by hand;            *: when the mode is under fully automatic, semi-automatic, and free sewing , press the pedal can not drive the sewing machine to work when the safety switch if off;            Full manual: Press the pedal can be used to start the sewing machine when the safety switch is off.         </p>	

8

  
 (剪线模式切换键)  
 (auto trimmer mode  
 change key)

单触摸  键一下进入“剪线模式”选择，触摸  键可移动光标选择模式，或者触摸

、 键移动光标选择模式，选择好模式后触摸  键进入参数调整：

剪线模式：前剪线、后剪线、前后剪线、剪线关闭。

※：移动光标选择参数同上面方法。

Single touch  key to enter " thread cutting mode" option, touch  key can move




cursor select mode, or touch 、 key to move cursor select mode,when mode

is finish choosing, touch  key to enter the parameter adjustment:

Thread cutting mode: Front thread cutting, back thread cutting, front and back thread cutting, thread cutting close.

\* : Move Cursor to select parameters as above.

长触摸  键进入“剪线参数”选择；触摸  键可移动光标选择模式，或者触摸


、 键移动光标选择模式，选择好模式后触摸  键进入参数调整：

剪线参数：

S03	前剪线延迟针数	022
S04	后剪线延迟针数	000
S24	手动剪线	1
S25	安全开关	3
S26	切刀保留时间	0025

Long touch  key to enter the "thread cutting parameters" selection; touch  key can

move cursor select mode, or touch 、 key move cursor select mode, when

finish then touch  key to enter parameters adjustment:




Thread cutting parameters:

S03	front thread cutting delay stitches	022
S04	back thread cutting delay stitches	000
S24	thread cutting by hand	1
S25	safety switch	3
S26	knife remain time	0025

9



























  
 (吸气模式切换键)  
 (auto suction mode  
 change key)






单触摸  键一下进入“吸气模式”选择，触摸  键可移动光标选择模式，或者触摸

、 键移动光标选择模式，选择好模式后触摸  键进入参数调整：

吸气模式：前吸气、后吸后、前后吸气、吸气关闭。






※：移动光标选择参数同上面方法。

		<p>Single touch  key to enter "suction mode" option, touch  key can move cursor select mode, or touch  、  key to move cursor select mode, when mode is finish choosing, touch  key to enter the parameter adjustment: Suction mode: front suction, back suction, front and back suction, suction close. * : Move Cursor to select parameters as above.</p> <p>长触摸  键进入“吸气参数”选择; 触摸  键可移动光标选择模式, 或者触摸  、  键移动光标选择模式, 选择好模式后触摸  键进入参数调整: 吸气参数: S05 前吸气延迟开启针数 002 S06 前吸气关闭针数 014 S07 后吸气延迟开启针数 002 S08 后吸气延时关闭 0200 S13 中吸气延迟开启针数 050 S14 中吸气关闭针数 020</p> <p>Long touch  key to enter the "suction parameters" selection; touch  key can move cursor select mode, or touch  ,  key move cursor select mode, when finish then touch  key to enter parameters adjustment: Suction parameters: S05 front suction delay start stitches 002 S06 front suction close stitches 014 S07 back suction delay start stitches 002 S08 back suction delay close 0200 S13 middle suction delay start stitches 050 S14 middle suction close stitches 020</p>
10	 (压脚模式切换键) (presser foot lifter mode change key)	<p>单触摸  键一下进入“压脚模式”选择, 触摸  键可移动光标选择模式, 或者触摸  、  键移动光标选择模式, 选择好模式后触摸  键进入参数调整: 压脚模式: 前抬压脚、后抬压脚、前后踏压脚、踏压脚关闭。</p> <p>Single touch  key to enter the "presser foot lifter mode" option, touch  key can move cursor select mode, or touch  ,  key move cursor select mode, after selecting the mode, then touch  key enters the parameter adjustment: Presser foot lifter mode: front presser foot lifter、back presser foot lifter、front and back presser foot lifter、foot presser lifter closed.</p>

长触摸  键进入“压脚参数”选择；触摸  键可移动光标选择模式，或者触摸 、 键移动光标选择模式，选择好模式后触摸  键进入参数调整：


压脚参数：






S19 前抬压脚保留时间	0220
S20 后抬压脚延迟启动	0000
S21 抬压脚保护时间	006
S22 放压脚保护时间	020
S31 压脚全力时间	180
S32 压脚全力功率	100
S33 压脚保持功率	20
P22 关闭手动抬压脚	0

Long touch  key to enter the " presser foot lifter mode" option, touch  key can move cursor select mode, or touch 、 key move cursor select mode, after selecting the mode, then touch  key enters the parameter adjustment:






Presser foot lifter parameter:

S19 front presser foot lifter remain time	0220
S20 back presser foot lifter delay start	0000
S21 presser foot lifter protect time	006
S22 release presser foot protect time	020
S31 presser foot full power time	180
S32 presser foot full power power	100
S33 presser foot maintain power	20
P22 close manual presser foot lifter	0






11  (松线模式切换键) (thread tension releasing mode change key )

单按  键一下进入“松线模式”选择，触摸  键可移动光标选择模式，或者触摸 、 键移动光标选择模式，选择好模式后触摸  键进入参数调整：

松线模式：前松线、后松线、前后松线、松线关闭


Single touch  key to enter the "thread tension releasing mode" option, touch  key can move cursor select mode, or touch 、 key move cursor select mode, after selecting the mode, then touch  key enters the parameter adjustment:


Thread tension releasing mode: front thread tension releasing、back thread tension releasing、front and back thread tension releasing、 thread tension releasing closed.

长触摸  键进入“松线参数”选择；触摸  键可移动光标选择模式，或者触摸 、 键移动光标选择模式，选择好模式后触摸  键进入参数调整：

松线参数：

S09 前松线延迟开启	000
S10 前松线针数	012
S11 后松线延迟开启	000

Long touch  key to enter the "thread releasing mode, presser foot lifter mode" option,




		 key can move cursor select mode, or touch  ,  key move cursor  select mode, after selecting the mode, then touch  key enters the parameter adjustment: <b>Thread releasing parameter:</b> S09 front thread releasing delay start      000 S10 front thread releasing stitches          012 S11 back thread releasing delay start        000	
12	 (布料识别模式) (fabric identification mode)	点按  键、此时会出现“ <u>****</u> <u>布料选择****</u> ”，点按  键进入当前光眼灵敏度和微调、粗调灵敏度参数； Press  key on the cloth selection interface, the display shows ****cloth choose***, press  key to enter the sensor sensitivities, fine-tune it or rough adjust.	
13	 (短线头模式) (short thread end mode)	点按  键开启短线头模式，再次点按  键关闭短线头模式 Press  key to turn on the short thread end mode,press  key again to turn off the short thread end mode.	
14	 (压脚高度调节) (presser foot height adjustment mode)	点按  键进入压脚高度调节模式，选择 5.0,5.5,6.0,6.5 对压脚高度进行调节 Press  key to enter the presser foot height adjustment mode,choose “5.0,5.5,6.0,6.5”to adjustment the presser foot height.	
15	 (恢复出厂设置) (reset the factory setting)	点按  键进入恢复出厂设置选项。 Single touch  key to enter the reset factory setting option.	
16	F-SENSOR	前光眼指示灯 Front sensor indicator	当光眼被挡住时，此灯亮、未挡住时不亮；如未被挡住时，此灯亮起；则需要检查光眼灵敏度。 When the sensor is blocked, the light will be on, when it is not blocked, the light is not on ; if it is not blocked, the light is on; the sensor sensitivity needs to be checked.
17	M-SENSOR	中光眼指示灯 Medium sensor indicator	当光眼被挡住时，此灯亮、未挡住时不亮；如未被挡住时，此灯亮起；则需要检查光眼灵敏度。 When the sensor is blocked, the light will be on, when it is not blocked, the light is not on ; if it is not blocked, the light is on; the sensor sensitivity needs to be checked.
18	B-SENSOR	后光眼指示灯 Back sensor indicator	当光眼被挡住时，此灯亮、未挡住时不亮；如未被挡住时，此灯亮起；则需要检查光眼灵敏度。 When the sensor is blocked, the light will be on, when it is not blocked, the light is not on ; if it is not blocked, the light is on; the sensor sensitivity needs to be checked.
19	SAFE	安全指示灯 Safety switch indicator	当安全开关断开时，SAFE 灯亮起时，则检查一下安全开关是否感应到。

When the safety switch is off and the SAFE light is on, check that the safety switch is responsive.

## 2: 如何进入参数与如何修改参数:

### How to enter parameters and how modify the parameters







技术员系统参数列表如表 1:

2.1、长触摸 () 键持续 3 秒钟进入“系统(S)参数”列表 (需要密码进入调整)。(  ) (  ) 键将选取修改的是参数值还是菜单值, 触摸后选取的地方将会出现闪烁。(  ) (  ) 键将增加或减少闪烁区的数值, 修改完毕参数后需要按 (  ) 键保存参数并退出系统参数。

注: 以上是进入方法, 具体参数号代表的参数意思详情如表 1:

出厂值密码: 2014







System parameter entering analysis:

2.1、 Long press (  ) button for 2seconds to enter “System Parameter” list (requires a password to enter the adjustment).(  ) (  ) key to select to modify parameter value or menu value. Then,the selected value will be flashing .(  ) (  ) key to increase or decrease the value.After completing modification,press (  ) button to save parameters and quit system parameters.







※Above is to enter method,the details of specific parameters describe as followings:

※ Factory default password:2014

工人参数列表如表 2:

2.2、触摸 ( ) 键直接进入参数, (  ) (  ) 键将选取修改的是参数值还是菜单值, 触摸后选取的地方将会出现闪烁。(  ) (  ) 键将增加或减少闪烁区的数值, 修改完毕参数后需要按 (  ) 键保存参数并退出系统参数。

Workers parameters list as table 2:

2.2, touch the ( ) key directly into the parameters, (  ) (  ) key will choose to modify the parameters or menu values, touch the selected place will be flashing. The (  ) (  ) key will increase or decrease the value of the scintillation region. After modifying the parameters, press the (  ) key to save the parameters and exit the system parameters.

技术员系统参数列表: Technician system parameter list 表 1

序号 System parameter list	功能说明 Function description	功能参数默认 值 Parameter default values	功能参数范围 Parameter Adjustment range	参数说明 Parameter description
S01	针迹 Thread track	3	1~4	
S02	两传感器间针数 Stitch number between two	20	1~150	设定两个光眼之间的针数 Set stitch number between two sensors

	sensors			
S03	前剪线延时针数 Delay stitch number to cut thread after front sensors	022	0~150	后面光眼感应到布后延迟剪线的针数 Set delay stitch number after passing front sensors.Auto cut thread after stitches
S04	双光眼模式 后剪线延迟针数 Delay stitch number to cut thread after two sensors	14	0~150	布离开第二光眼离开后延迟剪线的针数 Set delay stitch number after passing two sensors.Auto cut thread after stitches
	三光眼模式 前剪线延迟针数 Delay stitch number to cut thread after three sensors	0	0~100	布离开第三(後)光眼离开后延迟剪线的针数 Set delay stitch number after passing two sensors.Auto cut thread after stitches
S05	前吸延迟气开启针数 Delay stitch number for starting front air suction	2	1~150	布感应到第一个光眼后从第几针开始吸气 Set delay stitch number for starting front air suction after triggering first sensor
S06	前吸气针数 Front suction close stitches no.	14	1~150	吸气打开后, 计数几针后关闭吸气 Account how many stitches begin to close former suction
S07	后吸气延迟开启针数 back suction start stitches no.	2	1~150	离开后光眼后第几针开始吸气 After leaving latter photo-eye,how many stitches begin suck
S08	后吸气延时关闭 the delay of back suction close	200	50~5000MS	布离开光眼后, 计数几毫秒后关闭吸气 After leaving latter photo-eyes,count how many milliseconds off suction
S09	前松线延迟开启针数 front thread loose delay	00	0~150	無說明
S10	前松线针数 Front thread loose stitches	12	0~150	無說明
S11	后松线延迟开启针数 Back thread loose start	00	0~150	無說明
S12	停车延迟针数 machine stop delay stitches no.	002	1~150	後剪完线后多少针自动停车 How much stitches auto parking after trimmer
S13	中吸气延迟开启针数 middle suction start stitches no.	50	1~250	中吸气间隔针数 middle suction interval stitches
S14	中吸气针数 middle suction close stitches no.	20	1~150	中吸气针数 Middle suction stitches
S15	后剪光眼(第三光眼)延迟检测针数 the needle no. of the delay of back cutting line	25	1~100	三光眼模式: 布离开中光眼经过多少针后没检测到第三光眼信号就开始剪线 Leave in the light eye after much after the needle cannot detect the third eye signal begins to cut the line
S16	前传感器响应时间 front sensor respond time	40	1~1000MS	前面光眼感应到后响应的的时间 The response time when former photo-eye sense
S17	前传感器灵敏度 front sensor sensitivity degree	55%	5~100	为适应不同布料设定前光眼的发射强度 Setting photo-eye through the fabric strength,to adapt to different fabrics
S18	后传感器灵敏度 Back sensor sensitivity degree	55%	5~100	为适应不同布料设定后光眼的发射强度 Setting photo-eye through the fabric strength,to adapt to different fabrics
S19	前抬压脚保留时间 front foot presser lift retaining time	220	100~2000MS	前光眼感应到布时压脚自动抬起维持时间 when front sensor feel the cloth, the foot presser lifter maintain time
S20	后抬压脚延迟启动 back foot presser lift start time	0	0~2000MS	脚踏板后踏压脚响应的的时间(毫秒) The lift foot response time after latter foot pedal(millisecond)
S21	抬压脚保护时间 foot presser protection time	6	1~120S	手动抬压脚持续多少时间后自动关闭压脚输出(秒) Lifter the foot presser by hand some time then Auto close foot presser output(second)
S22	放压脚保护时间 release foot presser protection	20	20~800MS	压脚释放保护时间(毫秒) the foot presser release protection time (millisecond)

	time			
S23	连续送布吸气剪线 continue feed cloth suction cutting line	0	0~1	0: 关闭 1: 开启 0:Close 1:Open
S24	运转中手动开关动作 operate manual switch action	1	0~3	0: 电机运转时按手动剪线不剪, 1: 可以剪(全手工模式時有效) 2: 运行中禁止中光眼保护 3: 运行中禁止中后光眼保护 0: when motor is running, press knife switch the thread line is not cutting, 1: Can Cut (under the manual mode) 2: when the machine is running, the middle sensor protect is prohibition 3:when the machine is running, the middle and back sensor protect is prohibition
S25	安全开关选择 safe switch choice	3	0~3	0: 关闭安全开关 1: 缝台安全开关 2: 压脚安全开关 3: 缝台+压脚安全开关开启 0:turn off safety switch 1:sewing plate safety switch 2:Foot presser safety switch 3: sewing plate and foot presser safety switch is on
S26	切刀保留时间 the knife retaining time	25	1~1000MS	切刀动作时间(基本不用调整) Cutting action time (basically no need adjustment)
S27	界面恢复时间 recover time	5	5~100S	控制面板在进入菜单后多少时间跳回主界面 After entering the control panel ,how much time to jump back to the main menu interface
S28	光眼模式(数量选择) sensor mode (number choice)	2	1~2	1:单光眼 2:双光眼(※:第三光眼需要单独开启 S35) 1:single photo-eye 2:double photo-eye
S29	前光眼极性选择 front sensor polarity	0	0~1	0: 對射 1: 反射 Opposite polarity opposite
S30	后光眼极性选择 back sensor polarity	0	0~1	0: 對射 1: 反射 Opposite polarity opposite
S31	压脚全力间 foot presser full power time	180	10~990MS	压脚全功率工作时的时间 Time of full power operation
S32	压脚全力功率 foot presser full power	100	20~100%	压脚开始动作时, 瞬间的输出功率 When the foot starts to move, the instantaneous output power
S33	压脚保持功率 foot presser retaining power	20	10~90%	压脚抬起后维持住后的功率(不能超过 50) Pressure foot lift after the maintenance of the power to live (not more than 50)
S34	后剪光眼灵敏度(剪刀边上)第 三光眼 back cutting line sensor sensitivity degree	55	5~100%	第三光眼发射强度 the third sensor Emission intensity
S35	后剪光眼开启(剪刀边上) back cutting line sensor start	2	0~2	0: 关闭 2: 开启 0: closed 2: open
S36	预留 obligate	0	0~9	
S37	语言选择 language choice	0	0~3	0: 中文 1: 英文 2: 土耳其 3: 越南文 0:Chinese 1:English 2: Turkish 3: Viet Nam
S38	最大速度锁定 the max speed locked	5500	250~7000	电机的最大可调速度限制 Maximum adjustable speed limit for motor
S39	参数复位 parameter reset	0	0~1	调到 1 长按 OK 键有效 Transferred to 1 long-press the OK button to effective
S40	参数密码 Parameter code	2014		注: 如记不住密码, 切记勿修改; 如修改密码 忘记, 需寄回厂家从新解密。 Note: If you can't remember the password, don't change it. If you change the password and forget it, you need to send it back to the manufacturer

				for re-decryption.
S41	预留 obligate	2500	250-4500	
S42	预留 obligate	008	1-100	
S43	网孔针数 Net hole needle stitches	04	0-15	
S44	布料选择 Cloth choice	1	0-7	0:厚料 1:普通 2:薄料 3:透明 4:大网 5:小网 0: heavy materials 1: normal materials 2:light materials 3:transparent 4:large hole net 5:small hole net
S45	前光眼动作阈值 Front sensor action value	50	5-200	
S46	中光眼动作阈值 Middle sensor action value	50	5-200	
S47	后光眼动作阈值 Back sensor action value	50	5-200	
S48	电机运转方向 motor running direction	1	0-1	0: 电机反转 1: 电机正传 0: motor counterclockwise 1: motor clockwise
S49	加速曲线 Acceleration curve	70	10-100	
S50	加速灵敏度 Acceleration sensitivity	6	1-6	
S51	光眼粗调启用 Sensor rough adjustment start	0	0-1	0: 关闭 1: 开启 0: close 1: open
S52	强自动剪线 Strong thread auto cutting	3	0-4	0:剪线最强保护 1:剪线强保护 2:剪线一般保护 3:剪线弱保护 4:剪线无保护 0: the strongest protection of thread cutting 1: Strong Protection of the thread cutting 2: General Protection of the thread cutting 3: Weak Protection of the thread cutting 4: no protection of the thread cutting
S53	光眼感应时间 Sensor sensitivity time	10	3-150	
S54	光眼解除感应时间 Sensor remove sensitivity time	10	3-150	

工人系参数列表：The workers system parameter list 表 2


序号 System parameter list	功能说明 Function description	功能参数默认值 Parameter default values	功能参数范围 Parameter Adjustment range	参数说明 Parameter description
P-01	操作模式 Operate mode	0	0~1	0: 半自动 1: 全自动 0: semi automatic 1: fully automatic
P-02	电眼开关 sensor switch	1	0~1	0: 关闭(全手工) 1: 开启(自由缝半自动全自动) 0:Closed 1:Open
P-03	剪线 cutting line	3	0~3	0: 关闭 1: 前剪线 2: 后剪线 3: 前后剪线 0: close 1: before the cut line 2: after the cut line 3: before and after the shear line

P-04	吸气 suction	3	0~3	0: 关闭 1: 前吸气 2: 后吸气 3: 前后吸气 0: closed 1: before the inspiration 2: after the inspiration of 3: before and after the inspiration
P-05	后拉布轮 back pulley wheel	0	0~2	0: 关闭 1: 缝制中 2: 缝制后 0: close 1: sewing in 2: after sewing
P-06	自动压脚 Auto foot presser	3	0~3	0: 无抬压脚 1: 前抬压脚 2: 后抬压脚 3: 前后抬压脚 0: no lifting of the foot 1: front lifting foot 2: after the lifting of the foot 3: before and after the lifting of the foot
P-07	启动速度模式 start speed mode	1	0~1	0: 自动 (依 P11 設定) 1: 脚踏板 0: automatic(according to P11) 1: pedal
P-08	停车针位 needle position	0	0~1	0: 上针位 1: 下针位 0: Upper needle stop position 1: down needle stop position
P-09	停车自动抬压脚 machine stop auto foot presser lifting	0	0~1	0: 关闭 1: 开启 (不限模式) 0: Closed 1: Open
P-10	手动吸气 suction by hand	1	0~1	0: 关闭 1: 开启 0: Closed 1: Open
P-11	启缝速度 start sewing speed	4800	200~5500	無說明
P-12	最大速度 Max speed	5000	200~5500	無說明
P-13	工作灯亮度 the degree of the working LED light	4	0~5	無說明
P-14	背光灯亮度 the backlight degree	1	0~1	0: 关闭 1: 开启 0: Closed 1: Open
P-15	半自动连续缝制 semi-auto continue sewing	0	0~1	0: 关闭 1: 开启 0: Closed 1: Open
P-16	半自动恒速剪线 semi-auto constant sewing	0	0~1	0: 关闭 1: 开启 0: Closed 1: Open
P-17	前放压脚 front foot presser lift	0	0~1	0: 自动模式 1: 手工模式 0: automatic mode 1: manual mode
P-18	脚控剪线 foot controller cutting line	0	0~2	0: 关闭 1: 全手工 2: 自由缝半自动 (布離開中 電眼後) 0: closed 1: full manual 2: free stitch semi-automatic (after the cloth leave the middle sensor)
P-19	中吸气 middle suction	0	0~1	0: 关闭 1: 开启 0: Closed 1: Open
P-20	半后踏抬压脚 half back foot presser lift	0	0~1	0: 关闭 1: 开启 0: Closed 1: Open
P-21	剪线后抬压脚 foot presser lift after cutting	0	0~1	0: 关闭 1: 开启 (後抬壓腳關閉時, 開啟無效) 0: Closed 1: Open
P-22	关闭手动抬压脚 close manual foot presser lift	0	0~1	0: 关闭 1: 开启 0: Closed 1: Open
P-23	自由缝开启 start free sewing	0	0~1	0: 关闭 1: 开启 0: Closed 1: Open
P-24	后剪线光眼延迟检测 back cutting line sensor delay check	1	0~1	0: 关闭 1: 开启 0: Closed 1: Open
P-25	松线 thread tension releasing	3	0~3	0: 关闭 1: 前松线 2: 后松线 3: 前后松线 0: close 1: front thread tension releasing 2: back thread tension releasing 3: front and back thread tension releasing
P-26	自动运行 auto running	0	0~1	0: 关闭 1: 开启 0: Closed 1: Open


P-27	自动跑合运行时间 auto running time	6	3~20	时间单位为：秒 The time unit is: Second
P-28	自动跑合运行停止时间 auto running stop time	2	2~20	时间单位为：秒 The time unit is: Second
P-29	电控版本 Control box version	V2.07		
P-30	显示屏版本 Panel version	V3.03		
P-31	音量调节 volume adjustment	020	0~25	
P-32	关闭开机语音 close the start voice	0	0~1	0: 关闭 1: 开启 0: close 1: open
P-33	网布模式 Net mode	0	0-1	0: 关闭 1: 开启 0: close 1: open
P-34	禁止上停针 Prohibition the upper needle stop position	0	0-1	0: 关闭 1: 开启 0: close 1: open
P-35	剪线计数 Thread cutting count no.	0	00000	一个流程计数一次，在该参数状态下长按 OK 键 清零或者从新开机即可。 A process count once, in the state of this parameter, Long Press ok key to clear zero or restart is ok.



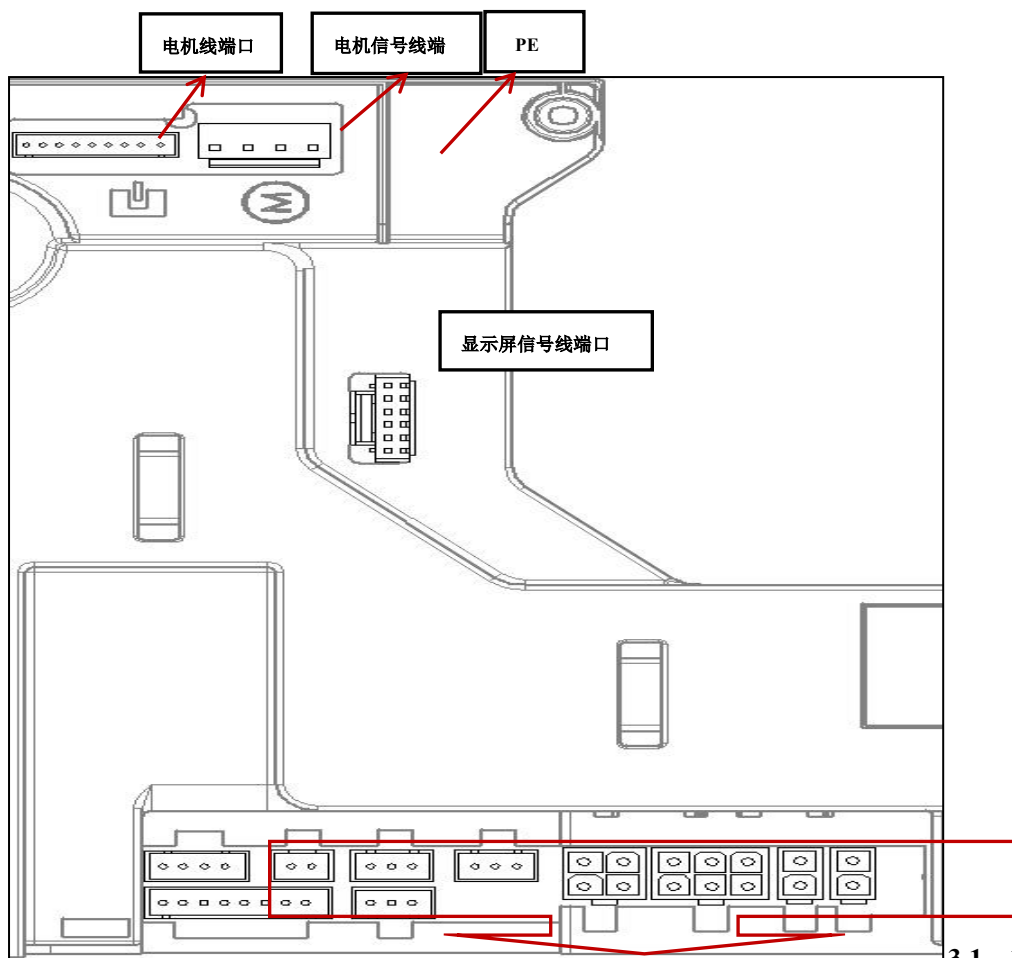

### 3：控制箱端口说明


## Control box interface instruction

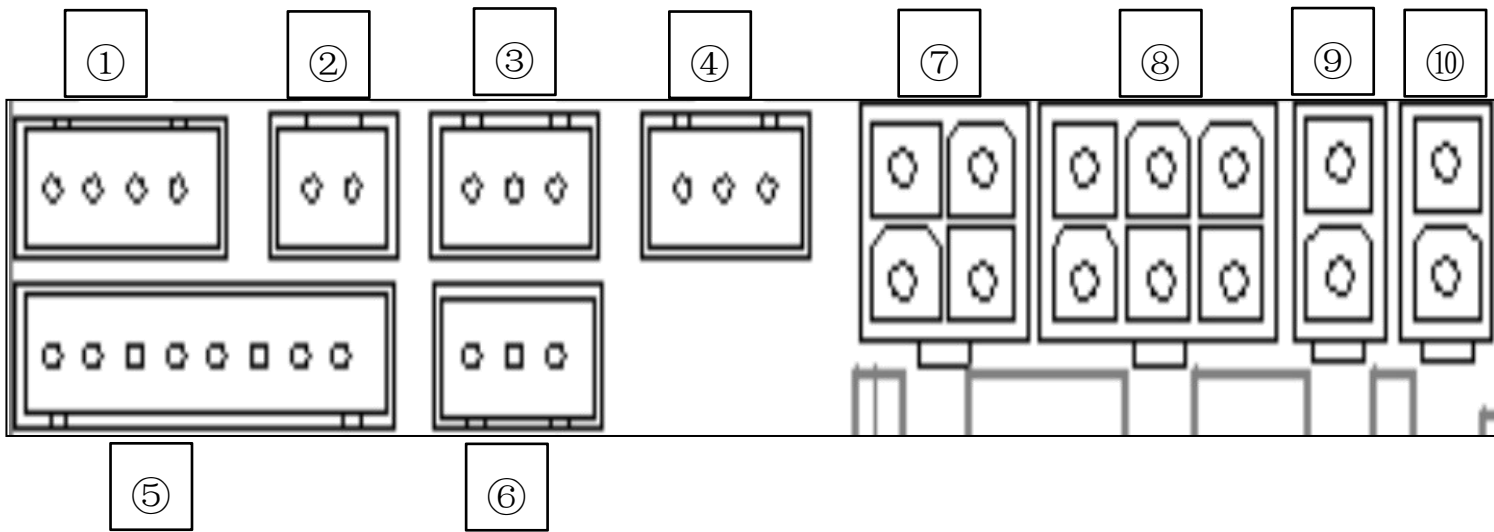


3.1、端子插口说明：




下光眼线端口		
①		<div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">5V</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">接收 IR · 2:信号</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">5V</div> <div style="border: 1px solid black; padding: 2px;">接收 IR · 1:信号</div>
第三光眼线端口		
②		<div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">5V</div> <div style="border: 1px solid black; padding: 2px;">接收 IR · 3:信号</div>
压脚壁安全开关线端口		
③		<div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">5V</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">信号</div> <div style="border: 1px solid black; padding: 2px;">GND</div>
预留端口		
④		<div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">5V</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">信号</div> <div style="border: 1px solid black; padding: 2px;">GND</div>
上光眼（一、二、三）和 LED 灯、剪线端口		

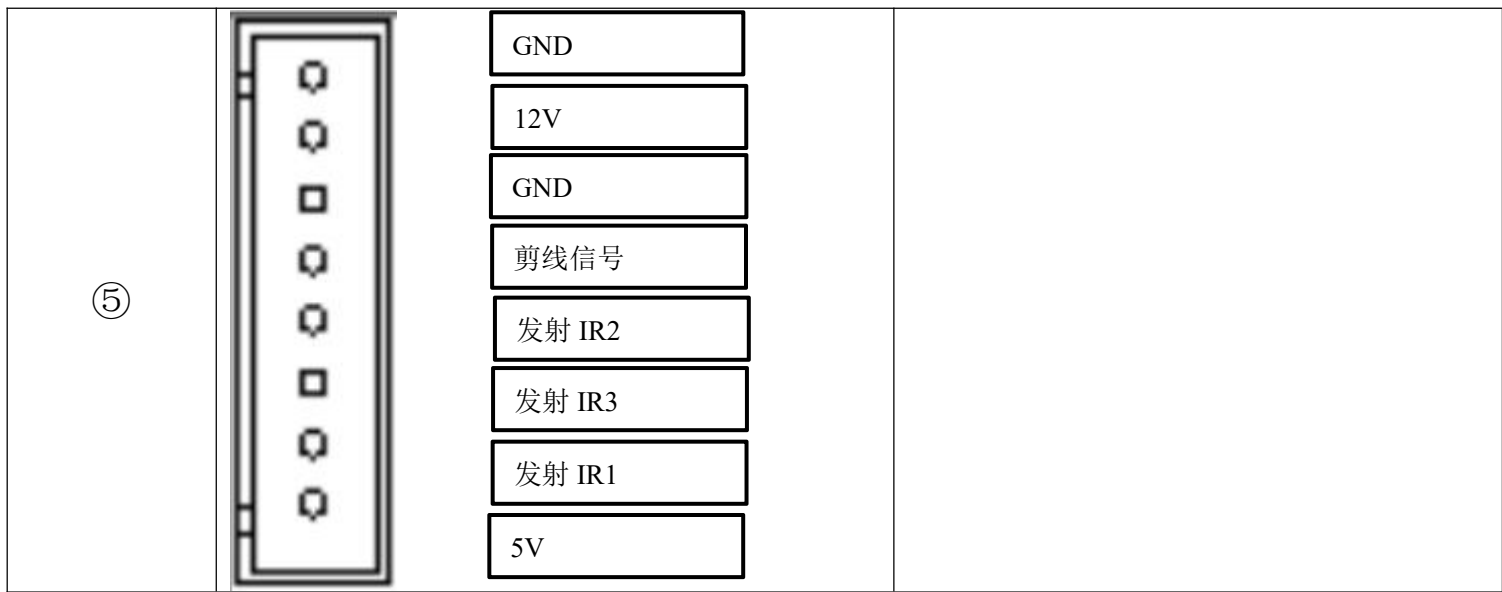


**缝台安全开光线端口**

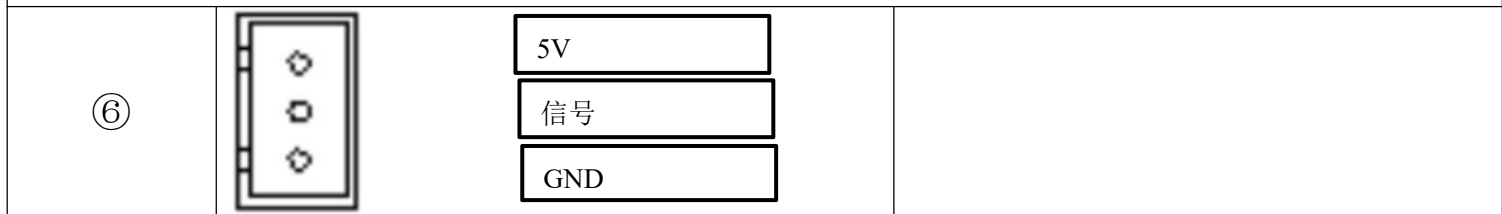


**调速器线端口**

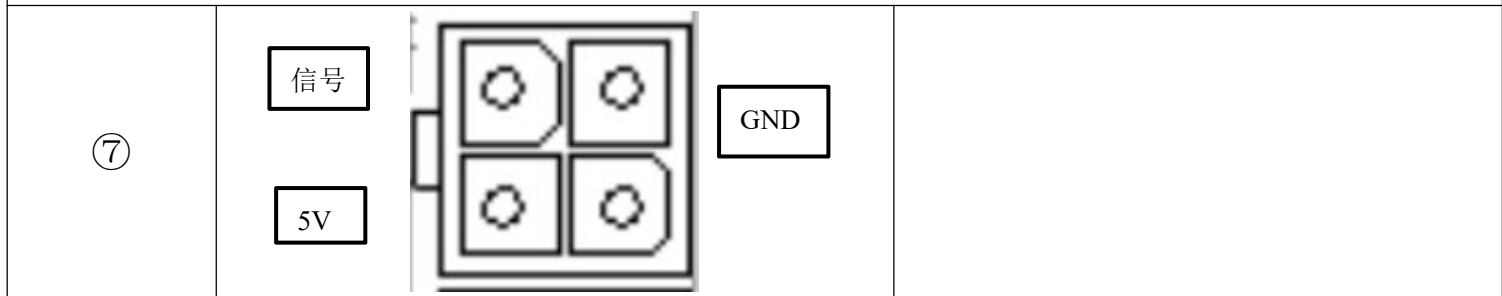


**6P 多功能端口**

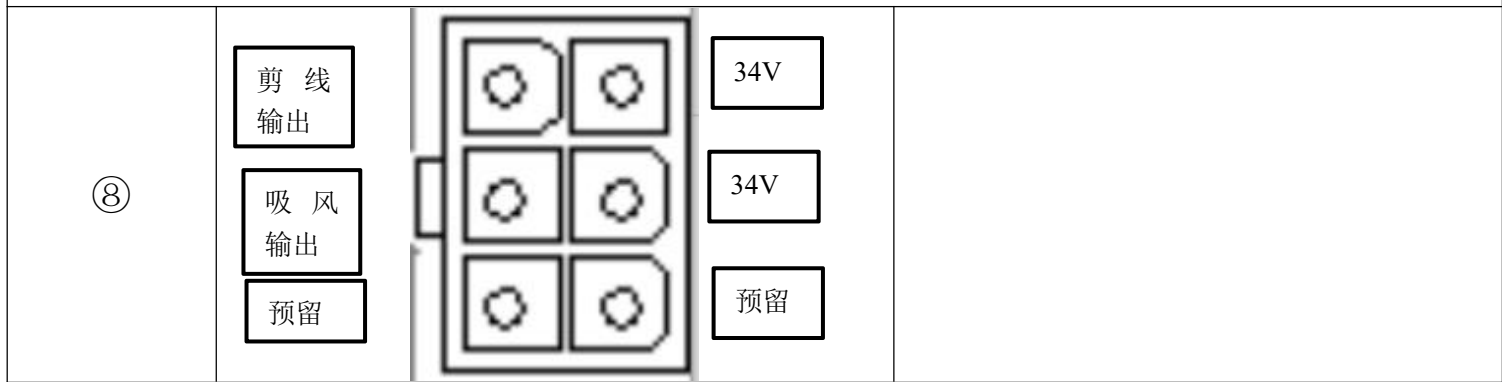

**预留端口**

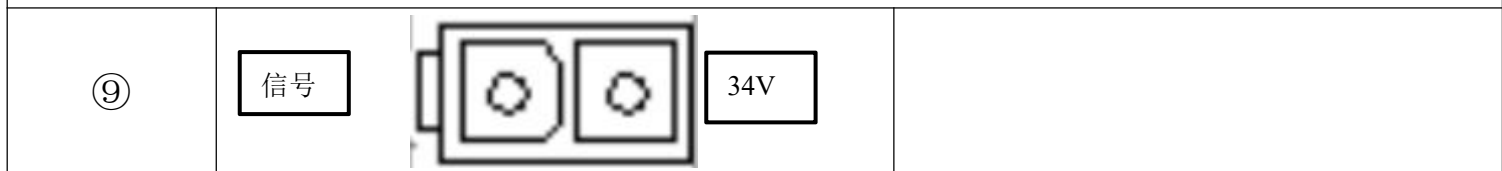

**抬压脚电磁铁线端口**

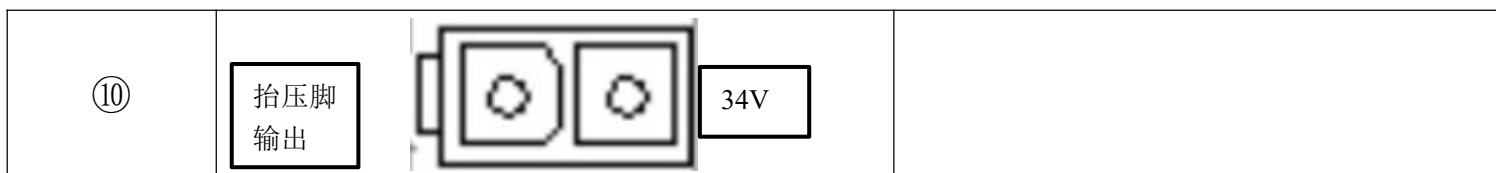

## 4: 故障代码解析 Error Code Resolution

故障代码 Error Code	故障描述 Error Description	故障产生原因 the reason of the Error	故障的解决方法 the resolution of the error
ER-01	找不到停针位 not find needle position	1:手轮和电机靠的不够进 2: 手轮上磁钢脱落 3: 手轮磁铁极性装反 4: 九针端子头接触不良 5: 电机霍尔损坏 1: hand wheel and motor is not enough. 2: hand wheel steel shed 3: hand wheel magnet polarity 4: bad contact terminal nine 5: motor Holzer damage	1: 检查电机信号线有无松动 2: 更换手轮 3: 更换电机 1: check whether the motor signal line is loose 2:replace the wheel 3: replace the motor
ER-02	调速器信号错误 Foot controller signal error	1: 开机时没插调速器 2: 调速器插反 3: 调速器线断开 4: 调速器损坏 1: start without connecting the foot controller 2: Foot controller plug back 3: the foot controller line is disconnected 4: Foot controller damage	1: 检查调速器信号线 2: 更换调速器 3: 更换控制器 1: check the foot controller signal line 2: change the foot controller 3: replace the foot controller
ER-03	电机相位信号错误 Motor phase signal error	1: 九针插头接触不良 2: 电机安装时霍尔和转子存在大偏差 3: 电机霍尔坏 1: bad contact of nine pin plug . 2: there is a large deviation in the installation of the motor hall and the rotor 3: motor hall bad	1: 打开电机上的橡皮盖通过孔看电机转子与定子是否在同一平面保障误差 不超过 1MM 2: 更换电机 3: 更换控制器 1: open the rubber cover on the motor through the hole to see whether the motor rotor and stator in the same surface to ensure the error is not more than 1MM 2:replace the motor 3: replace the control box
ER-04	电机堵转保护 Motor locked rotor protection	1: 缝纫机过重或堵死 2: 电机过载 3: 电机 4 线驱动线没连接好或插反 1:sewing machine is over weight or blocked 2: motor overload 3: motor 4 wire drive line is not connected or inserted back	1: 检查电机 4P 线 2: 检查缝纫机是否过重 3: 更换控制器 1: check motor 4P line 2: check whether the sewing machine is too heavy 3: replace the controller
ER-05	硬件过流保护 Hardware overload protection	1: 缝纫机过重或堵死 2: 电机过载 3: 电机相位信号线没连接好 1: sewing machine is overweight or blocked 2: motor overload 3: motor phase signal line is not connected	1: 检查显示屏与控制器连接线 2: 检查控制器是否还可运行, 如不能运行就是控制器损坏
ER-07	显示屏和主板通讯超时 Serial communication timeout	1: 显示屏连接主板线连接不良 2: 主板芯片损坏 1: Connect error between display	

		panel and mainboard 2: motherboard chip damage	3: 检查机器旁是否有高频机器干扰 4: 更换显示屏 1: Check the connection line between the display screen and the control box. 2: check whether the controller run well, if not, controller damage 3: check whether there is a high frequency machine near the machine interference 4: change the display panel
ER-09	存储器不良 memory error	1:主板存储器损坏或不良 1: Memory on mainboard damage or error	1: 控制器损坏 1: control box damage
ER-10	光眼控制线路故障 Sensor control line error	1:显示屏连接光眼线路不良 1: Connect error between display panel and sensor	1: 显示屏损坏 2: 显示屏背部光眼连接线接触不良 1: display panel damage 2: Connect error between display panel and sensor
ER-15	编码器故障 the motor board error		
ER-16	过压 Over load	电机驱动电源电压过高, 220V 电源电压超过限定值 (AC310V), 或负载惯性过大导致再生电压超过限定值(DC440V),或电压检测回路故障。 注: (110V 控制系统电源电压超过限定值 (AC155V), 或负载惯性过大导致再生电压超过限定值(DC220V)). 1. The motor drive power supply voltage is too high, the 220V power supply voltage exceeds the limit value(AC310V), or the load inertia is too large to the regenerative voltage exceeds the limit value(DC440V), or the voltage detection circuit fails. Note:(110V control system power supply voltage exceeds limit value(AC155V), or load inertia is too large to regeneration voltage exceeds limit value(DC220V).	
ER-17	A 相电流检测故障 A current checking error		
ER-18	B 相电流检测故障 B current checking error		
ER-19	AB 相电流检测故障 A&B current checking error		
ER-20	欠压故障 Less volt error	1.电机驱动电源电压过低, 220V 电源电压低于限定值 (AC91V), 或电机驱动电源电压低于限定值 (DC130V),或电压检测回路故障。 注: (110V 电源电压低于限定值 (AC45.5V), 或电机驱动电源电压低于限定值 (DC65V)) 1. The motor drive power supply voltage is too low, the 220V power supply voltage is lower than the limit value(AC91V), or the motor drive power supply voltage is lower than the limit value(DC130V), or the voltage detection circuit fails. Note:(110 V power supply voltage is below the limit(AC45.5 V), or motor drive power supply voltage is below the limit(DC 65V))	



高林股份有限公司  
KAULIN MFG. CO., LTD.

由於對產品的改良及更新，本產品使用說明書中與零件圖之產品及外觀的修改恕不事先通知！  
The specification and/or the equipment described in the instruction book and parts list  
are subject to change because of modification with out previous notice  
600N.JAN.2026