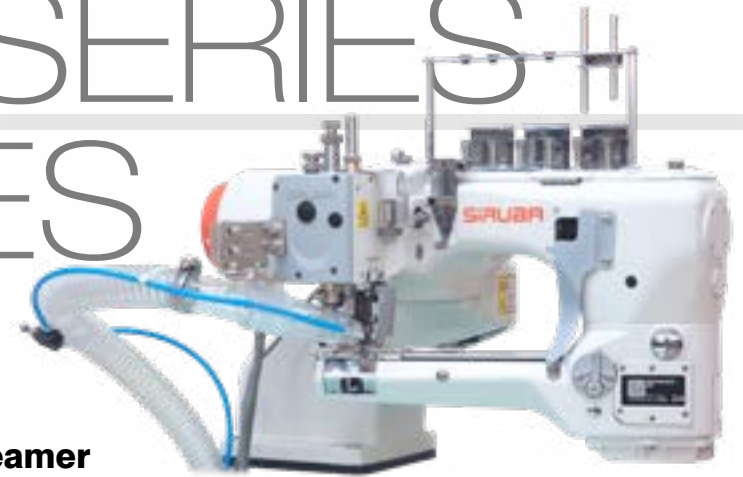


D007SP SERIES FEATURES

D007SP

四針六線曲臂式併縫機

4 Needle 6 Thread Feed-off-the-arm Flatseamer



D007SP為全新的進階款，專為貼身衣物與機能型運動衣的疊併縫所設計，提供即強韌又柔和的車縫效果

All new D007SP realizes the strong and delicate sewing quality for intimate fit wear and high-end sportswear's flat-seaming.

特點 FEATURE

線道採精密陶瓷設計，使過線收線更加順暢，線跡更均勻穩定，有效提升車縫效果。

The ceramic precision design of the line that makes the winding line is smooth. Stitches are better stable and average, and the sewing effect is effectively improved.

驅動馬達與機體結合採一體成形設計，避免組裝誤差，有效降低車體振動。

The driving motor is combined with the sewing machine to form a single machine. Design to avoid assembly errors and effectively reduce sewing machine vibration.

針座部位改採全包覆一體式設計，杜絕漏油的可能性。

The needle seat is changed to a fully covered and integrated design to prevent the possibility of oil leakage.



D007SXP

四針六線曲臂式併縫機附外撥式針距調整撥桿 4 Needle 6 Thread Feed-off-the-arm Flatseamer Interlock Sewing Machine with Stitch-length Adjustment Lever



特點 FEATURE



延續D007SP之特點，外加外撥式針距調整撥桿設計，可輕易調整各式差動量，滿足各種布類所需之車縫品質。

D007SP features with the new design stitch-length adjustment lever for easy adjustment on the differential range, ensuring consistent stitch quality on different types of fabrics.



配件 DEVICE

AW1 外接空壓式吸布屑組 *需外接空壓機
External compressor type waste suction set
*for compressor compatible

AK 電眼氣動切線組
Sensor controlled pneumatic type chain cutter

AW2 吸風馬達式吸布屑組
Suction motor type waste suction set

LFA 電動式直向送帶裝置(搭配T1)
Electric Type Upper Tape Feeding Device (for T1)

AW7 外接空壓式吸布屑組 *需外接空壓機(搭配AK)
External compressor type waste suction set
*for compressor compatible (for AK)

LF290 抖帶輪(搭配LFA)
Untangle Wheel (for LFA)



AW1



AW2



AK



LFA



LF290

規格

SPECIFICATIONS

D007SP - 4 52 - 02 R - T2 - AT/ AK

規格索引，詳細請參考P.174 Specification index, please refer to P.174

① 機種別 Model

② 針數 Needle Numbers

③ 針距 Needle gauge









④ 切刀 Trimmer

⑤ 特殊規格 Special Specification

⑥ 車縫功能 Seaming Function

⑦ 抬壓腳規格 Foot Lifter Specification

















⑧ 配件 Device

DS01								
D007SP/SXP-4 ③-01	4	6	4.8/5.2/6.0	1.6 2.5	1:0.7 1:1.5	8	FL X 118GCS (4 PCS) FLG - 1 (1 PC)	4200
D007SP/SXP-4 ③-02	4	6	4.8/5.2/6.0			6		
D007SP/SXP-4 ③-02R	4	6	4.8/5.2/6.0			6		
D007SP/SXP-4 ③-02H	4	6	5.2/6.0			6		
D007SP/SXP-4 ③-01-S	4	6	5.2/6.0			8		
D007SP/SXP-4 ③-02-S	4	6	5.2/6.0			6		
D007SP/SXP-4 ③-02-T1	4	6	4.8/5.2/6.0			6		
D007SP/SXP-4 ③-01-T2	4	6	5.2/6.0			8		
D007SP/SXP-4 ③-02-T2	4	6	5.2/6.0			6		

Remarks :

FLG -1 為假針規格，避免車縫薄軟面料之縫份起皺。

FLG - 1 is a retainer for seaming light / soft materials without seam wrinkling.

Model	Trimming	Cross-section	Fabric Weight		
			Light	Medium	Heavy
D007SP/SXP-4 ③-01					
D007SP/SXP-4 ③-02					
D007SP/SXP-4 ③-02R					
D007SP/SXP-4 ③-02H					
D007SP/SXP-4 ③-01-S					
D007SP/SXP-4 ③-02-S					
D007SP/SXP-4 ③-02-T1					
D007SP/SXP-4 ③-01-T2					
D007SP/SXP-4 ③-02-T2	