

# DL720 SERIES FEATURES

銀箭牌

## DL720

直驱单定针平缝车

**Direct-drive needle positioning  
lockstitch machine**



### 特点

### FEATURES

- 机电一体化的完美整合，内置电控箱及控制台，安装简易，使用方便
- 直驱伺服马达，反应快速，动作精准，比离合器马达省电60%
- 使用方便：配备LED照明，内置式绕线器与补针功能

- Mechatronic integration with built-in control box and control panel. It is easy to install and operate.
- Direct-drive servo motor is speedy, accurate, and energy-saving than clutch motor by 60%.
- User friendly: Equipped with LED light, built-in bobbin winder, and stitch compensation function.

## DL720-RM1

直驱单定针带刀平缝车

**Direct-Drive Needle Positioning  
Lockstitch Machine & Edge Cutter**




采用内置式直驱伺服马达，实现了机器的快速启动和制动的精确度：大幅度降低了噪音和振动，并降低了能耗，与普通的驱动装置相比，电量耗减35%以上，适用于缝制各类衬衫、西服或类似服装，特别是其衣领、前襟等部位，高速缝制时倒顺送料针距能保持完全一致，侧切刀装置使缝纫和修刀工序一次完成，工作效率提高。

With built-in direct drive servo motor to achieve the accuracy of the machine's rapid start-up and braking; a significant reduction in noise and vibration, and reduce energy consumption, compared with conventional drive unit, battery depletion of 35% or more, suitable for sewing various shirts, suits or similar garments, especially its collar, breast and other parts, inverted send high-speed sewing material pitch to be completely consistent, side cutter device sewing and knife trimming procedures in one time efficiency.

**SIRUBA**

# RM1 特点

# FEATURES

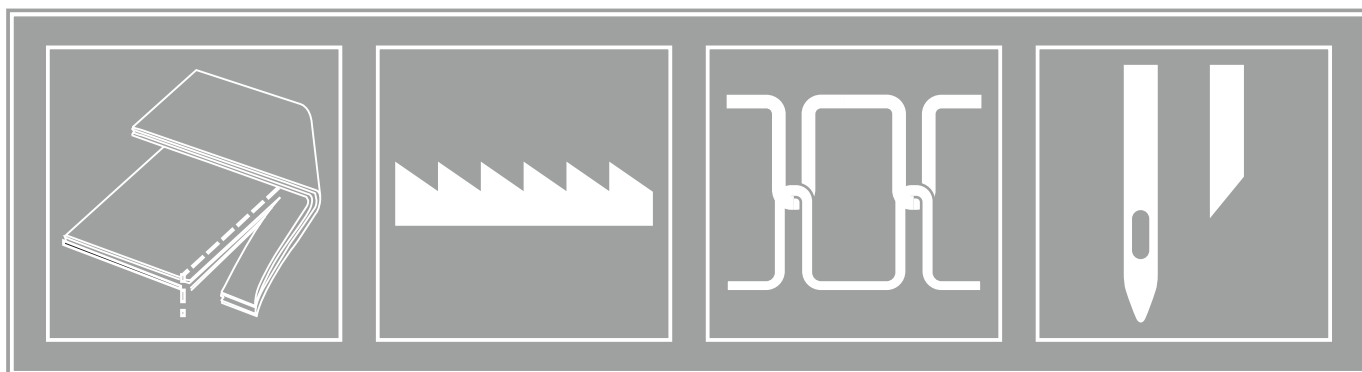

- 30mm落料空间:**  
废料从落料口自然滑落，每时每刻保持清爽乾淨。  
**30mm space:**  
30mm space for giving up the waste, it brings out with a clean working space.
- 黑金刚镀层:**  
刀架导杆均采用DLC涂层处理，更耐用更耐磨。  
**Special black coating:**  
Cutter's stick is made with DLC coating which helps to increase durability.
- 简易定针型可搭配喇叭组，进行布条滚边车缝（喇叭为三折卷，入布宽度28mm，出布宽度8~10mm）**  
Needle position function models can equip with binders, to perform tape binding. (Binders are with 3 folders; entering width is 28mm, exiting width is 8~10mm for material.)



## 规格

## SPECIFICATIONS

DL720	mm	mm	Needle No. DB × 1	布料厚度 Fabric Weight			手动 Hand	膝动 Knee	mm	S.P.M. (Max)
				L	M	H				
M1	15.8		#11~#14				5.5	13	0-4	4000
H1	18.0		#18~#21						0-5	3500
M1A	15.8		#11~#14						0-6.5	4000

DL720	mm	mm	Needle No. DB × 1	布料厚度 Fabric Weight			手动 Hand	膝动 Knee	mm	S.P.M. (Max)
				L	M	H				
RM1-32	3.2	15.8	#11~#14				4	10~13 (可调 Adjustable)	0~4	3700
RM1-48	4.8									
RM1-64	6.4									

※选配桌板: DL7000T-T1 ※OptionalTable : DL7000T-T1



由於对产品的改良及更新，本产品型录中之产品规格及外观的修改恕不事先通知！  
The specification and/or appearances of the equipment described in this catalogue are subject to change without previous notice because of modification.

C.S2023-18. APR. 2023